

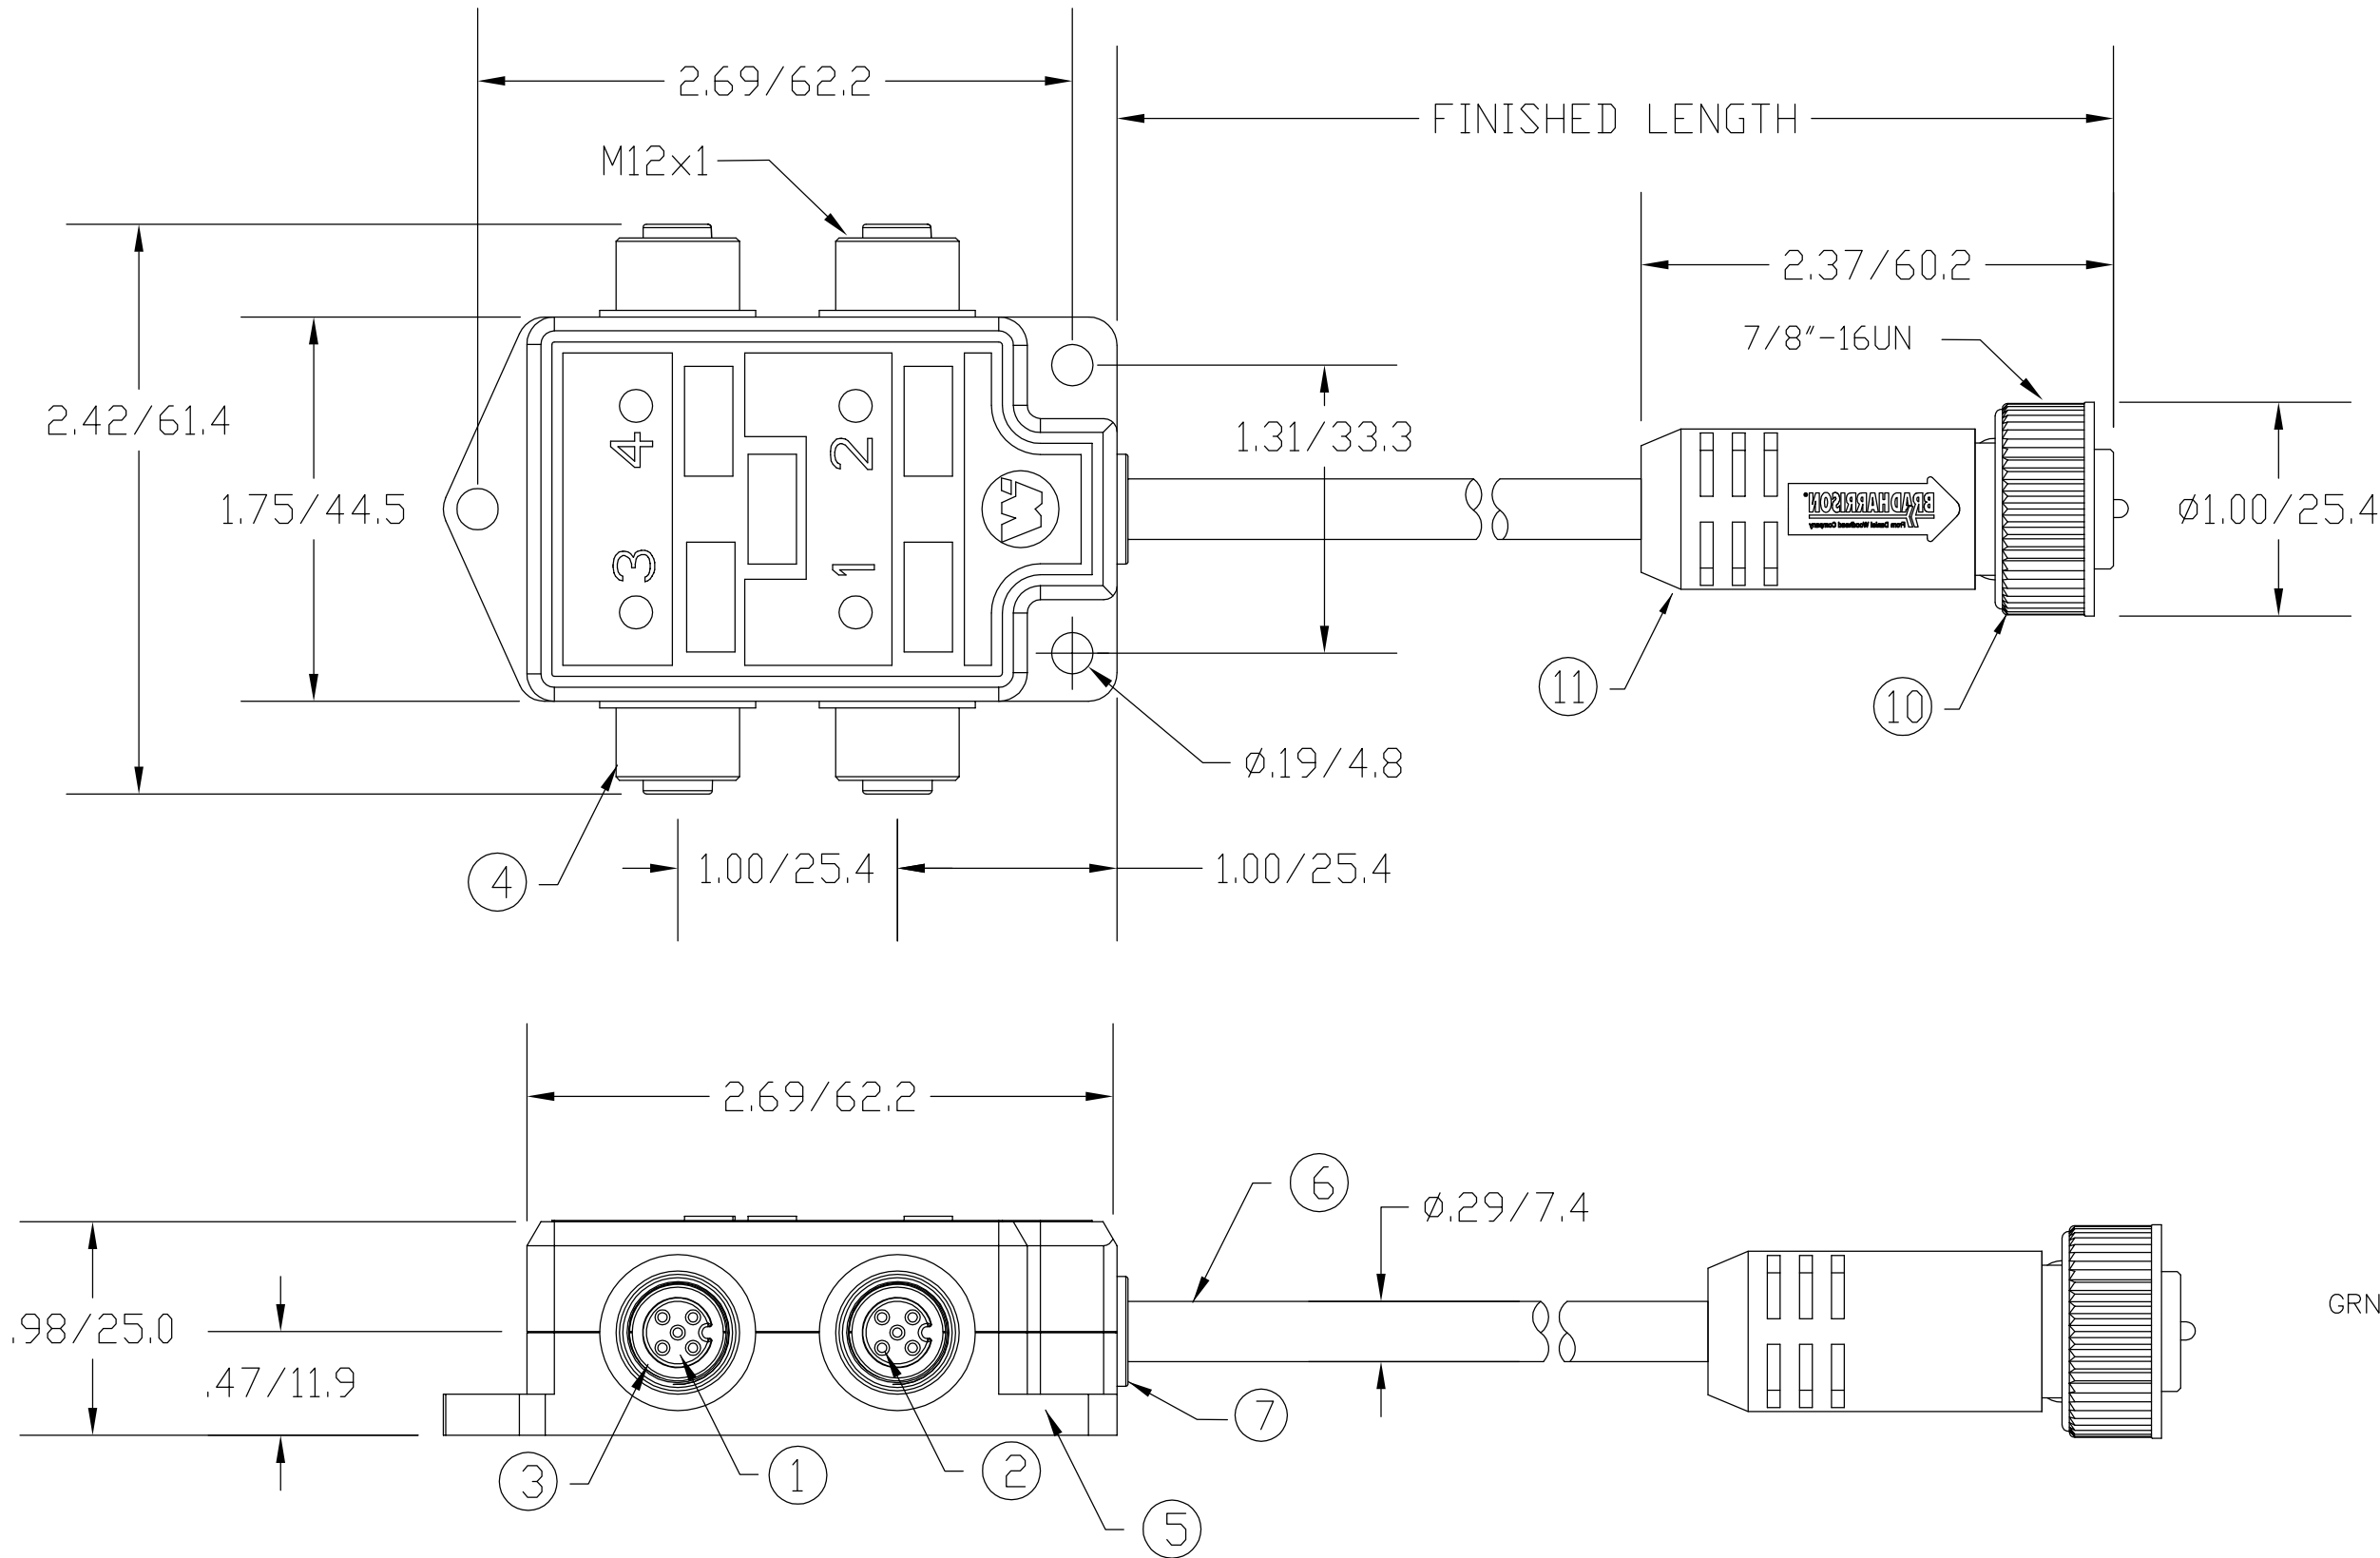



MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
120115-0047	803P402	1.00' +.75" -0 [3M +19.1 -0]

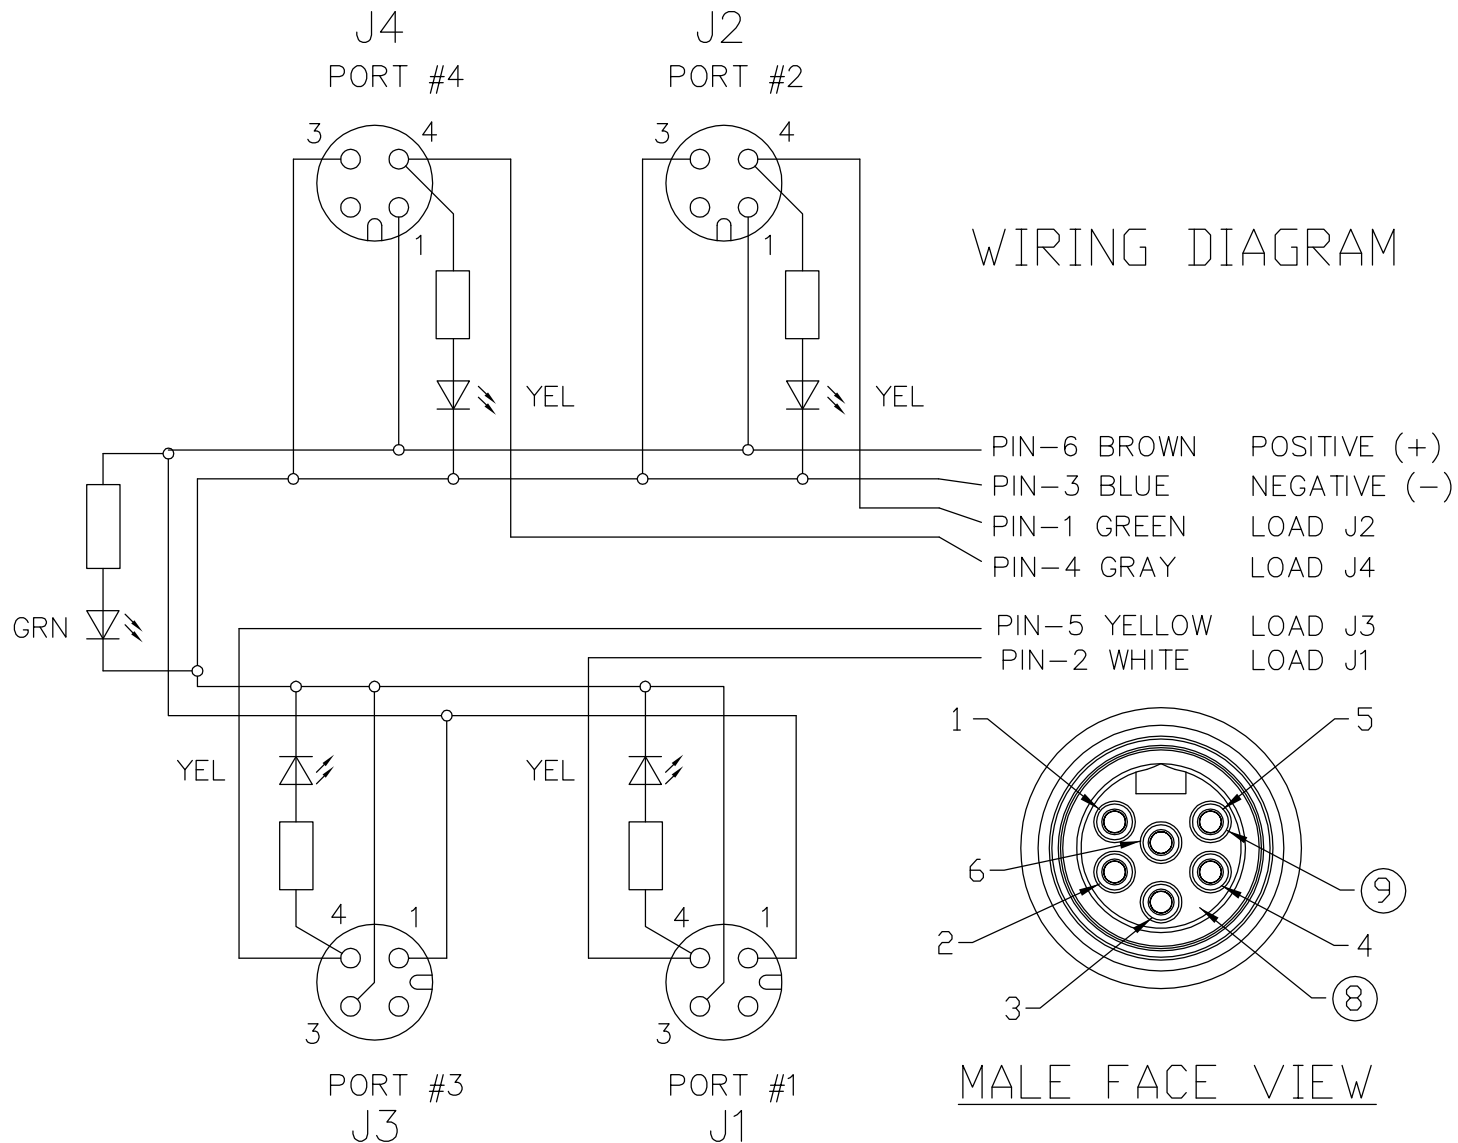

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	NITRILE	RED
4	RECEPTACLE SHELL	ZINC DIE CAST	BLACK E-COATED
5	HOUSING	NYLON	YELLOW
6	CABLE- 18AWG, (41 X #34), 1 CONDUCTOR; 22 AWG (26 x #36), 5 CONDUCTOR, 300V	PVC	YELLOW
7	GROMMET	NITRILE	BLACK
8	INSERT	PVC	YELLOW
9	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
10	COUPLING NUT	ZINC DIE CAST	BLACK E-COATED
11	OVERMOLD	PVC	YELLOW

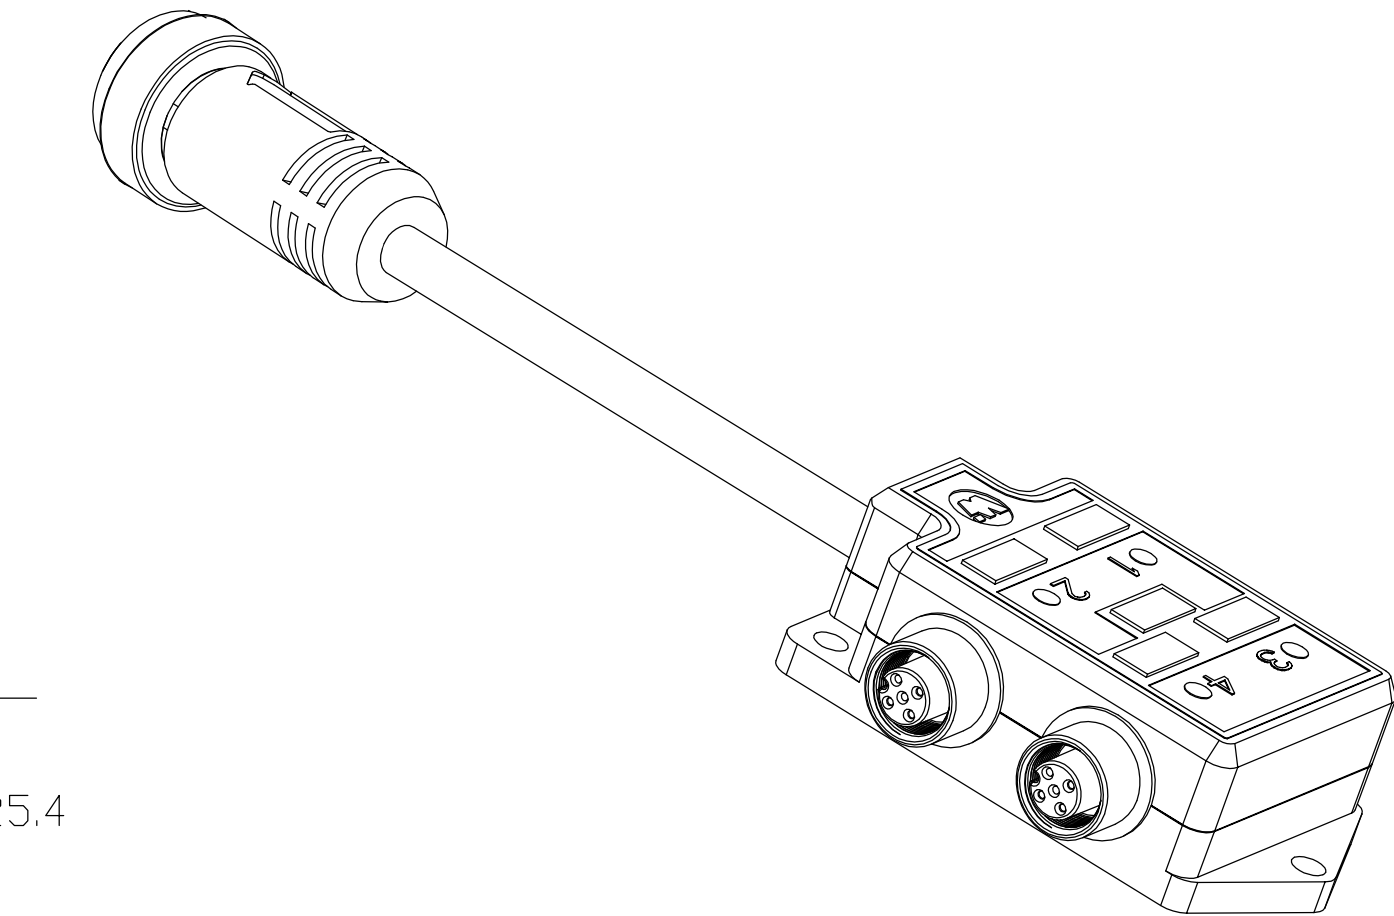

VOLTAGE RATING	10-30 VDC
AMPERAGE RATING PER PORT	4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 90°C

RLSD DRAWING EC NO: WNA2009-0641 DRWN: BWOODMAN 3/30/09 CHKD: JM APPR: JFMURPHY 2009/04/08 A	DESCRIPTION REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ----	DESIGN UNITS ----	THIRD ANGLE PROJECTION		
		 =0		mm	INCH	DRAWN BY BW	DATE 2009/03/31	TITLE MICRO-CHANGE MPIS 4 PORT SIDE MOUNT PNP MC 6P M/MP PVC				
		 C=0	4 PLACES	±---	±---	CHECKED BY VO	DATE 2009/03/31					
			3 PLACES	±---	±---	APPROVED BY	DATE	molex MOLEX INCORPORATED				
			2 PLACES	±---	±.01	----	----					
			1 PLACE	±0.3	±---	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-120115-003		SHEET NO. 1 OF 1		
		ANGULAR ±---°			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												