
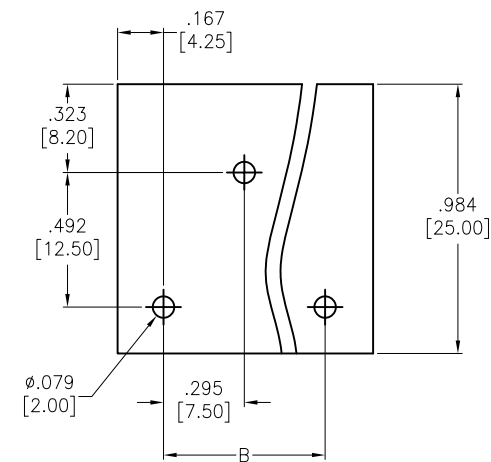
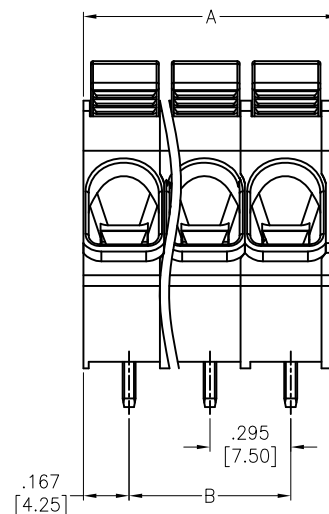
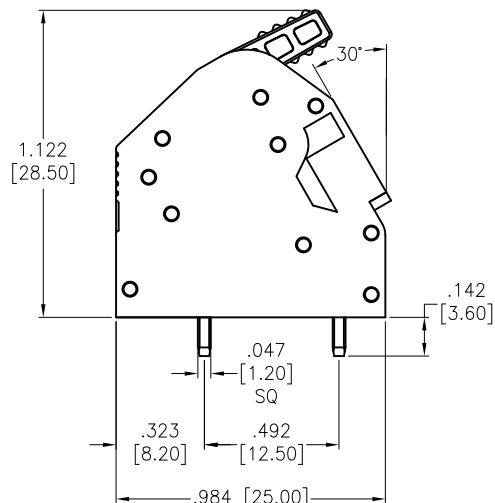


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/23/19	



RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contacts : Copper Alloy, Tin plated

Electrical:

Voltage rating: 600 V

Current rating: 27 A

Dielectric withstanding voltage: 2,200 V for 1 minute

Mechanical:

Wire range: 10~24AWG

Wire strip length: 15-16mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 01 thru 24

A= .295 [7.50] x No. of Positions + .047 [1.20]

B= .295 [7.50] x No. of Space

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	OW	9/23/19
CHECKED	EY	9/23/19
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		.295 [7.50] PITCH SPRING CLAMP	
		TERMINAL BLOCKS, RIGHT ANGLE	
SIZE	PART NO.	REV.	
X	EB171SA-XX-M	-	
REF:	S00067C	SCALE:	NTS
		SHEET 1 OF 1	