


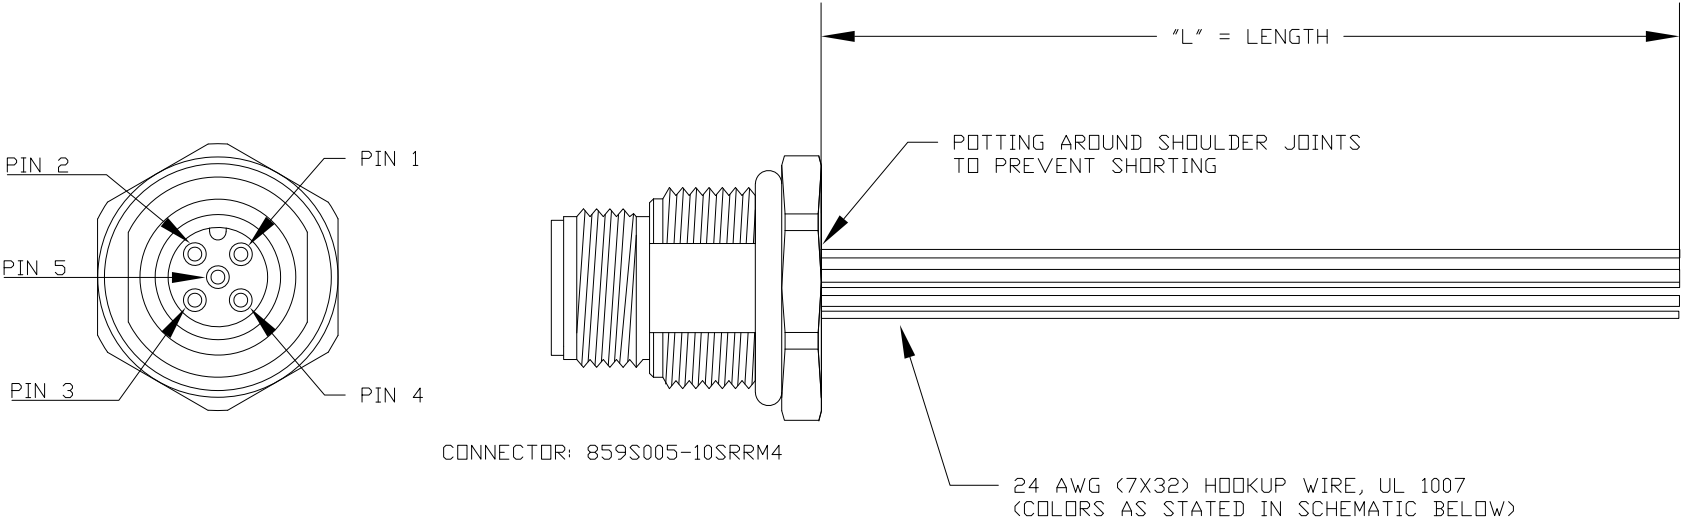

**SEE PAGE 2 FOR DETAILS

WIRING SCHEMATIC	
1	2
PIN	PIN
1 = BROWN	1 = RED
2 = WHITE	2 = GREEN
3 = BLUE	3 = BLACK
4 = BLACK	4 = WHITE
5 = GREY	5 = GREY

MPM12A05IYYDR0Y

INCHES

01 = WIRING SCHEMATIC 1
02 = WIRING SCHEMATIC 2


LENGTH
EX: 06 = 6 INCHES
12 = 12 INCHES

NOTE: PACKAGED 10 PER BAG


RoHS COMPLIANT

UNITS IN INCHES [MM] DO NOT SCALE FROM DRAWING

DESCRIPTION: M12 5 POSITION STAINLESS STEEL MALE PIGTAIL

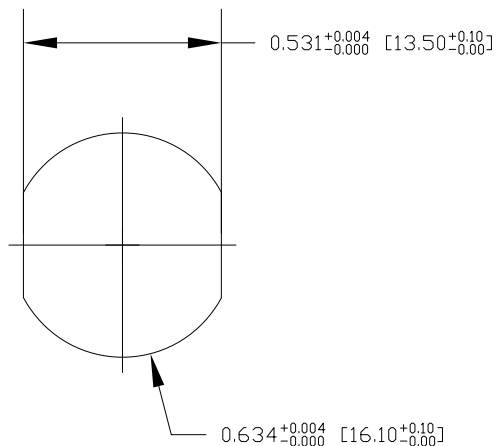

RECOMMENDED PANEL CUT-OUT

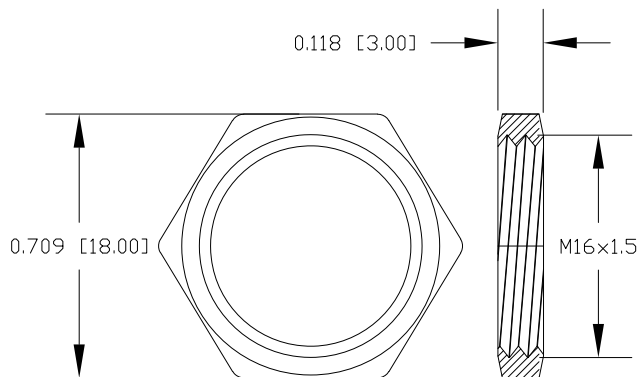

NUT

NOTE:

MATERIAL

HOUSING:
CONTACT:
NUT:
SHELL:
O-RING:

PBT UL94V-0, BLACK
BRASS
STAINLESS STEEL 316
STAINLESS STEEL 316
EPDM, BLACK

FINISH

CONTACT:
UNDER PLATE:

GOLD PLATED 10μ" Min.
NICKEL



ELECTRICAL

RATED CURRENT:
RATED VOLTAGE:
INSULATION RESISTANCE:
CONTACT RESISTANCE:
WATER PROOF:

4A
60V
100MΩ MIN
10mΩ MAX
IP67/68

ENVIRONMENT

OPERATION TEMPERATURE: -40°C ~ +85°C

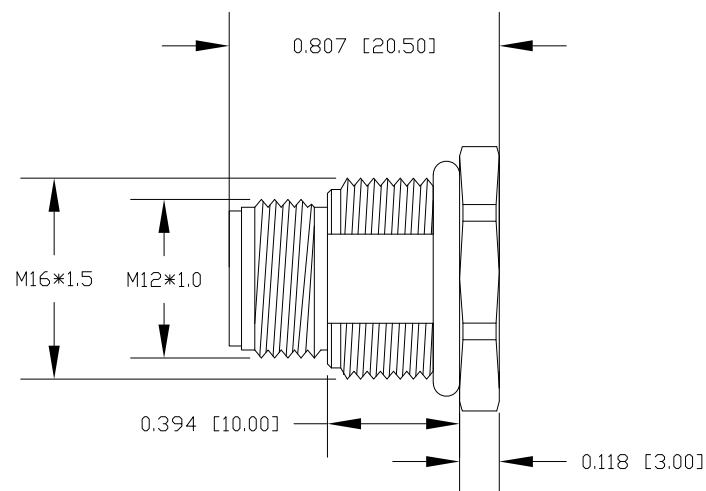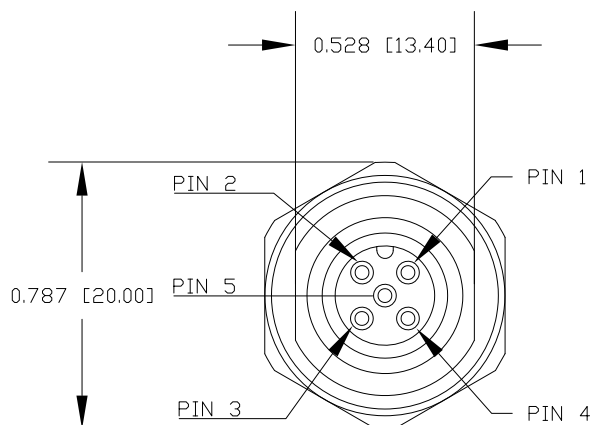

RoHS COMPLIANT

UNITS IN INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
G. BROWN

DATE:
01/23/2019

NorComp

SCALE:
NTS

SHEET OF
2 2

REV
2

DWG NO.

MPM12A05IYYDR0Y