
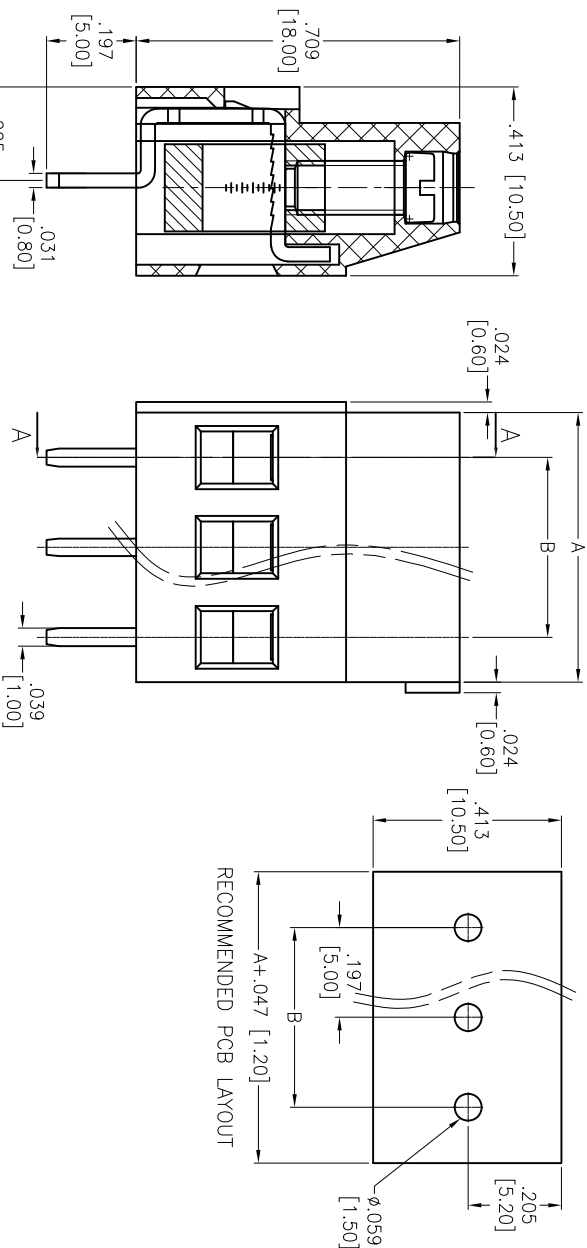


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/25/14	

APPROVED: _____

DATE: _____ TITLE: _____

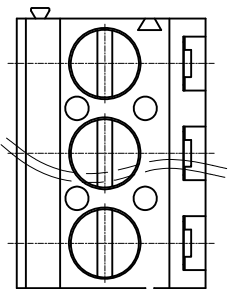

SPECIFICATIONS:

Material: PA66, rated UL 94V-0
Insulator color: Green
Screw: Steel, M3.0/Zinc plated
Cage: Brass, Nickel plated
Pin Header: Brass, Tin plated
Electrical:
Voltage rated: 300 VAC
Current rated: 16 Amps
Contact resistance: 20 mΩ
Insulation resistance: 500 MΩ @ 500 VDC
Withstanding voltage: 2000V AC/1 Min
Mechanical:
Solid wire: 26-12AWG 2.5mm²
Torque (Lb-in): 0.5Nm (4.5lb-in)
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant.



Positions: 02 thru 24
A = .197 [5.00] x No. of Positions
B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES				Holes			
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY		8/25/14				
CHECKED	SC		8/25/14				
APPROVED							
TITLE				EURO BLOCK, .197 [5.00] PITCH			
SIZE				PART NO.			
X				EB147A-XX-C			
REF: S00067C				SCALE: NTS			
				SHEET 1 OF 1			