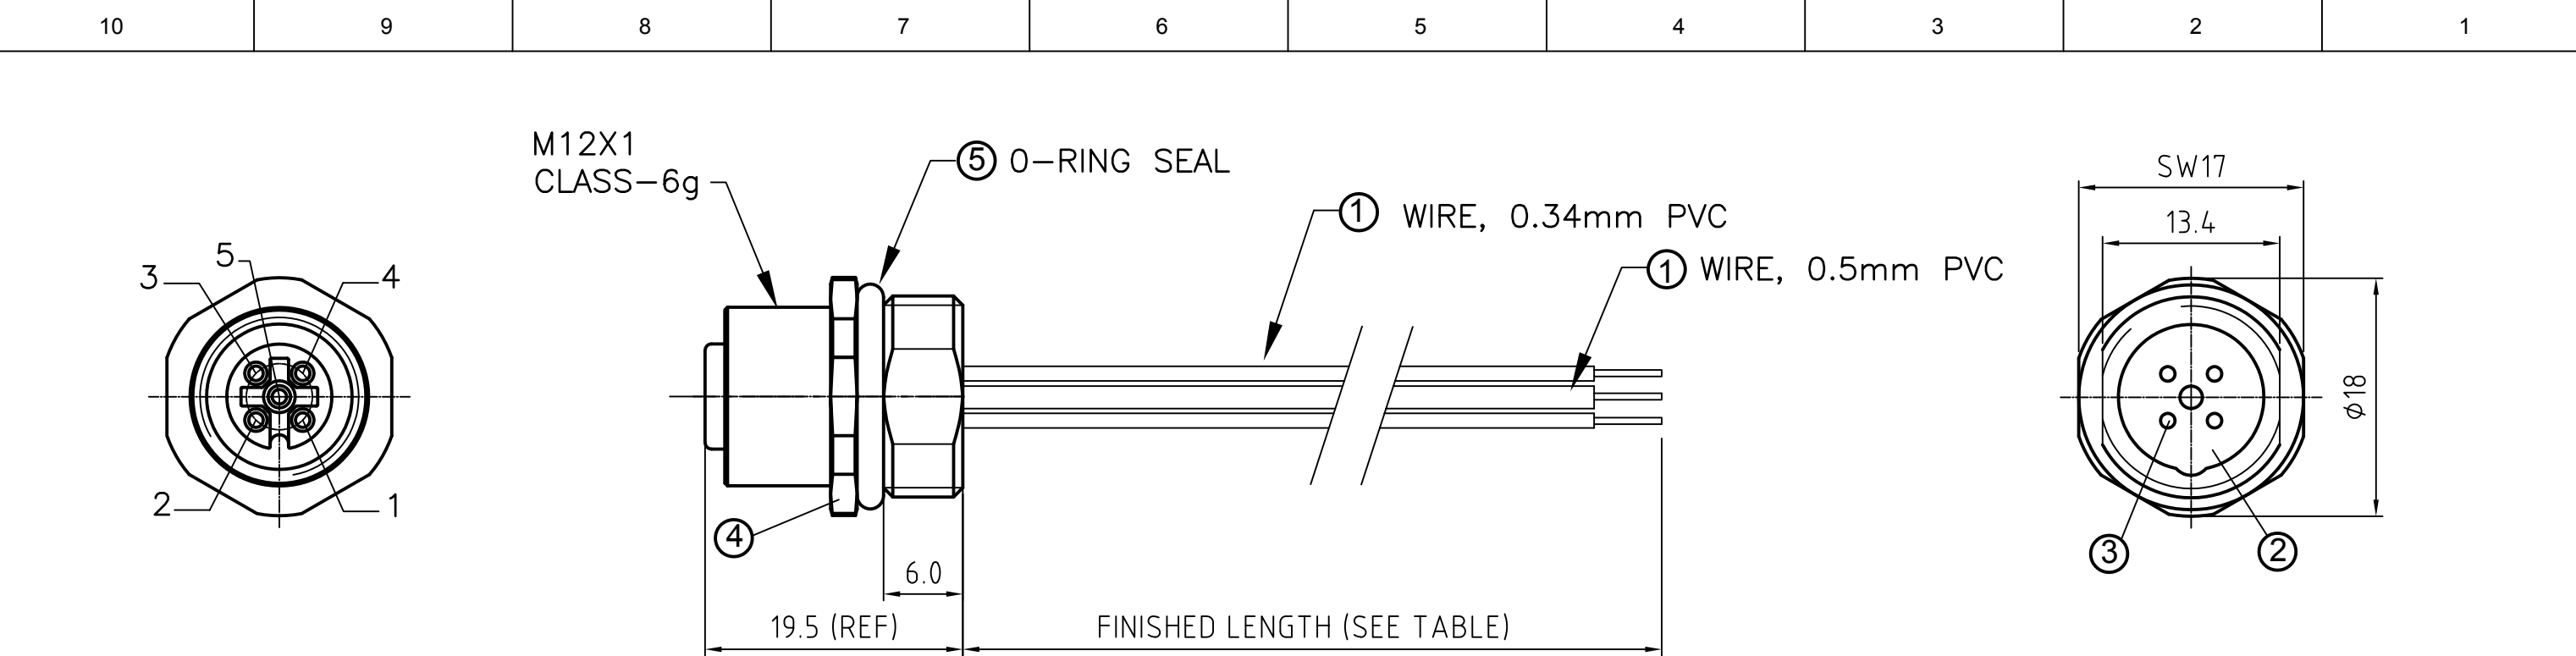




POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200705201	8R3J20E03C3003	0.3M ±10 -0 [0.98' +1.75" -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200705205	8R4J20E03C3003	0.3M ±10 -0 [0.98' +1.75" -0]




POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200705207	8R5J20E03C3003	0.3M ±10 -0 [0.98' +1.75" -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP68
OPERATING TEMPERATURE	-20°C TO +80°C
ASSEMBLY IS RoHS COMPLIANT	

ITEM	COMPONENT	MATERIAL	FINISH
5	O-RING	VITON	BLACK
4	RECEPTACLE SHELLS	BRASS	NICKEL PLATED
3	CONTACT SOCKET	F.C.BRASS ASTM B16	GOLD OVER NICKEL
2	INSERT	NYLON 6/6	-
1	1-4 0.34 CONDUCT. 5 0.5 CONDUCT. 300V	PVC	-

FEMALE FACE VIEW

3 WIRE	4 WIRE	5 WIRE																														
																																
<table><tr><th>Pin No.</th><th>Wire</th></tr><tr><td>1</td><td>Brown</td></tr><tr><td>3</td><td>Blue</td></tr><tr><td>4</td><td>Black</td></tr></table>	Pin No.	Wire	1	Brown	3	Blue	4	Black	<table><tr><th>Pin No.</th><th>Wire</th></tr><tr><td>1</td><td>Brown</td></tr><tr><td>2</td><td>White</td></tr><tr><td>3</td><td>Blue</td></tr><tr><td>4</td><td>Black</td></tr></table>	Pin No.	Wire	1	Brown	2	White	3	Blue	4	Black	<table><tr><th>Pin No.</th><th>Wire</th></tr><tr><td>1</td><td>Brown</td></tr><tr><td>2</td><td>White</td></tr><tr><td>3</td><td>Blue</td></tr><tr><td>4</td><td>Black</td></tr><tr><td>5</td><td>G/Y</td></tr></table>	Pin No.	Wire	1	Brown	2	White	3	Blue	4	Black	5	G/Y
Pin No.	Wire																															
1	Brown																															
3	Blue																															
4	Black																															
Pin No.	Wire																															
1	Brown																															
2	White																															
3	Blue																															
4	Black																															
Pin No.	Wire																															
1	Brown																															
2	White																															
3	Blue																															
4	Black																															
5	G/Y																															

DESCRIPTION EC NO: WEU2010-0391 DRWN: LSTEMMLE 2010/02/26 CHKD: NS APPR: NSTAUDIG 2010/03/03	DESCRIPTION	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/26	MMC-3-5P-FE-REC-PG9-XM PVC 0.34 WIRE FRONT MOUNTING			
			4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/03/01				
			3 PLACES	±---	±---	APPROVED BY	DATE				
			2 PLACES	±---	±.01	NSTAUDIG	2010/03/03				
			1 PLACE	±0.3	±---	MOLEX INCORPORATED					
			ANGULAR ± --- °								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120070-019			SHEET NO. 1 OF 1
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							