
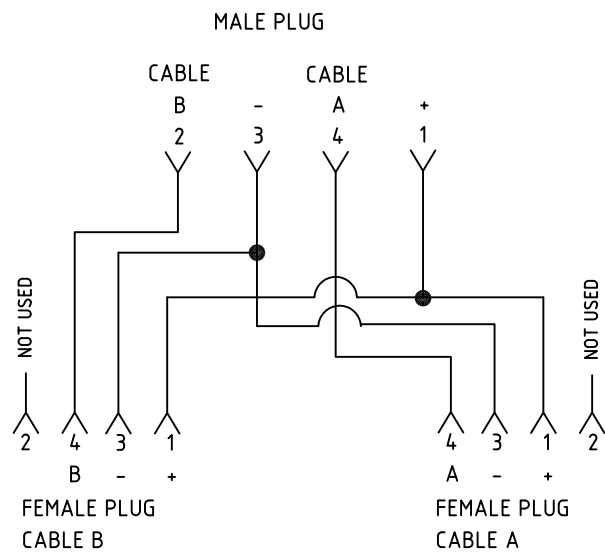


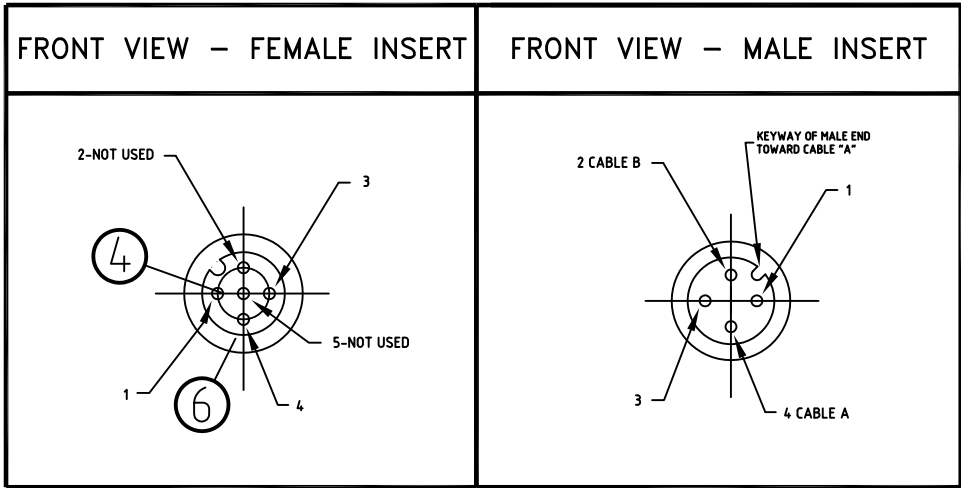


WIRING SCHEMATIC

CONNECTOR SPECIFICATION:

VOLTAGE RATING	300 V
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	FLEXING: -5°C TO +70°C STATIC: -30°C TO +70°C

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE #22-3 (COPPER STRANDING) 4 CONDUCT. 300V	JACKET: TPE	YELLOW

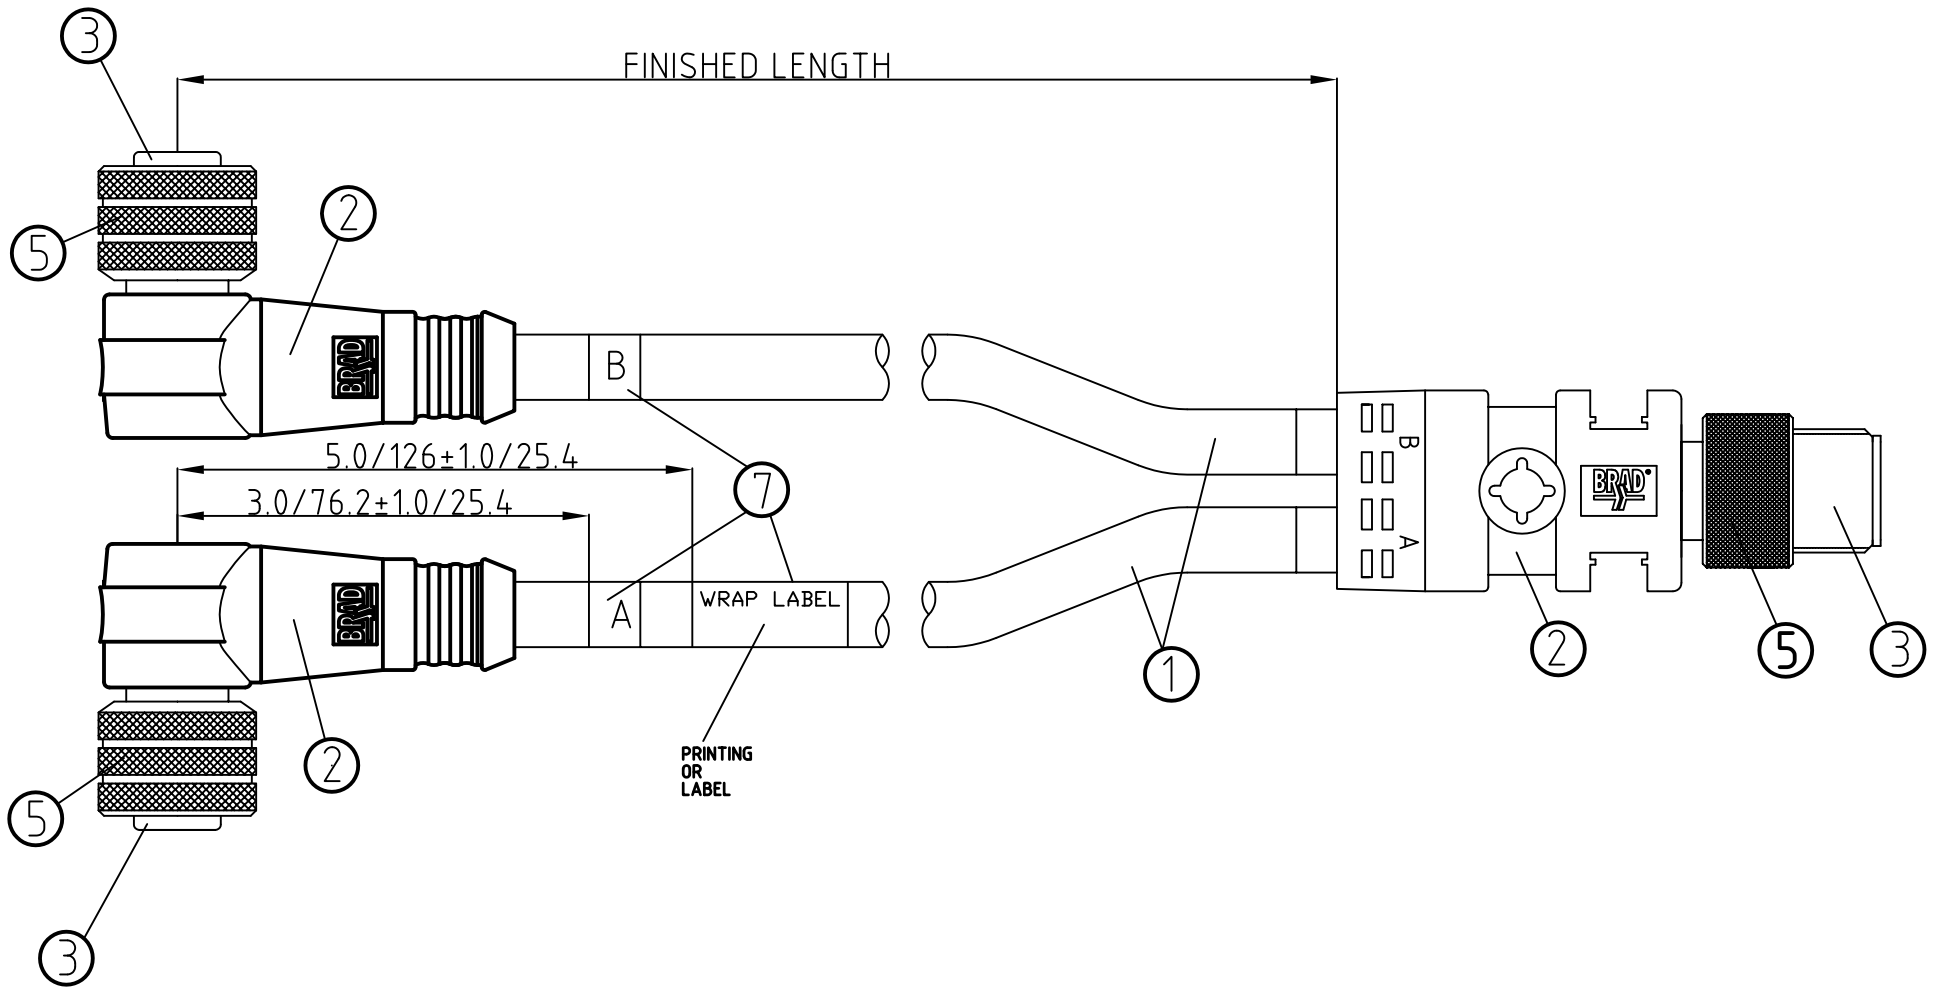

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200680211	884A31K05M003	0.98' +0.75" -0 [0.3M +19.1 -0]

DESCRIPTION EC NO: WEU2010-0362 DRWN: BBRAUCH 2010/02/15 CHKD: NS APPR: NSTAUDIG 2010/02/18	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		mm	INCH	DRAWN BY BBRAUCH	DATE 2010/02/15	MIC INL. SPLITTER XM 3P FE 90(2X) TO 4P M ----			
			4 PLACES	±---	±---	CHECKED BY	DATE				
			3 PLACES	±---	±---	NS	2010/02/16				
			2 PLACES	±---	±0.1	APPROVED BY	DATE	molex	MOLEX INCORPORATED		
			1 PLACE	±0.3	±---	NSTAUDIG	2010/02/18				
		ANGULAR ± --- °			MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120068-027		SHEET NO. 1 OF 1		
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							