


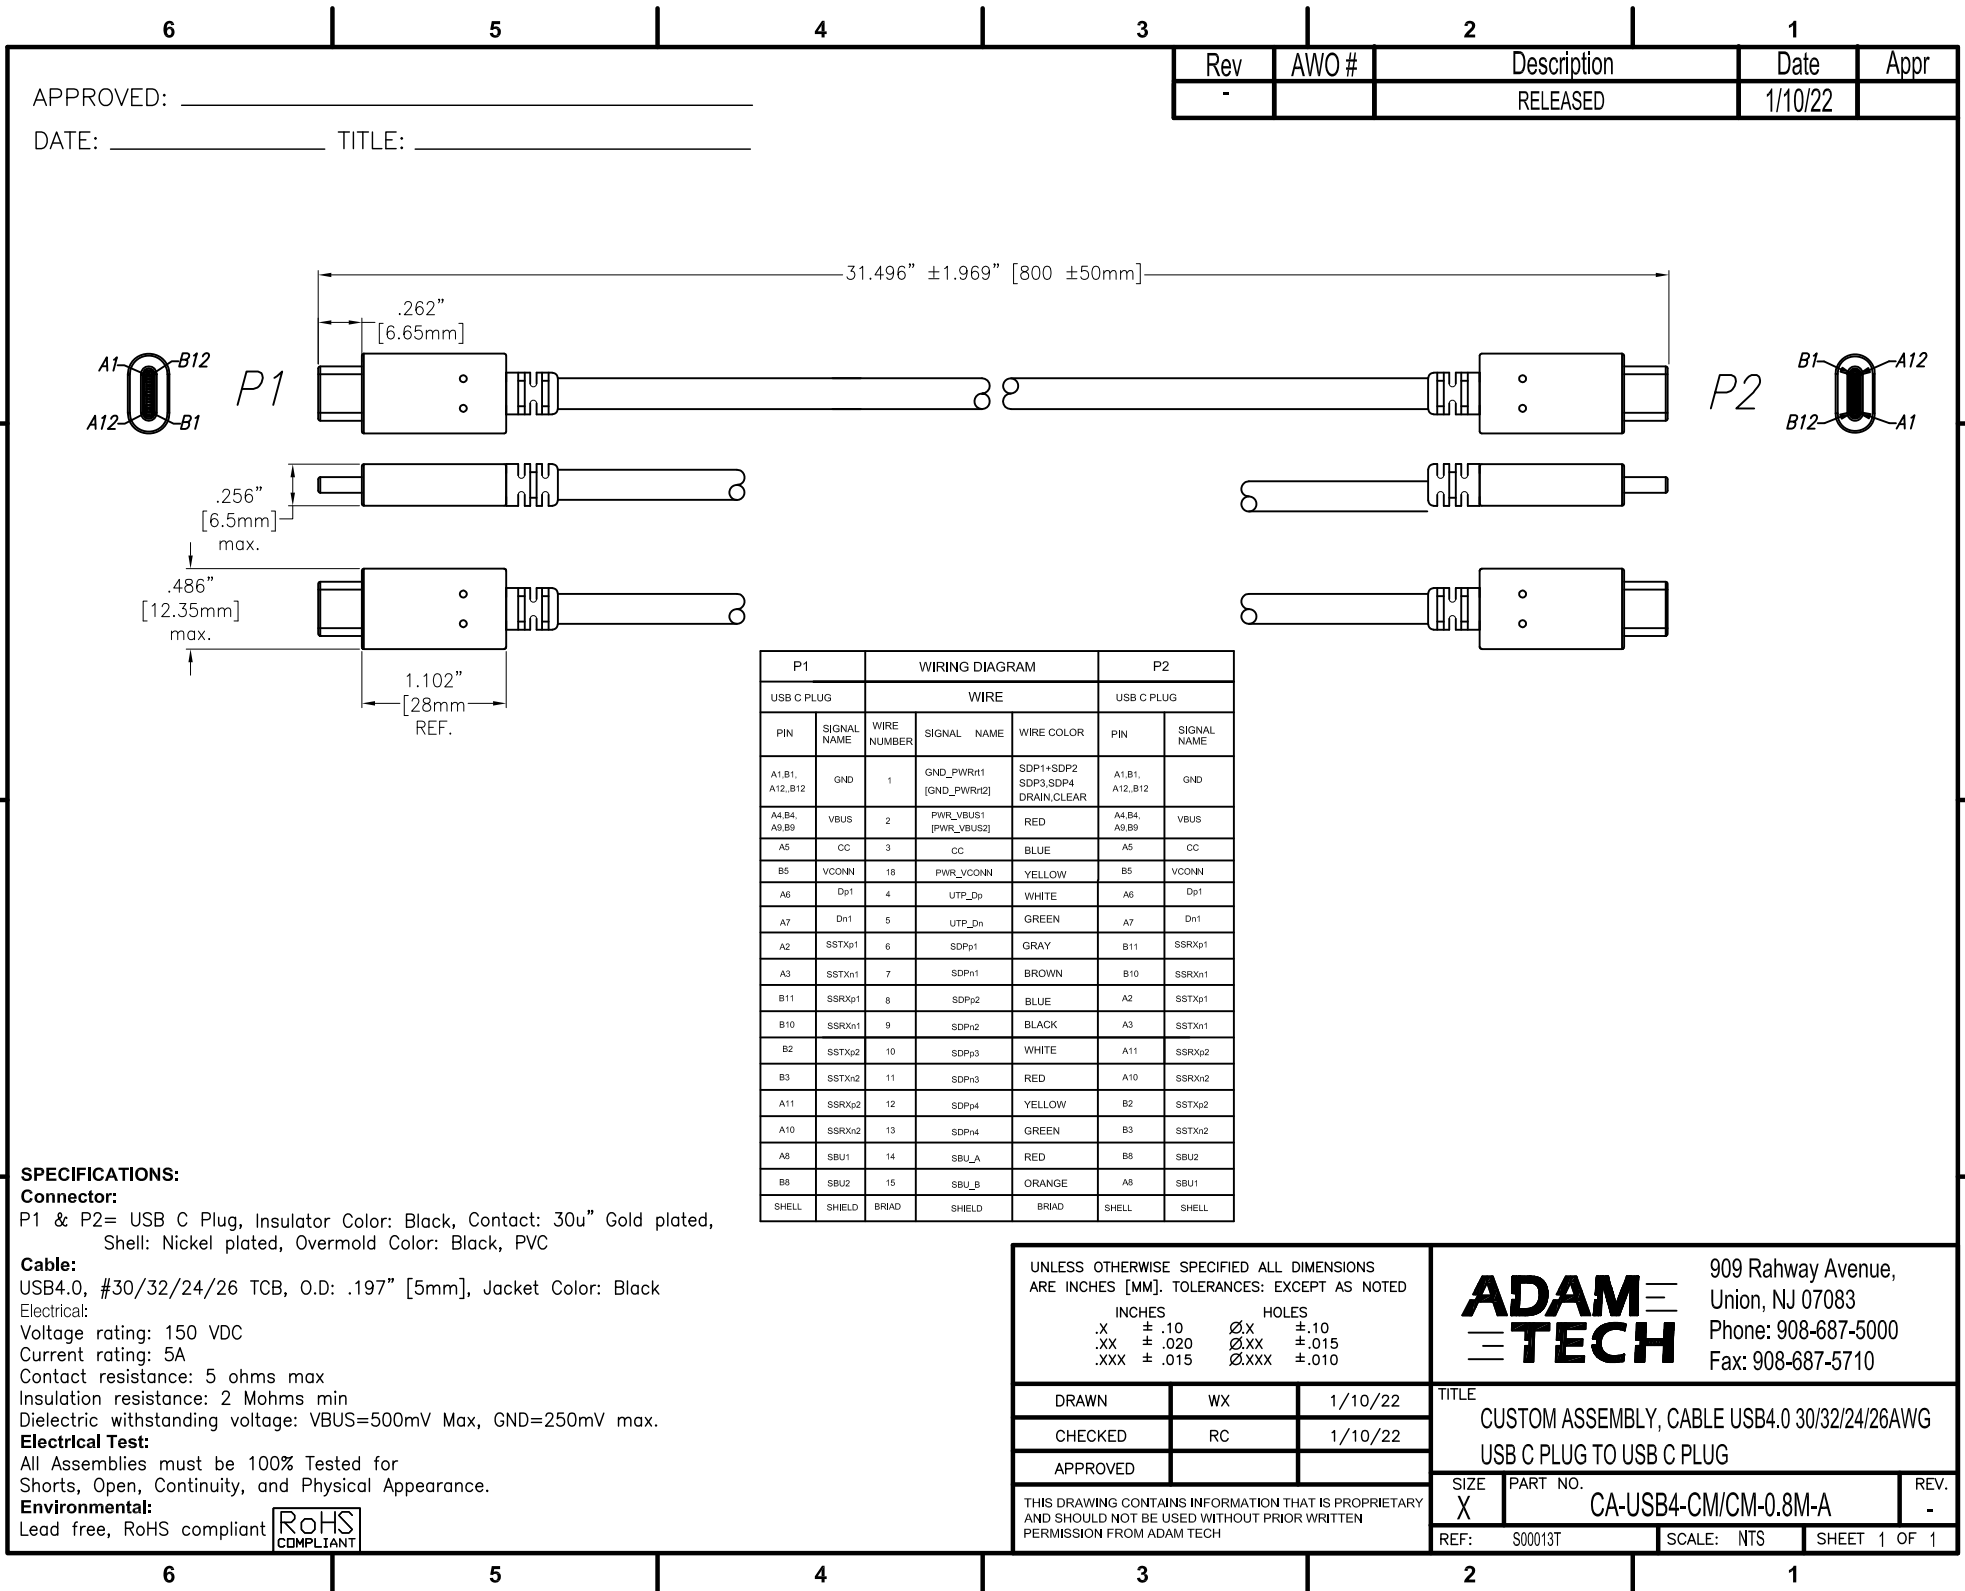

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/22	

SPECIFICATIONS:

Connector:
P1 & P2= USB C Plug, Insulator Color: Black, Contact: 30u" Gold plated,
Shell: Nickel plated, Overmold Color: Black, PVC

Cable:
USB4.0, #30/32/24/26 TCB, O.D: .197" [5mm], Jacket Color: Black
Electrical:
Voltage rating: 150 VDC
Current rating: 5A
Contact resistance: 5 ohms max
Insulation resistance: 2 Mohms min
Dielectric withstanding voltage: VBUS=500mV Max, GND=250mV max.

Electrical Test:
All Assemblies must be 100% Tested for
Shorts, Open, Continuity, and Physical Appearance.

Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

DRAWN	WX	1/10/22
CHECKED	RC	1/10/22
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE	
CUSTOM ASSEMBLY, CABLE USB4.0 30/32/24/26AWG USB C PLUG TO USB C PLUG	
SIZE	PART NO.
X	CA-USB4-CM/CM-0.8M-A
REV.	-
REF:	S00013T
SCALE:	NTS
SHEET	1 OF 1