
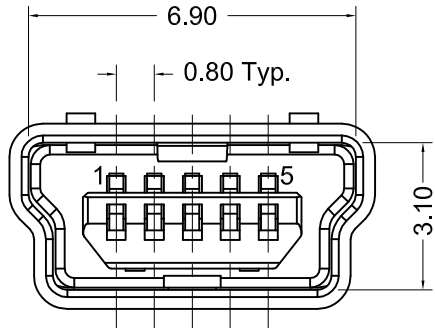
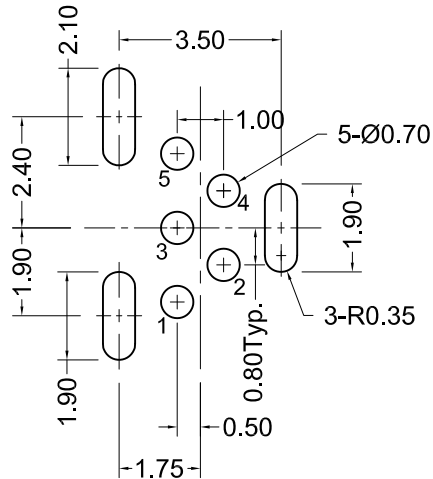
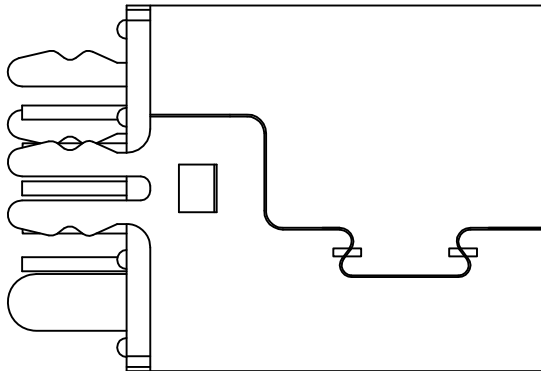
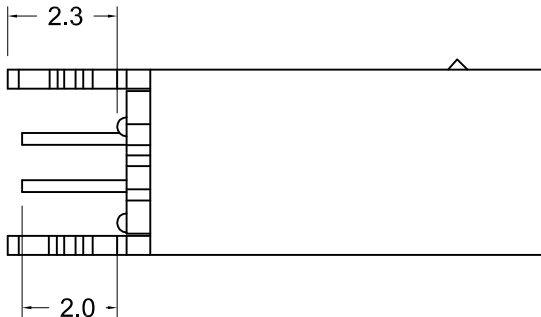
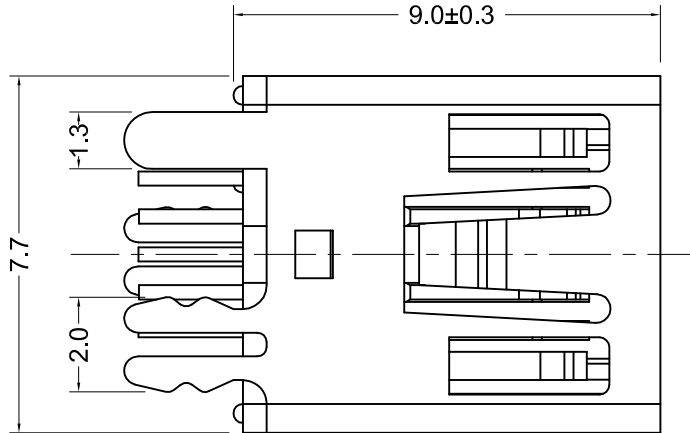


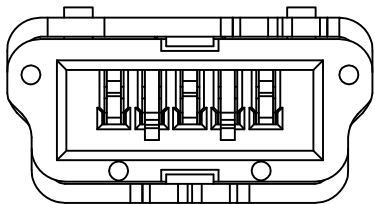

Materials and Finish

Shell: Copper Alloy
Plating: Nickel

Insulator: UL94V-0 Rated
PBT Thermoplastic
Color - Black

Contacts: Copper Alloy
Plating - 30u" Gold
on Contact Area,
3.8um (150u") Tin
on Solder Tail, all over
1.27um (50u") Nickel

Electrical Specifications

Rated Voltage:
30V AC (rms)
Contact Current Rating:
1A Max.
Contact Resistance:
50 milliohms Max.
Insulation Resistance:
1000 Megohms Min.
Dielectric Withstanding:
100V AC
Operating Temperature:
-55°C to +85°C
Durability: 5000 mating cycles

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	1/15/08	Release Drawing	H. MA	N/A	H. MA	9/18/06
A2	03/14/08	ECO #08-021	R. Aguirre	H. MA		
A3	11/18/08	ECO# 08-089	S. Vien	H. MA		
A4	01/16/13	ECO #12-063	S. Vien	P. DalCanto		
A5	05/07/13	ECO #13-019	W. Cook	P. DalCanto		UNITS
A6	07/11/18	Update Address & RoHS	C. Kelleher	C. Furumasu		mm

KMBVX-TH-5S-B30

USB, Mini-B Type Socket, RoHS Compliant

5- Pin, Vertical Mount, Through Hole



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

