



Heyco®-Tite Liquid Tight Cordgrips


Straight-Thru, NPT Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters. Cable ranges listed are for the maximum IP68 sealing range. Contact Heyco for UL approved 514B cable ranges.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.730" (44,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 3-47.
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION		PART DIMENSIONS									
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.	B Max. O.A. Length		C Thread Length		D Wrenching Thk.		E Nut Flat Size		
in.	mm.	in.	mm.						in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
.065 .115	1,7 2,9	.210 .250	5,3 6,4	M4514 M4516	M4515 M4517	RLTCG 1/4 LTCG 1/4		.540	13,7	1.29	32,8	.45	11,4	.21	5,3	.63	16,0
.065 .105	1,7 2,7	.230 .315	5,8 8,0	M3458 M3228	M3459 M3229	RLTCG 3/8 LTCG 3/8		.680	17,3	1.41	35,8	.49	12,4	.21	5,3	.82	20,8
.095 .170	2,4 4,3	.290 .450	7,4 11,4	M4518 M3231	M4519 M3232	RLTCG 1/2 LTCG 1/2		.875	22,2	1.70	43,2	.61	15,5	.21	5,3	.98	24,9
.180 .260	4,6 6,6	.400 .545	10,2 13,8	M4520 M3200	M4521 M3201	RLTCG LL 1/2 LTCG LL 1/2		.875	22,2	1.68	42,7	.44	11,2	.25	6,4	1.06	26,9
.250	6,4	.490	12,4	M3460	M3461	RLTCG 3/4											
.420 .435	10,7 11,0	.630 .705	16,0 17,9	M3234GA M3234	M3235GA M3235	LTCG 3/4		1.040	26,4	2.00	50,8	.62	15,7	.25	6,4	1.30	33,0
.490 .590	12,4 15,0	.785 1.000	19,9 25,4	M8439 M8437	M8440 M8438	RLTCG 1 LTCG 1		1.326	33,7	2.41	61,2	.76	19,3	.30	7,6	1.73	43,9
.787 .875	20,0 22,2	1.020 1.260	25,9 32,0	M4522 M4524	M4523 M4525	RLTCG 1-1/4 LTCG 1-1/4		1.680	42,7	2.69	68,3	.78	19,8	.30	7,6	2.05	52,1
1.000 1.230	25,4 31,2	1.240 1.560	31,5 39,6	M3319 M3317	M3320 M3318	RLTCG 1-1/2 LTCG 1-1/2		1.920	48,8	2.81	71,3	.77	19,6	.36	9,1	2.46	62,5
1.160 1.450	29,5 36,8	1.350 1.730	34,3 43,9	M3323 M3321	M3324 M3322	RLTCG 2 LTCG 2		2.400	60,8	2.93	74,3	.79	20,1	.42	10,7	2.73	69,3

Standard colors black and gray.

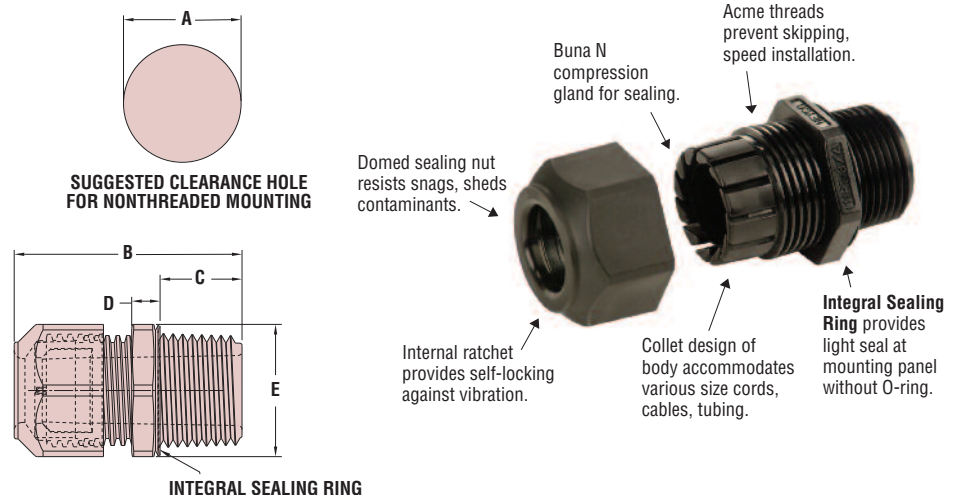

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	- UL Listed under Underwriters' Laboratories File E51579 - Recognized under the Component Program of Underwriters' Laboratories File E51579 - CS Certified By Canadian Standard Association File 93876C
Flammability Rating	Approved for NEMA 4, 4X, 6 and 6P Applications
Temperature Range	94V-2-Consult factory for V0 material
IP Rating	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C) IP 68 (70 PSI, 5 BAR)

*Quick
Specs*