


# EAO – Your Expert Partner for Human Machine Interfaces

84-5130.0040 - Emergency-stop switch complete, foolproof EN IEC 60947-5-5

## 84-5130.0040 - Emergency-stop switch complete, foolproof EN IEC 60947-5-5



*Attention: The preview is based on a sample product. This can differ from your current configuration.*

### Mounting

|                  |           |
|------------------|-----------|
| Mounting cut-out | Ø 22.5 mm |
| Design           | raised    |

### Front

|                 |         |
|-----------------|---------|
| Front dimension | Ø 32 mm |
| Front shape     | round   |

### Other Attributes

|        |          |
|--------|----------|
| Weight | 0.036 kg |
|--------|----------|

### Operating-/Indication part

|               |          |
|---------------|----------|
| Lens material | Plastic  |
| Lens colour   | red      |
| Lens profile  | Mushroom |
| Lens optics   | opaque   |

### IP-Rating

|                  |       |
|------------------|-------|
| Front protection | IP 65 |
|------------------|-------|

### Connection Method

|          |                   |
|----------|-------------------|
| Terminal | Flat ribbon cable |
|----------|-------------------|

### Actuator

|                  |            |
|------------------|------------|
| Switching action | Maintained |
|------------------|------------|

### Switching element

|                   |                             |
|-------------------|-----------------------------|
| Switching voltage | 250 V AC/DC                 |
| Switching current | 5 A                         |
| Switching system  | Slow-make switching element |
| Contacts          | 1 NC + 1 NO                 |
| Contact material  | Gold                        |

### Illumination

|            |  |
|------------|--|
| LED colour |  |
|------------|--|


### Function

|                       |  |
|-----------------------|--|
| Emergency stop switch |  |
|-----------------------|--|

# EAO – Your Expert Partner for Human Machine Interfaces


84-5130.0040 - Emergency-stop switch complete, foolproof EN IEC 60947-5-5

## Dimensions




F1 = Flat ribbon cable


## Mounting cut-outs



## Wiring diagram



## Component layout

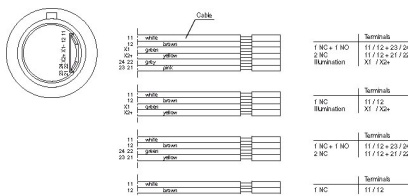

## Additional information

Twist to unlock clockwise

Position indication ring green

Application as per DIN EN ISO 13850 and EN 60204-1

Standard version: Flat ribbon-cable length 300 mm or plug-in terminal 2.8 x 0.5 mm

Other options on request: Customisation of flat ribbon-cable and connectors

## Legend

Contacts: NC = Normally closed, NO = Normally open