
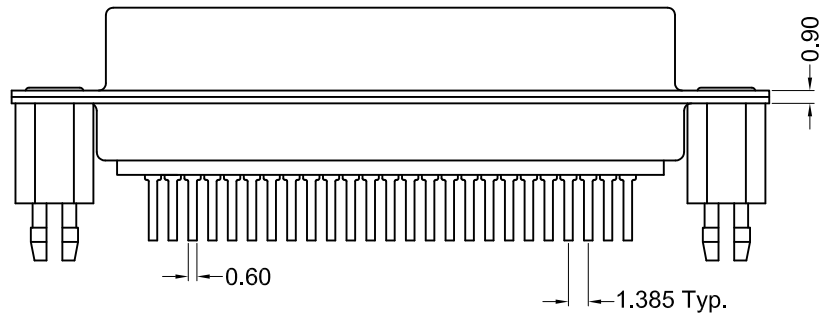
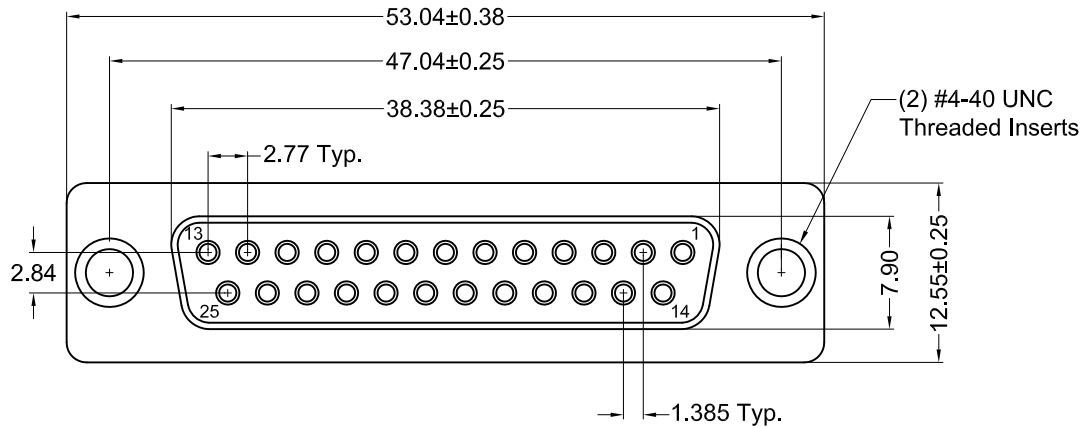


Recommended PCB Layout
(Top View)

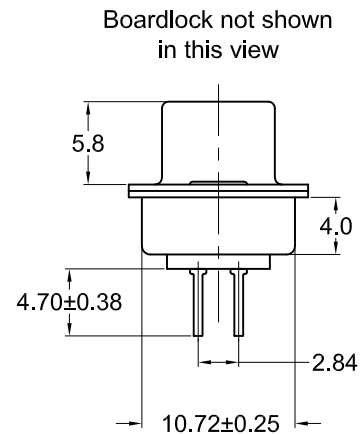

Material and Finish

Shell: Steel, nickel plated
Insulator: PBT thermoplastic with glass-fiber reinforcement, UL94V-0 rated
Color: Black

Contact Material:
Socket - Brass

Contact Plating Options:
Standard: gold flash on mating end, tin on termination end, nickel underplate on entire contact
15 Option: 15u" gold on mating end, tin on termination end, nickel underplate on entire contact
30 Option: 30u" gold on mating end, tin on termination end, nickel underplate on entire contact

Electrical Specifications

Rated Current: 2A
Rated Voltage: 30V RMS
Insulation Resistance: more than 1000 megohms at 500V DC
Contact Resistance: 13 milliohms max.
Dielectric Withstanding Voltage: 1000V for 1 minute
Operating Temperature: -55°C to $+105^{\circ}\text{C}$

Part Number	Contact Area Plating Finish
K85X-BD-25S-BR	Gold Flash (standard)
K85X-BD-25S-BR15	15u" Gold (15 option)
K85X-BD-25S-BR30	30u" Gold (30 option)



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	03/18/09	New Drawing	S. Vien	H. MA	S. Vien	02/26/09
A2	12/31/17	ECO #17-030	J. Elbanna	C. Furumasu		

K85X-BD-25S-BR

D-Sub, HD, Vertical, RoHS Compliant
25 Pin, Female, Threaded BoardLocks

