


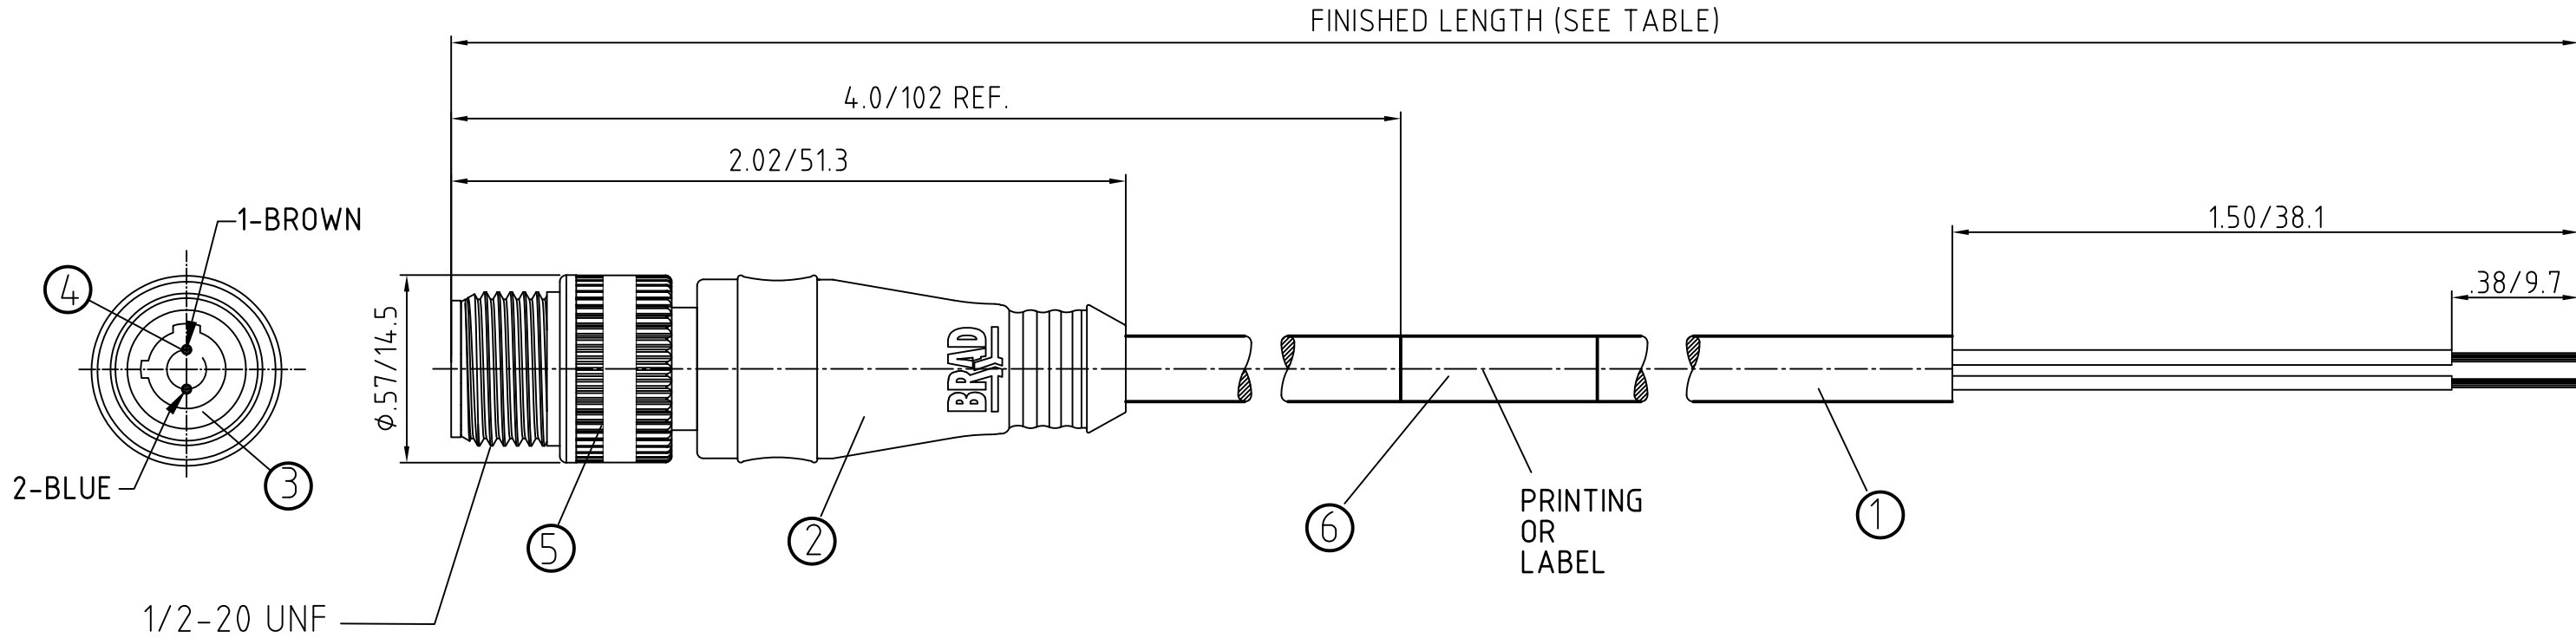


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
2	1200720108	702006D02F060	6.00' +3.50" -0 [1.8M +88.9 -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 22 AWG (26x#36 COPPER STRANDING) 2 CONDUCTOR BRAID SHIELD 300V	PVC	YELLOW

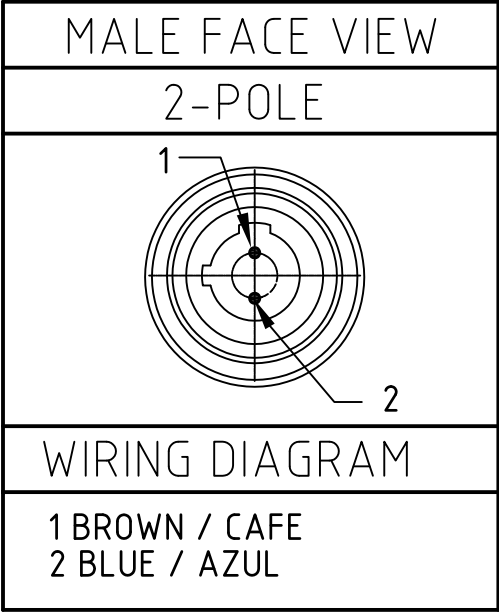

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 08.03.10 2010/03/10	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/08	MICRO-CHANGE CORDSET 2-P DUAL KEYWAY MA STR BRAID SHIELD PVC CABLE			
		4 PLACES	±---	±---	CHECKED BY	DATE				
		3 PLACES	±---	±---	FP	2010/03/09				
		2 PLACES	±---	±.01	APPROVED BY	DATE				
		1 PLACE	±0.3	±---	FPACHER	2010/03/09				
		ANGULAR ± --- °			MATERIAL NO. 1200720108		DOCUMENT NO. SD-120072-014			SHEET NO. 1 OF 1
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					