
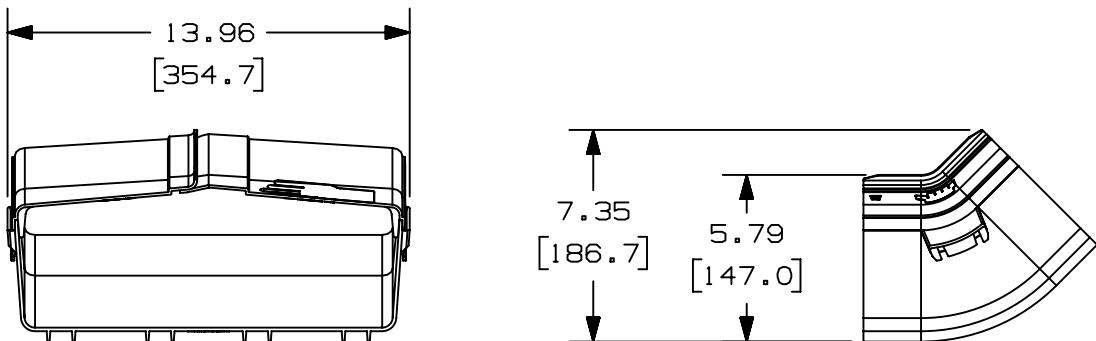



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

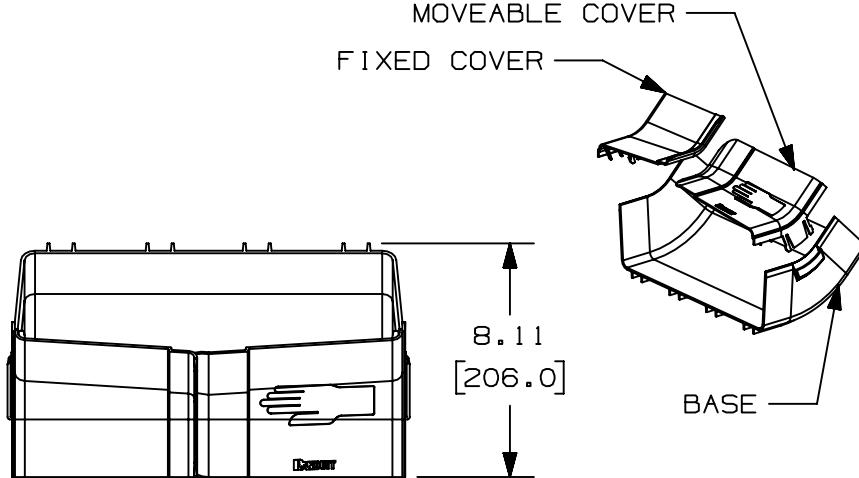

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
2. THE FIBERRUNNER 12x4 INSIDE VERTICAL 45° ANGLE FITTING IS DESIGNED WITH A MINIMUM 2" (50.8) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
3. PARTS SUPPLIED:
 - (1) - INSIDE VERTICAL 45° ANGLE BASE
 - (1) - FIXED COVER SECTION,
 - (1) - MOVEABLE COVER SECTION
4. DIMENSIONS IN PARENTHESES ARE IN METRIC.

PANDUIT PART NUMBER	WEIGHT	MATERIAL
FRIV4512X4**	1.39 LB/EACH (631g/EACH)	ABS
FRIV4512X4L**	1.39 LB/EACH (631g/EACH)	PC/ABS

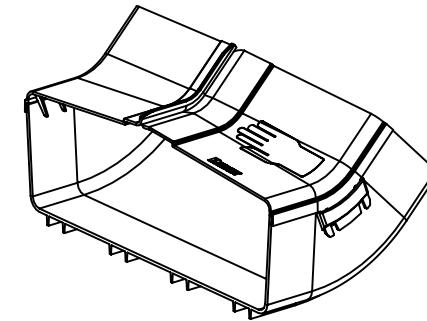

01B	8/21/20	MEX-JAGC	DWR	DWR	ADDED PART NUMBER	V09002DZ/11
-----	---------	----------	-----	-----	-------------------	-------------

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY		DATE	CHK	SCALE	DRAWING NUMBER
							JHNU	1-3-01				SHT 1 OF 1
												SIZE A