

Type BLR-I-506

Fuse Block - Indicating

6 Pole – Regular Auto Blade



www.optifuse.com

(619) 593-5050

Specifications:

Voltage: 32 VDC

Max Current Rating: 30A per Circuit - 100A Max Input

Fuse Type: Regular Auto Blade – APR / ANR

Base: PBT (UL flame: 94V-0), Black

Cover: PC (UL flame: 94V-2), Transparent





Push Button: POM (White)

Terminals: Copper, Tin plated

Indicating LED – Red

Temperature Rating: -20° C ~ +85° C

Mechanical Dimensions: Inches [mm]

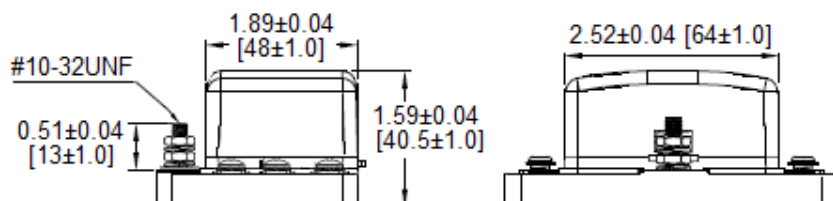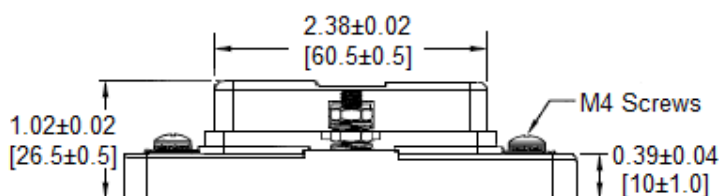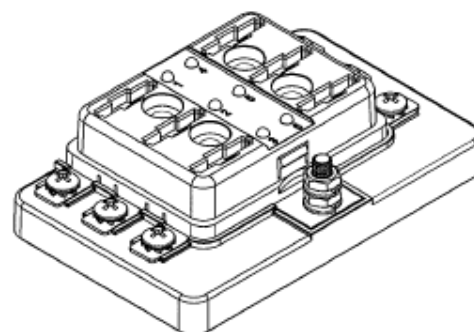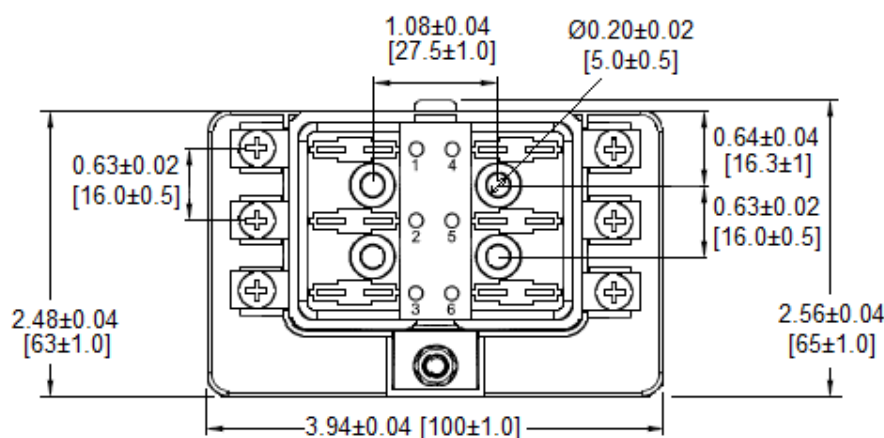

Connection Pad Option Available

Input wire size: #4-6 AWG

Output wire size: #12-16 AWG

Mounting Holes	Terminal Dimensions
1.08±0.04 [27.5±1.0] 0.63±0.04 [16±1]	M4 Screws

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev B 04/2017 - Page: 1/1
Code S02-01H