

Type PMA-DS-08-Q2S

Panel Mount Fuse Holder

1/4" x 1 1/4" (6.3 x 32mm) Fuses

Driver / Screw



www.optifuse.com

(619) 593-5050

Electrical Rating: 10A 250VAC / 12VDC

Fuse Style: 1/4" x 1 1/4" (6.3 x 32mm)

Material:

Frame: Polycarbonate (UL flame: 94V-2)

Cap: PBT (UL flame: 94V-0)


Terminals: Nickel-plated brass

Cap: Slotted Driver type, Screw type – Rated to IP-56

Mounting: by nut

Terminal: Solder/Quick-Connect 6.4mm / 0.250"

Product Dimensions: Inches [mm]

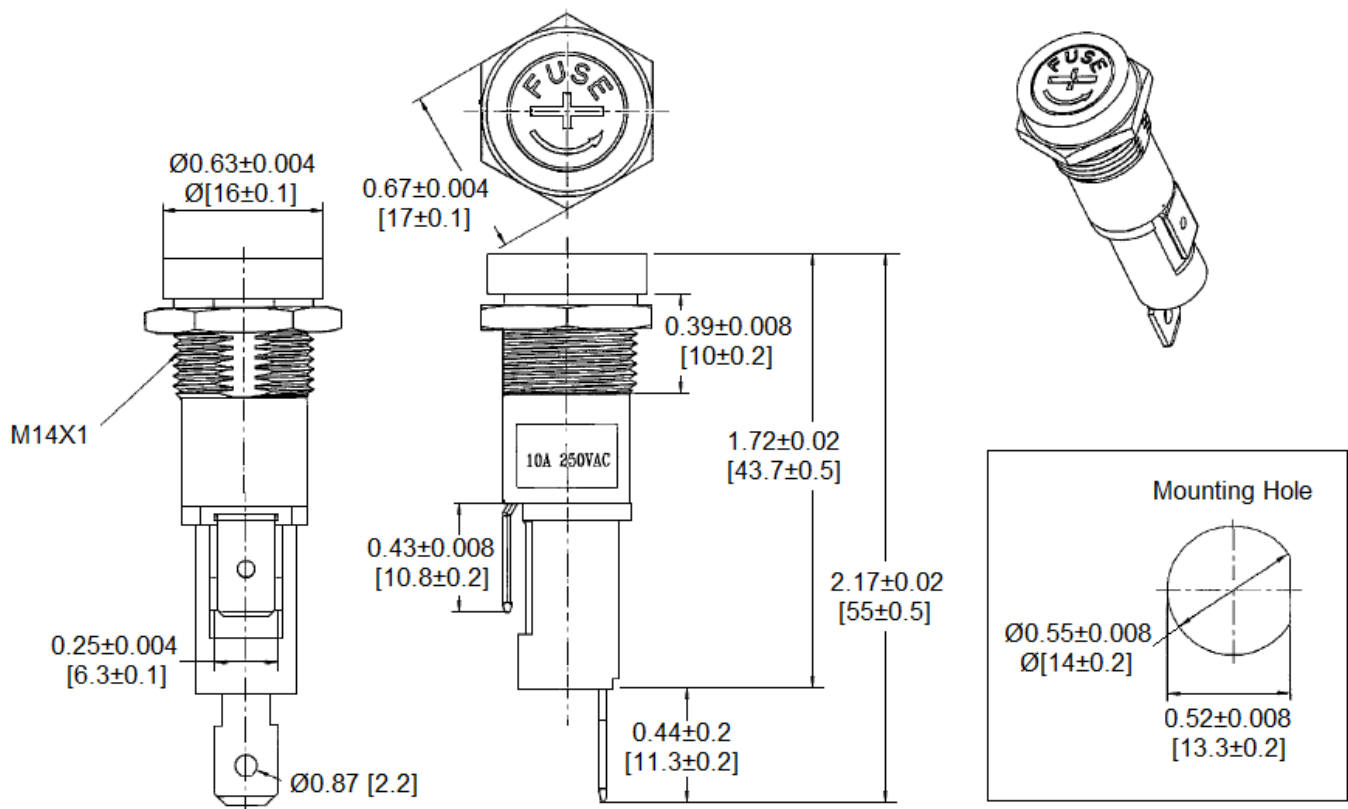

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse.
- Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 02/2012 - Page: 1/1
Code S02-01H