

Type LPR-08

“Add-On” Automotive Fuse Holder



Regular Automotive Blade Type Fuse



Rating: 32VDC
Max Combined Current - Both Circuits - 30A
Max Primary Circuit - 25A
Max Auxiliary Circuit - 15A

Body Material: PVC
For use with Type APR Fuse (Regular Automotive Blade Type)
Wire: 16 AWG Red Wire
Connector: Butt-Splice Connector

Mechanical Dimensions: Inches [mm]

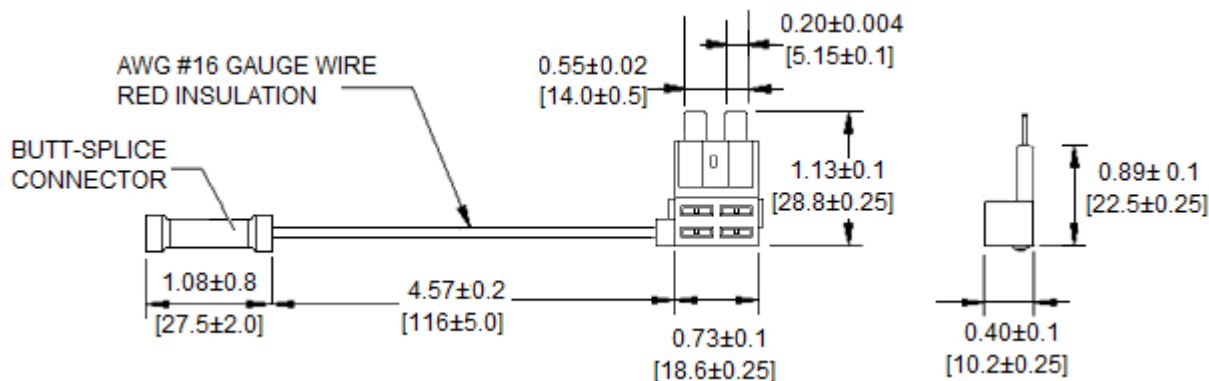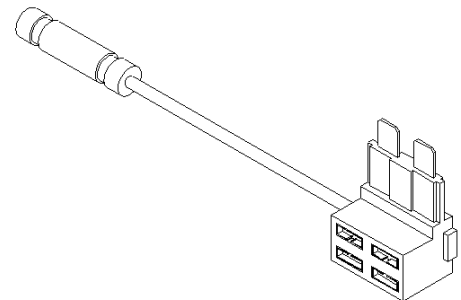

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.