

PART NO.	A 28200-015	REV	ECO	DATE	APP
		G	98056	11-10-11	TLM

ALUMINUM 6061-T6, NICKEL
PLATE PER AMS-C-26074.

LIQUID CRYSTAL POLYMER (LCP)
PER ASTM D5138.



BERYLLIUM COPPER PER ASTM
B194, C17200, GOLD PLATED
PER ASTM B488, (HARD GOLD)
TYPE II CODE C, CLASS 1.27.

SOLDER COATED WITH SN63A PER
J-STD-006 OR AMS-P-81728.



1 AMP MAX PER MIL-DTL-32139.

71 MILLIOHM MAX (71mV DROP
MAX) @ 1.0 AMPS PER MIL-DTL-
32139.

PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VIII OF MIL-DTL-32139.

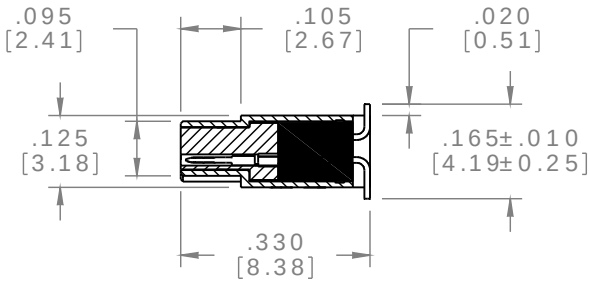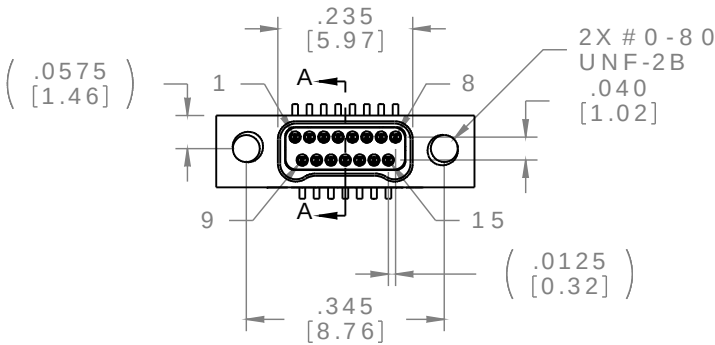

SECTION A-A

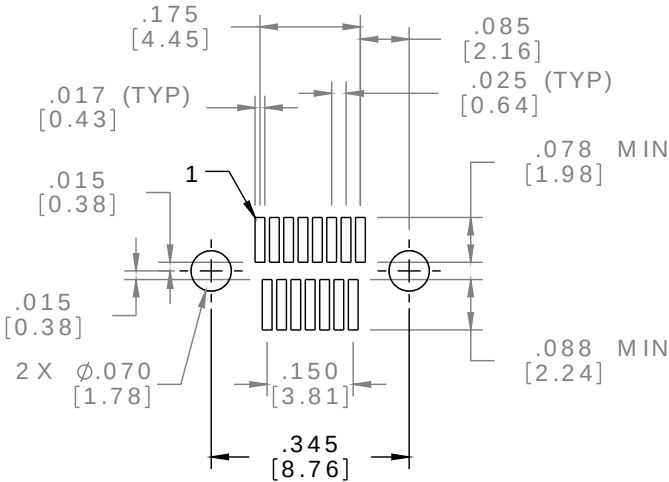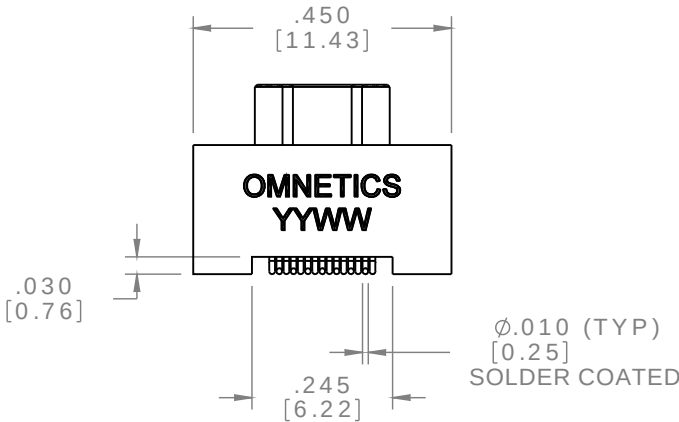

SUGGESTED PAD LAYOUT



ACTUAL SIZE

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

MNP O S L D W	THIRD ANGLE 	THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OR DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP.				CAGE CODE 61873		
	-TOLERANCES-	DFTM. AAS DATE 05-05-04 TITLE: (15) PIN MALE Bi-Lobe® CONNECTOR APP'D. -				DWG NO.	A 28200-015	
	UNLESS OTHERWISE NOTED					SHEET 1 OF 1		REV
	DIMENSIONS IN INCHES					SCALE: 3:1		G
	2 PL DEC ± .01 3 PL DEC ± .005 4 PL DEC ± .0005 ANGLES ± 1°							