


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/07/14	H	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
02/17/17	J	ADDED STRAIN RELIEF I.D.	T.B.	B.S.	
12/15/17	K	DIM. 80.40 WAS 79.60	T.B.	B.S.	
03/06/19	L	DIM. 24.20 WAS 24.60	T.B.	B.S.	
10/07/19	M	ADDED RING MATERIAL	T.B.	B.S.	

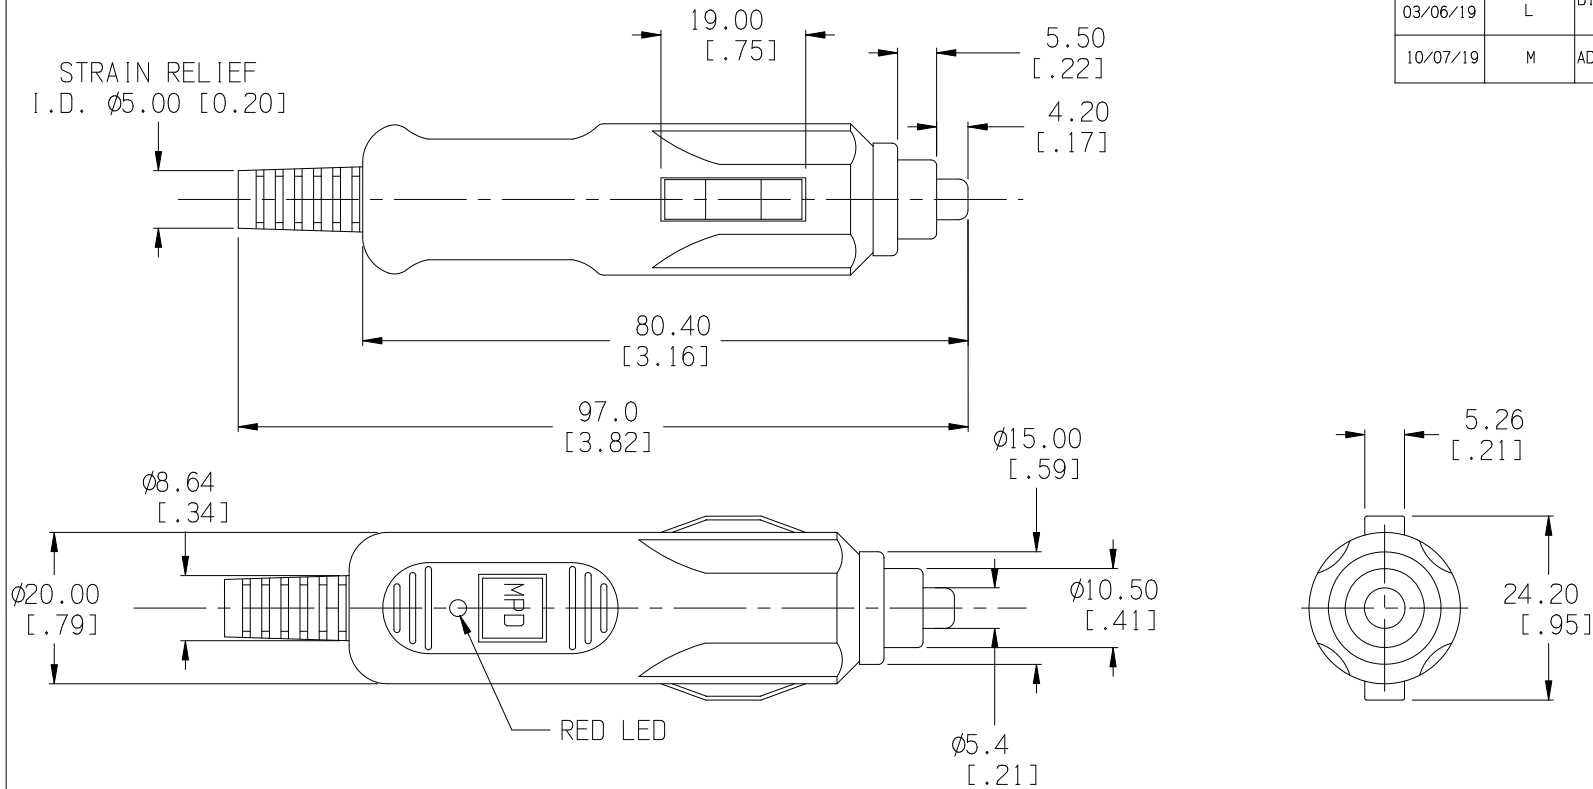

SPECIFICATION:

BODY: PBT (V0) + GF, UL FILE #E130155

COLOR: BLACK

CENTER CONTACT: BRASS, NICKEL PLATED

NEG. TERMINAL: SK5, GOLD PLATED

POS. TERMINAL: P.B., GOLD PLATED

RING: BRASS, NICKEL PLATED

SPRING: $\phi 0.8$ P.B. WIRE, GOLD PLATED

WIRE STRAIN RELIEF: PVC

LED: RED, $\phi 3$ mm, 2.2K Ohm, 1/4 W

FUSE: 20AMP., 6.35mm x 30mm (1/4" X 1 1/4")

RATED AT 18 HOURS, CONTINUOUS DUTY

20 AMP'S MAX

ROHS COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal $\pm .5$ (.020)	Scale		Drawn By B.S.
Fractional $\pm .8$ (.030)	Title 20 AMP CIGARETTE PLUG FOR 21 OR 22.2mm DIA. SOCKETS WITH RED LED		Approved By T.B.
Angular $\pm 3^\circ$	Date 10/07/19	Drawing Number APP-001-20AMP	