


DESCRIPTION: FEMALE - DIP SOLDER / MACHINED - ECONOMY

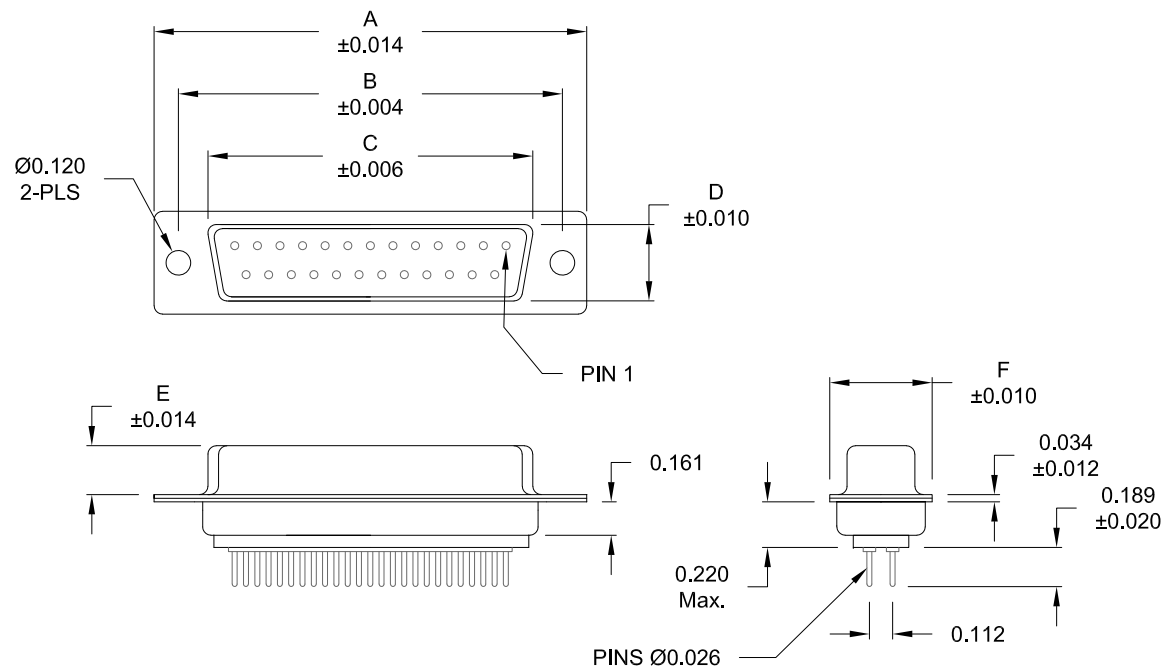

MATERIAL:

SHELL: STEEL, NICKEL PLATED
INSULATOR: UL 94V-O RATED, WHITE, PA6T
PROCESS TEMP.: 260° PROCESS TEMPERATURE
CONTACT: BRASS
SEALING MATERIAL: F04 FLEXIBLE ADHESIVE

MEETS IP67 STANDARDS
(SEE PAGE 3 FOR SEALING DETAILS)

ELECTRICAL:

CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: 15 mOhms Max.
INSULATION RESISTANCE: 1,000 MOhms min.
WORKING VOLTAGE: 250VAC
TEMPERATURE: -55° C TO 125° C

RoHS COMPLIANT

No. OF PINS	DIMENSIONS ^(inch) _(mm)					
	A	B	C	D	E	F
9	1.213	0.984	0.642	0.311	0.236	0.496
	30.80	24.99	16.30	7.90	5.99	12.60
15	1.541	1.312	0.970	0.311	0.236	0.496
	39.15	33.32	24.65	7.90	5.99	12.60
25	2.087	1.852	1.512	0.311	0.236	0.496
	53.00	47.04	38.40	7.90	5.99	12.60




772-EYY-2 1 3 R YY 1

SERIES
POSITIONS
E09
E15
E25
GENDER
2 = FEMALE
TERMINATION
1 = DIP SOLDER
SHELL PLATING
3 = NICKEL
RoHS COMPLIANT
HARDWARE OPTIONS
00 = NO HARDWARE
01 = .065" CLINCH NUT (BOARD SIDE)
05 = .237" 4-40 BOARD LOCK
PLATING OPTIONS
1 = GOLD FLASH
2 = 30u" GOLD
3 = 50u" GOLD

UNITS = inch

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 9-4-08		
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: NTS		SHEET 1 OF 3		REV 9
		DWG NO. 772-EYY-213RYY1				

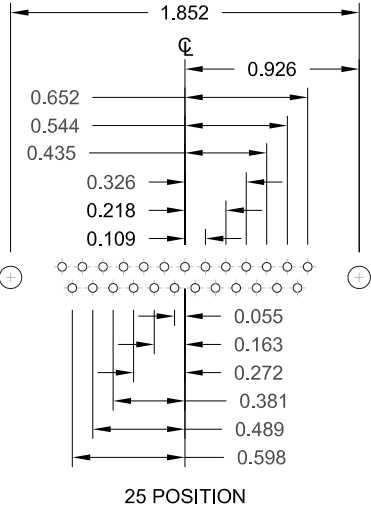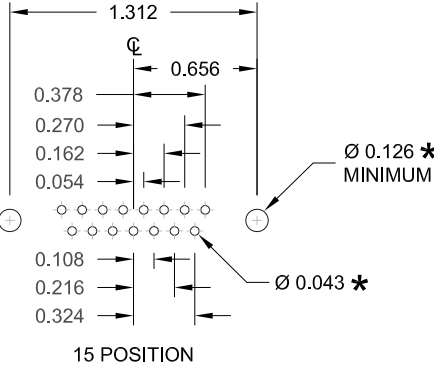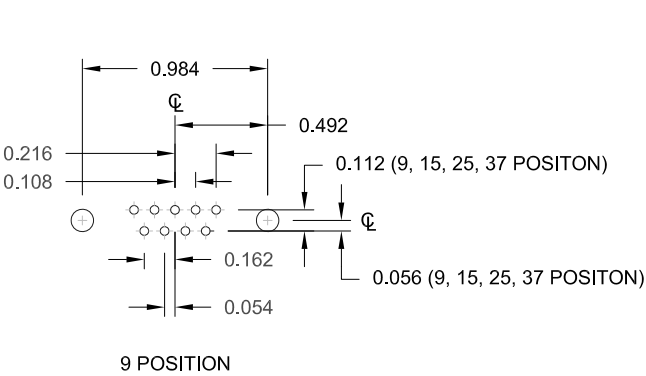


UNITS = inch

* TYP.
SUGGESTED SIZE
MAY NOT BE SUITABLE FOR ALL APPLICATIONS

DO NOT SCALE FROM DRAWING


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 9-4-08	
NorComp		SCALE: NTS	SHEET 2 OF 3		REV 9
		DWG NO. 772-EYY-213RYY1			

DESCRIPTION: IP67 - FEMALE - DIP SOLDER - MACHINED - ECONOMY - SEALING PROCESS

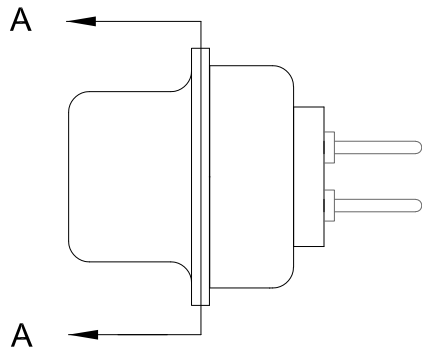

FRONT SEAL APPLIED BETWEEN
FRONT INSULATOR AND
FRONT METAL SHELL

MIDDLE SEAL APPLIED BETWEEN
FRONT INSULATOR AND
BACK INSULATOR

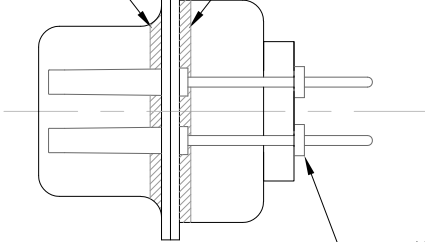


****NOTE****
SEALING MATERIAL
SHALL NOT PROTRUDE
PAST THE CONTACT
SHOULDER


DETAIL A-A

HARDWARE OPTIONS

01X 0.065" (BOARD SIDE)

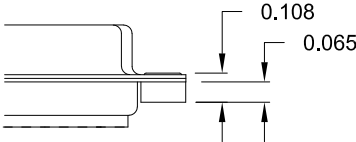

05X 0.237" (BOARD SIDE)

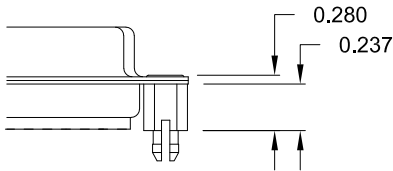

UNITS = inch

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
PAM JENKINS

DATE:
9-4-08

NorComp

SCALE: NTS	SHEET 3	OF 3	REV 9
DWG NO. 772-EYY-213RYY1			