


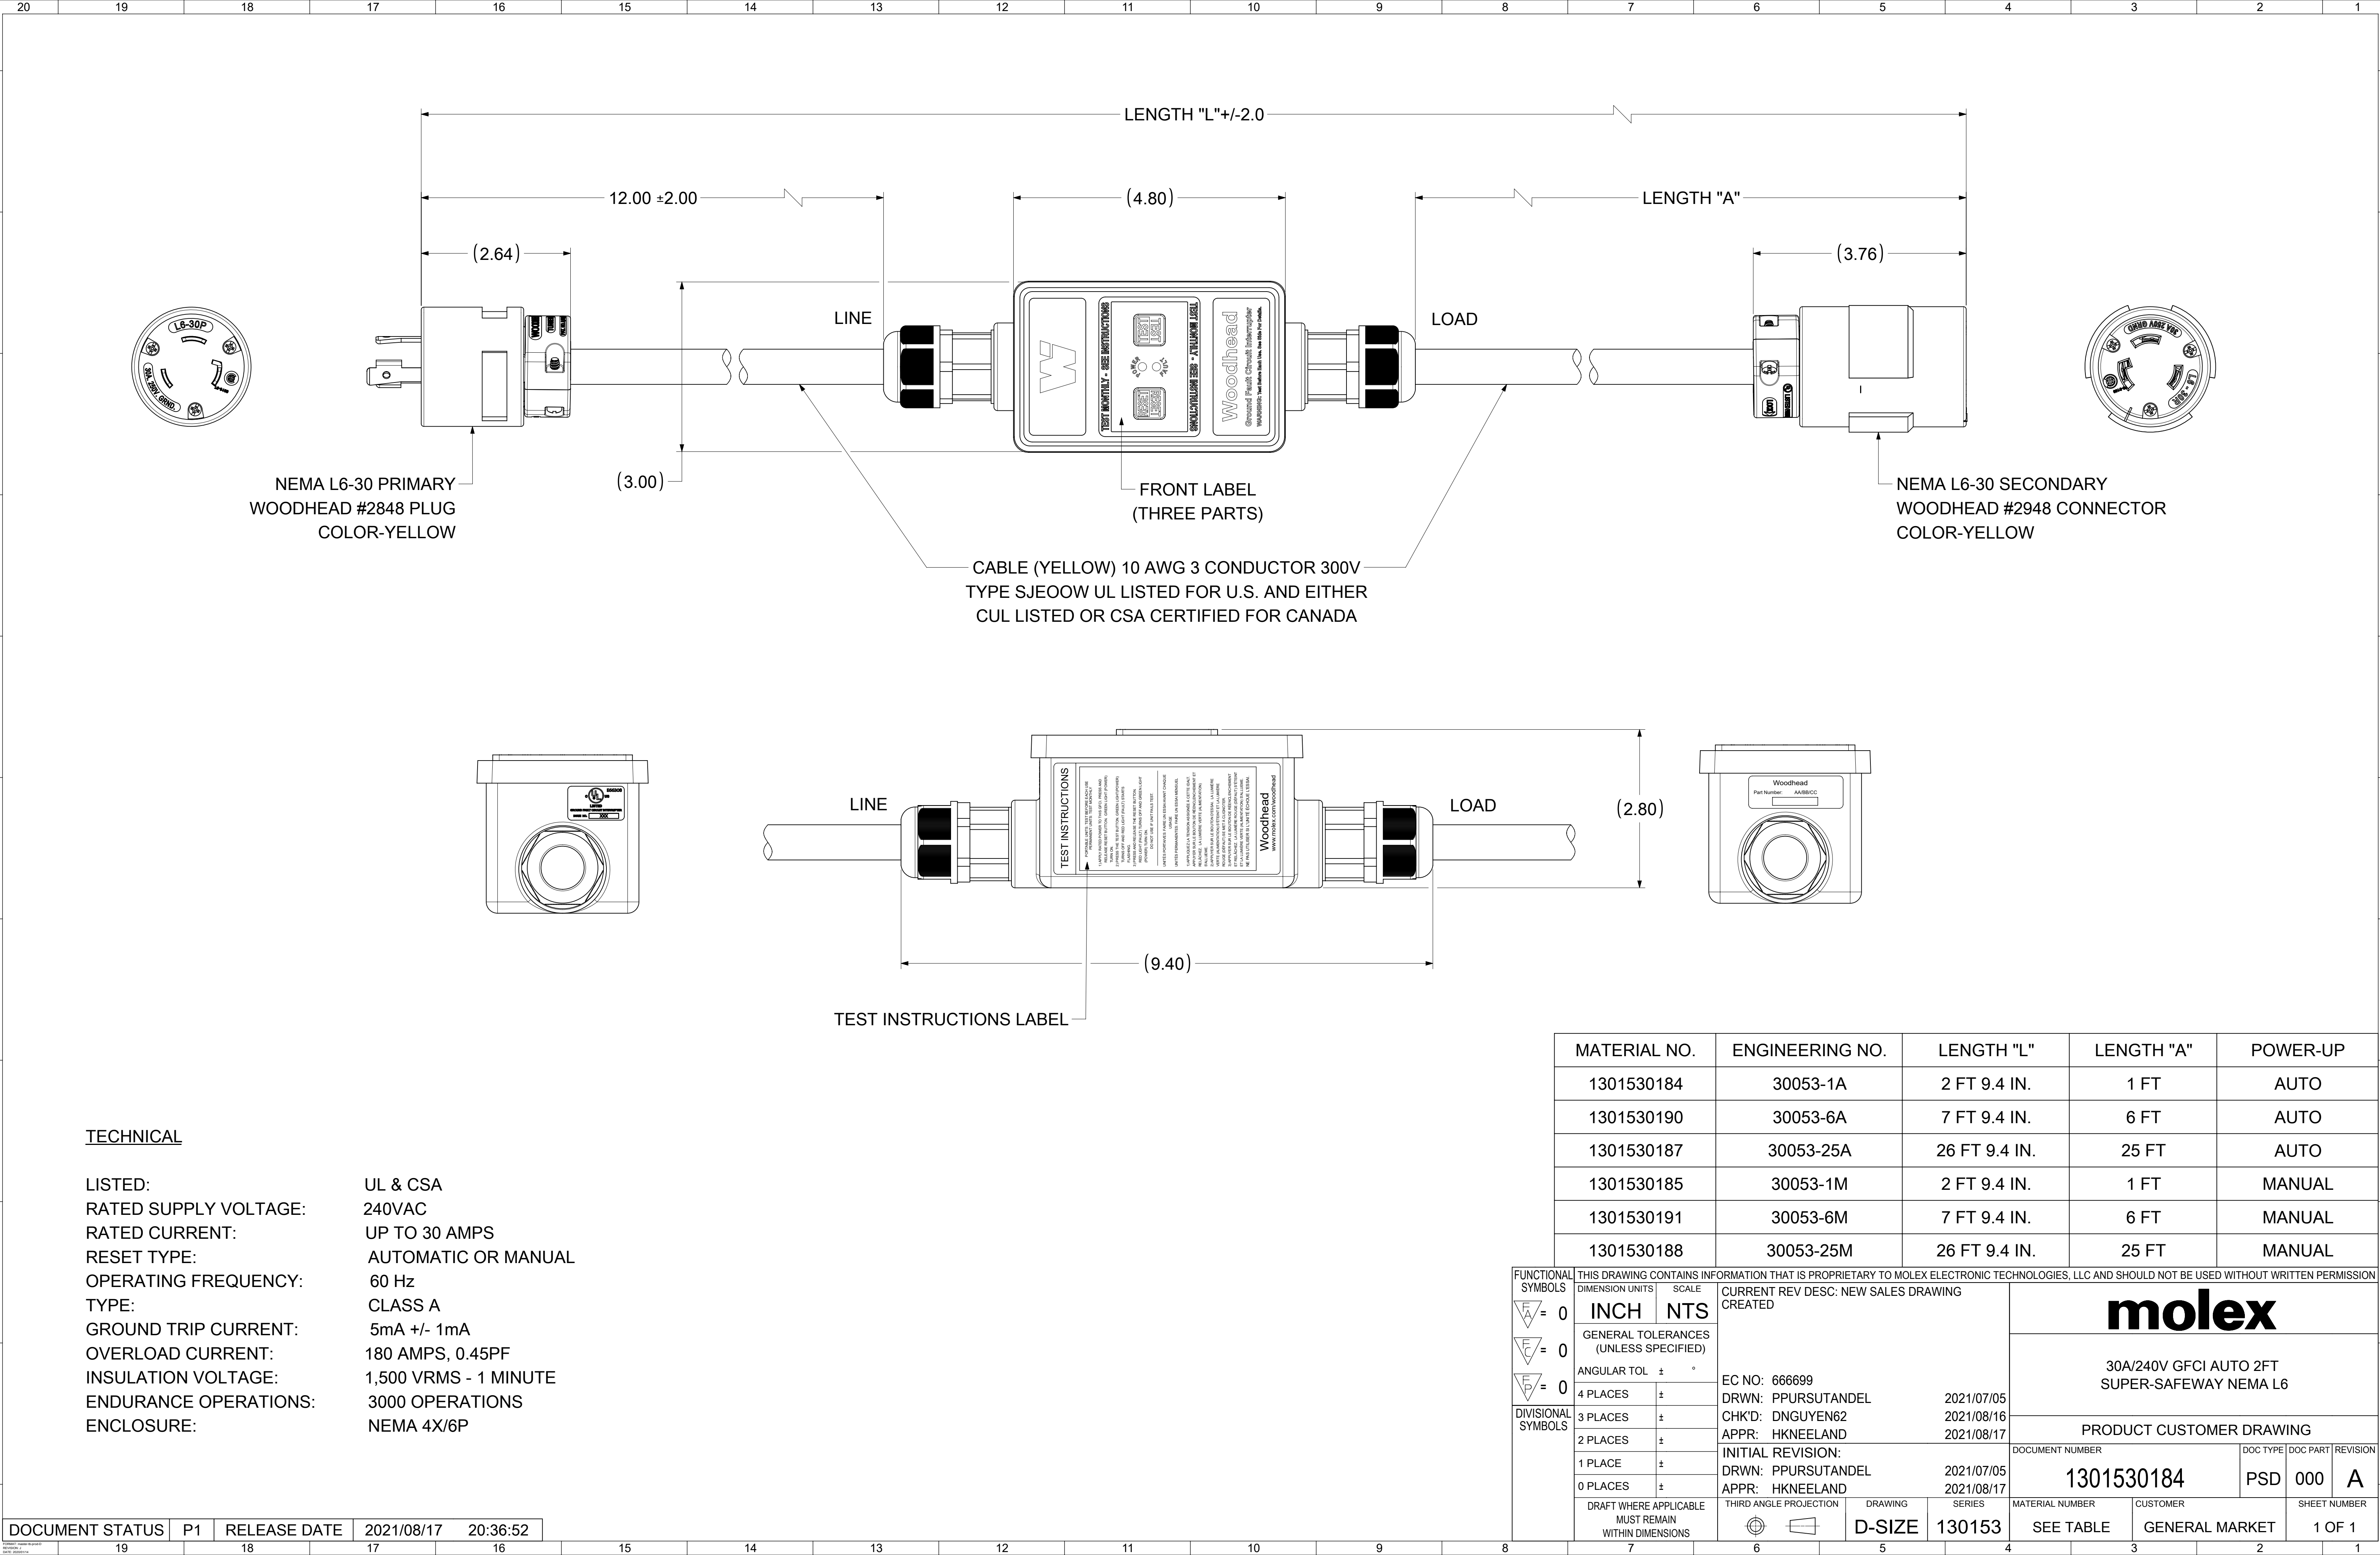

TECHNICAL

LISTED: UL & CSA
RATED SUPPLY VOLTAGE: 240VAC
RATED CURRENT: UP TO 30 AMPS
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 180 AMPS, 0.45PF
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: NEMA 4X/6P

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530184	30053-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530190	30053-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530187	30053-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530185	30053-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530191	30053-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530188	30053-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED			molex 30A/240V GFCI AUTO 2FT SUPER-SAFEWAY NEMA L6		
F_A = 0	INCH	NTS								
F_C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 666699 DRWN: PPURSUTANDEL 2021/07/05 CHK'D: DNGUYEN62 2021/08/16 APPR: HKNEELAND 2021/08/17 INITIAL REVISION: DRWN: PPURSUTANDEL 2021/07/05 APPR: HKNEELAND 2021/08/17			PRODUCT CUSTOMER DRAWING				
F_P = 0	ANGULAR TOL ± °									
DIVISIONAL SYMBOLS	4 PLACES	±								
	3 PLACES	±								
	2 PLACES	±								
	1 PLACE	±								
0 PLACES	±	DOCUMENT NUMBER			DOC TYPE		DOC PART	REVISION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
				D-SIZE	130153	SEE TABLE		GENERAL MARKET	1 OF 1	