


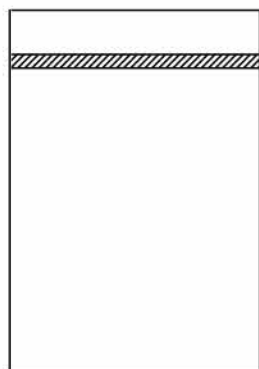
P1: M-053A

P2: M-052A

Customer No.:

No.:

P1

PACKING:
1PC IN A POLYBAG

CABLE MARKING:

(UL) SPT-2 2/C 18AWG(0.824mm²) VW-1 105°C 300V E204978 CSASPT-2 2/C 0.824mm²(18AWG) FT2 105°C 300V 204790 MSL

P1

L

N

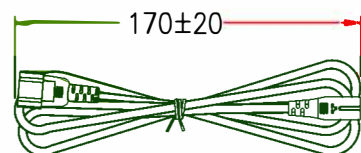
P2

L

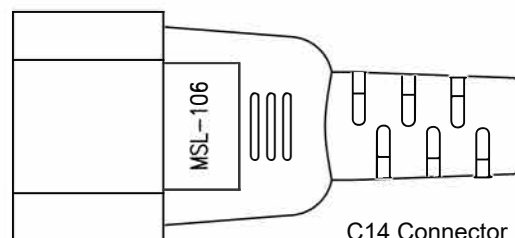
N

齒狀邊

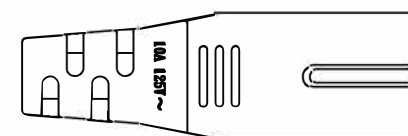

PACKING:



IEC 320 C14(MSL-106)

C14 Connector
10amp 125V

IEC 320 C7(MSL-103)

C7 Connector
10amp 125V

P2

NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS CONCAVE LETTERING MOULD

3	UL SPT-2 18AWG x 2C, OD 3.5*6.9mm, JACKET BLACK, DRAWING No. EPSPT001802C-050	H5TA04-0304K09	L-30mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	2.35 BRACKET: YS-031, COLOR BLACK	A1QC03-0767K09	1	M767
	2.35 TERMINAL: 98714PS-0	A1QB05-0257	2	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-014, COLOR BLACK	A1QC10-0767K09	1	M767
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED



CHECKED

HU

1/20/2022

DRAWING

XIAO

1/20/2022



DRAWN NAME

POWER SUPPLY CORDS & CORDS SETS

PRODUCT NO.

PWCD-C7C14-10A-XXF-BLK

Cable Length
Unless Other Spec.
Tolerances:
0 ~200mm ±10mm
201~1000mm ±20mm
1001 ~1500mm ±25mm
1501~2100mm ±30mm
2100mm± ±40mm

UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm