

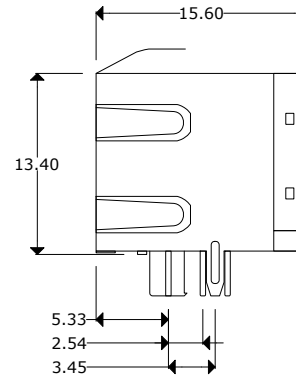
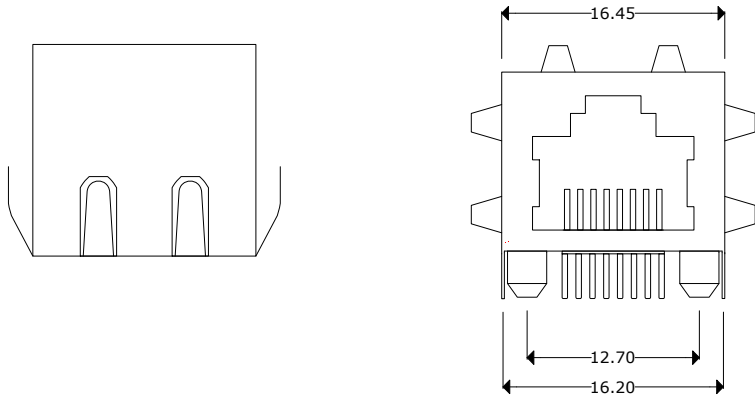


SCNRJ-88GGNSEN-483ESORTH

SUNTSU	RJ45	CONTACTS 8 : 8	MAGENETIC N : None	EMI Finger E : With	OPERATING TEMP 48 : -40~85°C	CONTACT TERMINATION SO : SOLDER	
CONNECTOR		POSITIONS 8 : 8	CONTACT PLATING GG : 6u" Gold Plating	SHIELD S : With	LED COLOR N : None	HEIGHT 3E : 13.4	MOUNTING STYLE RTH : Right Angle Through Hole



PC Board Layout

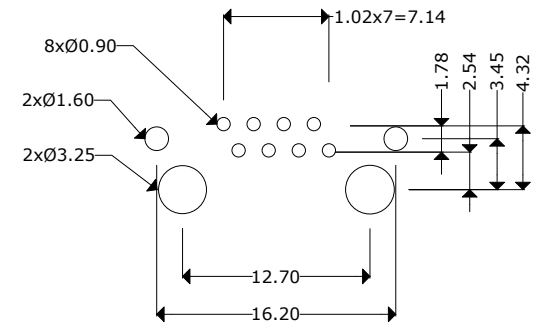

Electrical Parameters

Voltage Rating: 125V
 Current Rating: 1.5A
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ/min.
 Dielectric Withstanding Voltage: 1000V

Materials

Housing: P.B.T. UL94V-0, Black
 Contact: 0.45mm diameter phosphor bronze
 Plating: gold plated over nickel
 Shielded: 0.25mm copper alloy with nickel plated

Remarks:
 Operating Life: 750 Cycles MIN.



RJ45 JACK TOP ENTRY

Document History				Part No.	Drawn
Edits Made	Date	Edited By	Approved By	Scale	
Initial Release	10/18/2021	B. Gibbons	KH Mun	SCNRJ-88GGNSEN-483ESORTH	B. Gibbons 10/18/2021
				Unit	Tolerance
					Unless otherwise stated, tolerances are .x±0.25
					Pages
				mm	1/1