
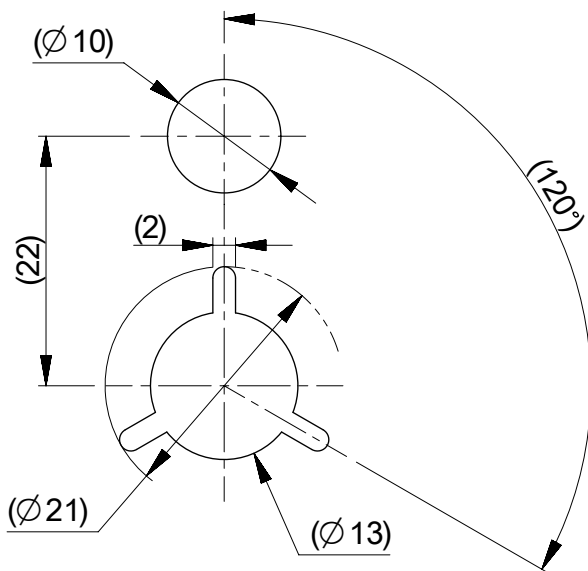


引き出し方向
PULL DIRECTION

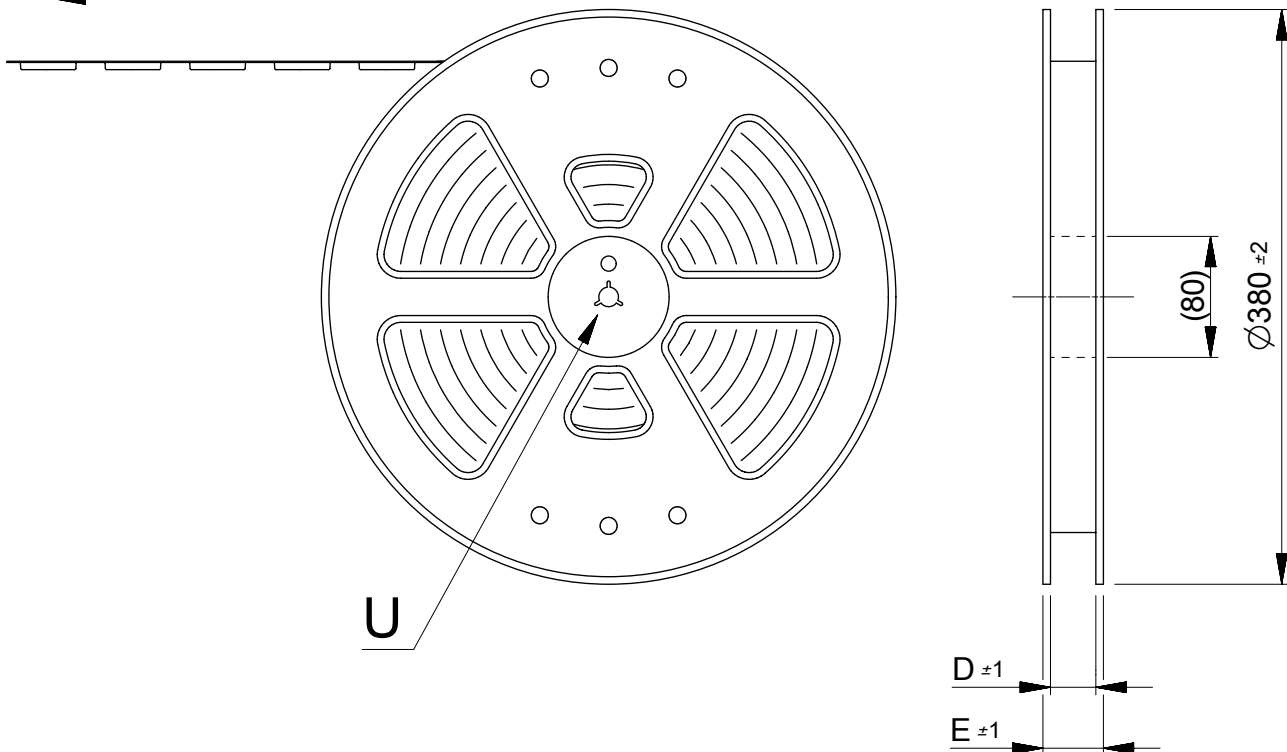


DETAIL U

NOTES

1. 梱包数量：3000個 / リール
NUMBER OF CONNECTORS : 3000 PCS/REEL.


2. リードテープ長さ
LEAD TAPE LENGTH

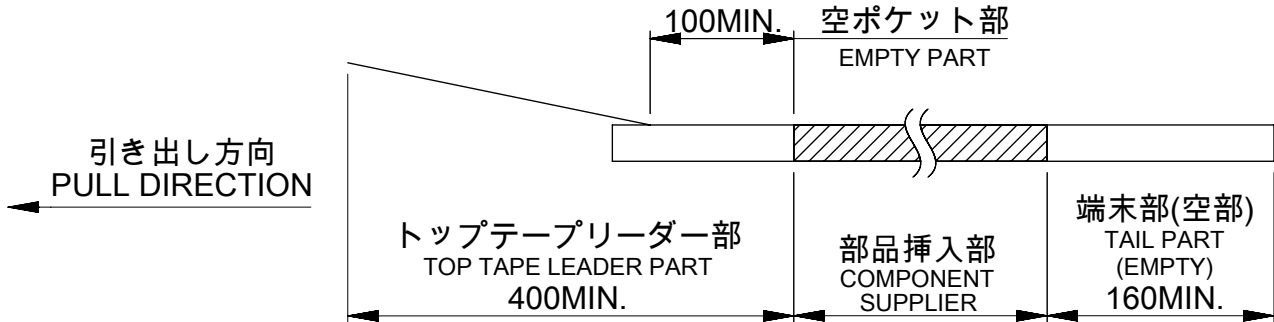

3. カバーテープの剥離強度については、IEC60286-3に準拠。
COVER TAPE PEEL FORCE IS DEFINED BY IEC 60286-3.

4. 製品詳細寸法については、図面 2005281001-SD を参照下さい。
DIMENTIONS OF PRODUCT, REFER TO 2005281001-SD.


5. 材料 MATERIAL
キャリアテープ：ポリスチレン
トップテープ：ポリエチレンテレフタレート、ポリエチレン
リール：ポリスチレン<リサイクル材を含む>
CARRIER TAPE : POLYSTYRENE
TOP TAPE : POLYETHYLENE TEREHTHALATE, POLYETHYLENE
REEL : POLYSTYRENE < RECYCLE MATERIAL CONTAINED >

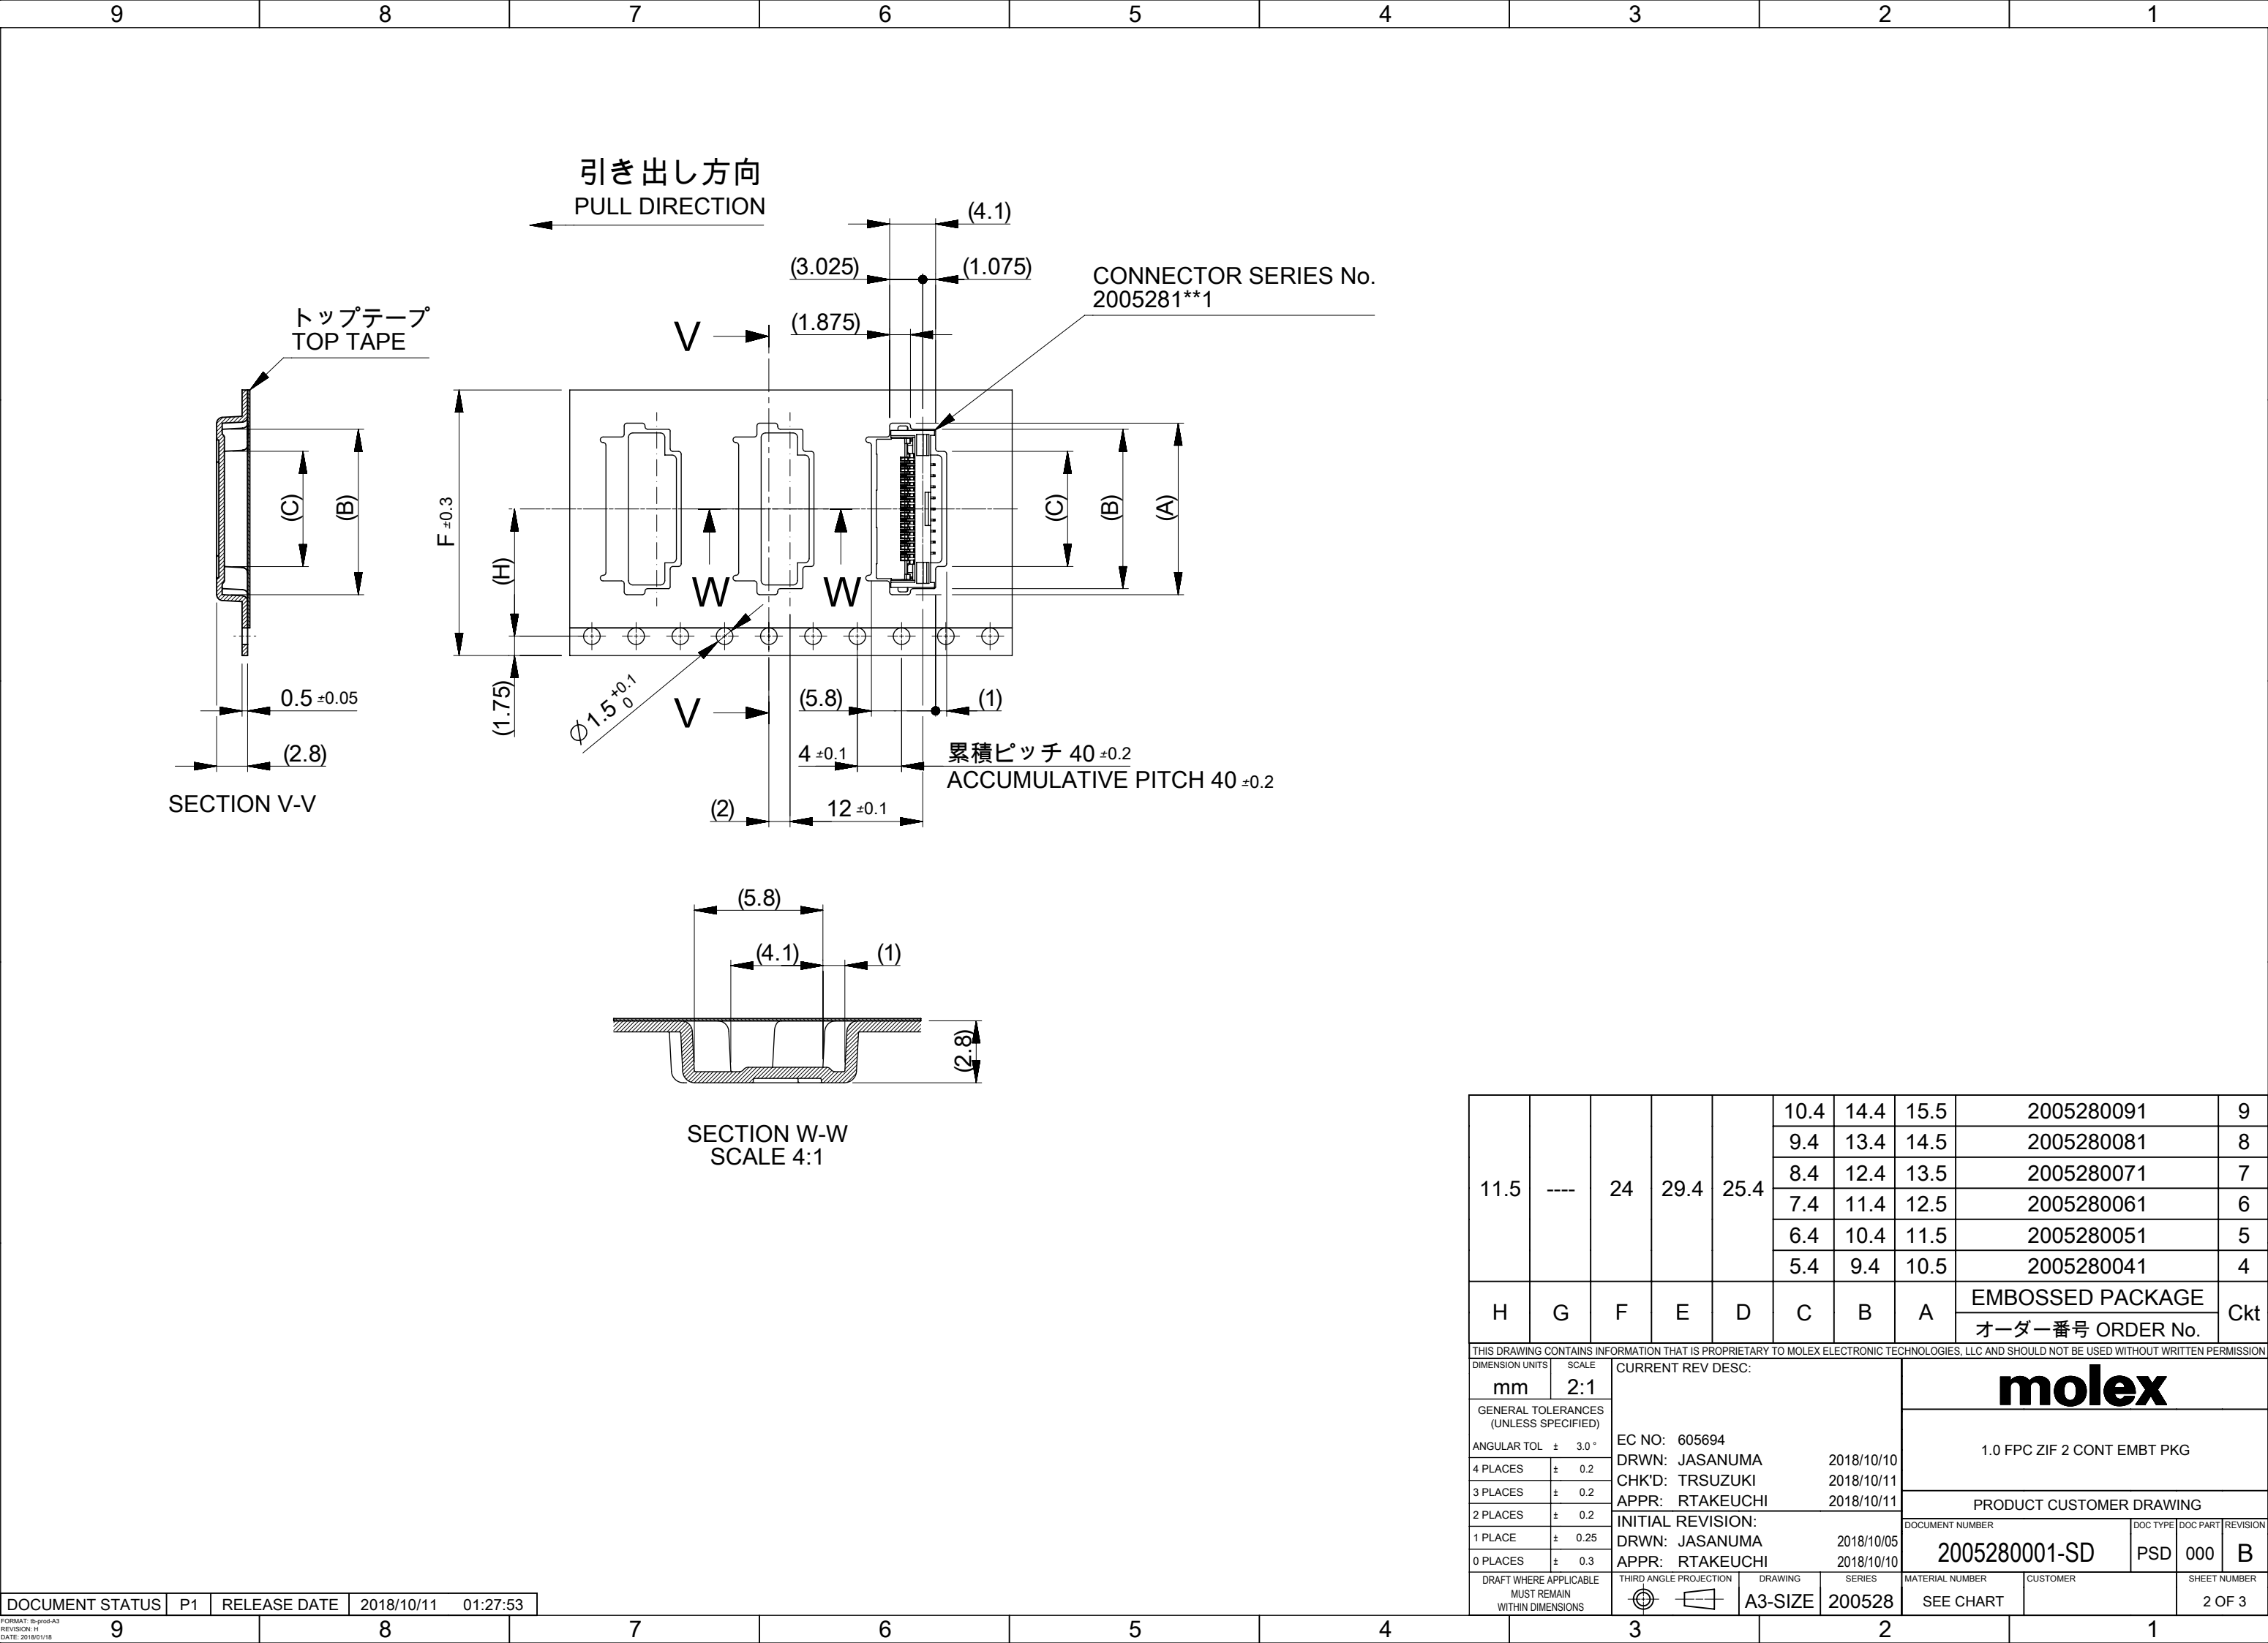


11.5	----	24	29.4	25.4	10.4	14.4	15.5	2005280091	9								
					9.4	13.4	14.5	2005280081	8								
					8.4	12.4	13.5	2005280071	7								
					7.4	11.4	12.5	2005280061	6								
					6.4	10.4	11.5	2005280051	5								
					5.4	9.4	10.5	2005280041	4								
H	G	F	E	D	C	B	A	EMBOSSED PACKAGE	Ckt								
								オーダー番号 ORDER No.									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex									
mm		2:1															
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 605694 DRWN: JASANUMA 2018/10/10 CHK'D: TRSUZUKI 2018/10/11 APPR: RTAKEUCHI 2018/10/11 INITIAL REVISION: DRWN: JASANUMA 2018/10/05 APPR: RTAKEUCHI 2018/10/10													
ANGULAR TOL ± 3.0°																	
4 PLACES		± 0.2															
3 PLACES		± 0.2															
2 PLACES		± 0.2															
1 PLACE		± 0.25		PRODUCT CUSTOMER DRAWING													
0 PLACES		± 0.3															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
										2005280001-SD		PSD		000		B	
						A3-SIZE		200528		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		2 OF 3	





DOCUMENT STATUS	P1	RELEASE DATE	2018/10/11	01:27:53
-----------------	----	--------------	------------	----------

FORMAT: ltr-prod-A3
REVISION: 11
DATE: 2018/01/18

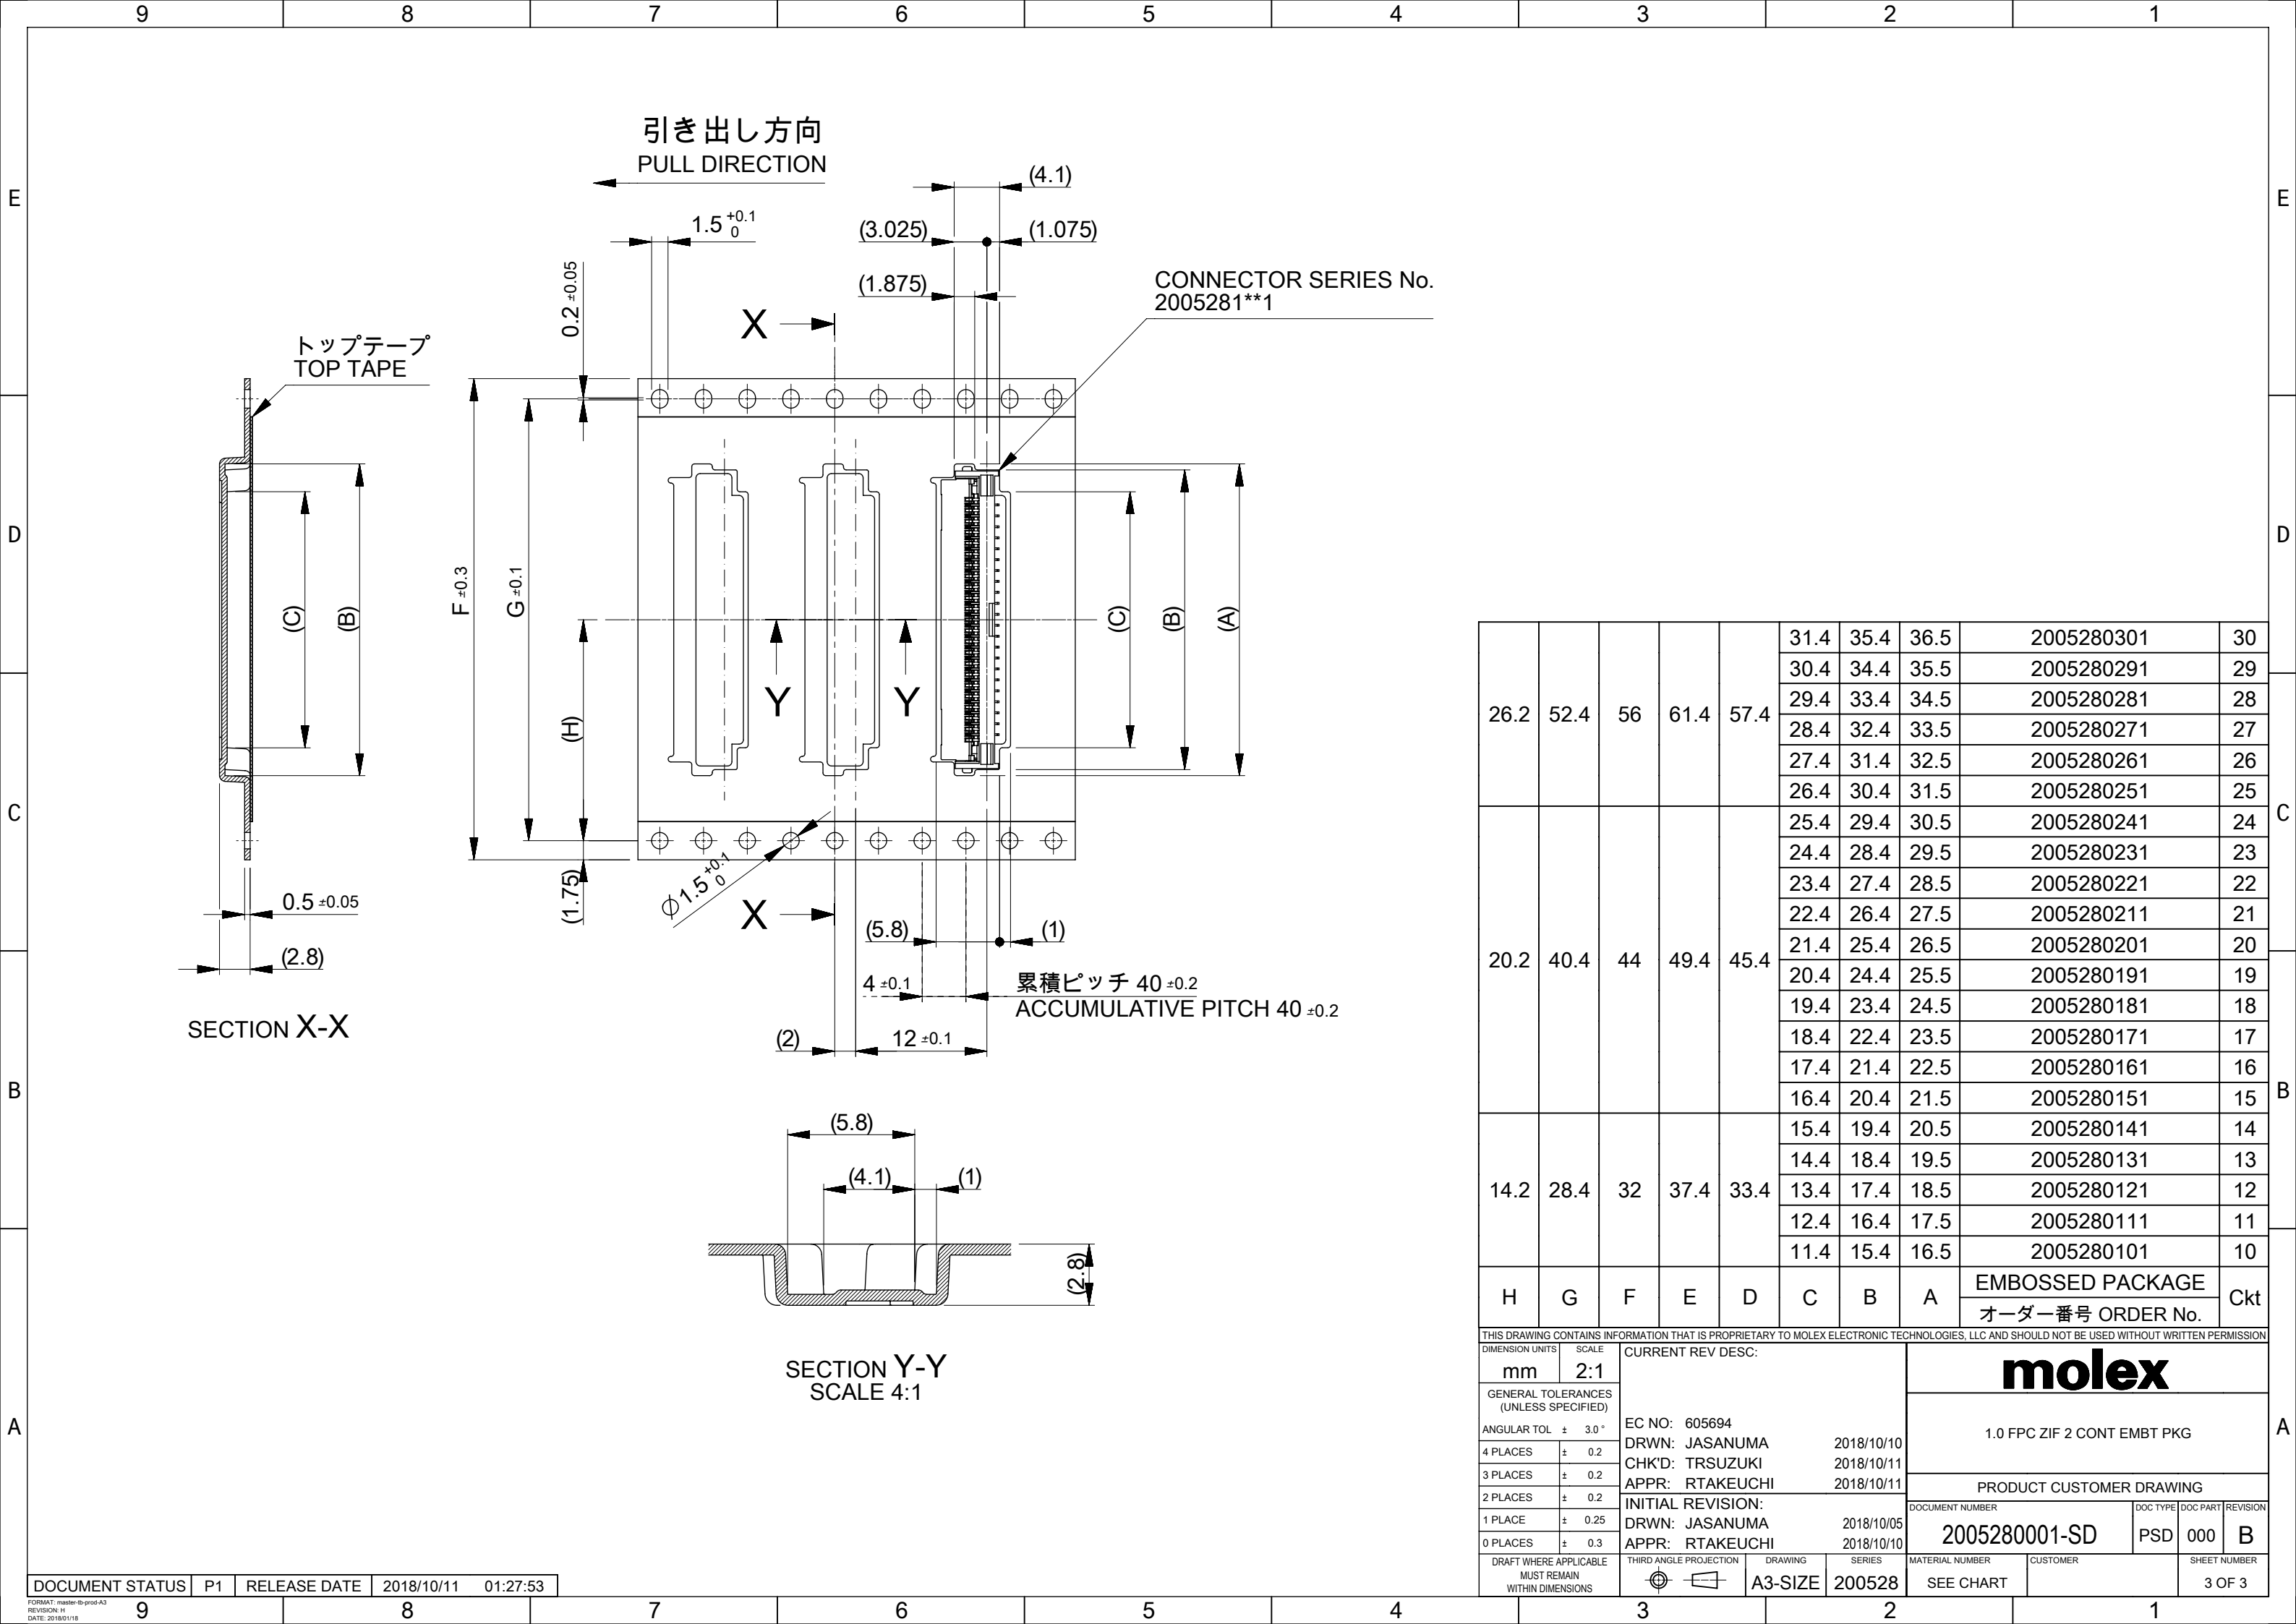

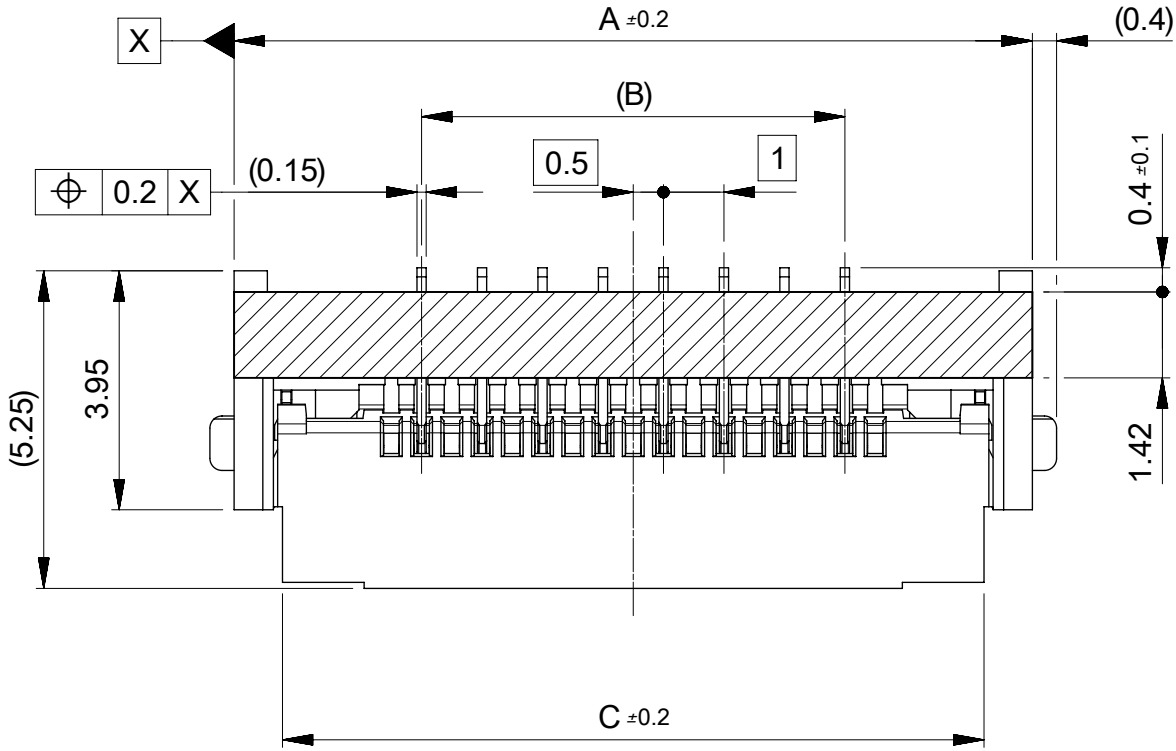

 : PICK UP AREA

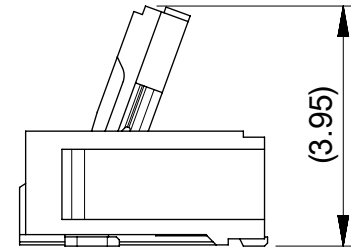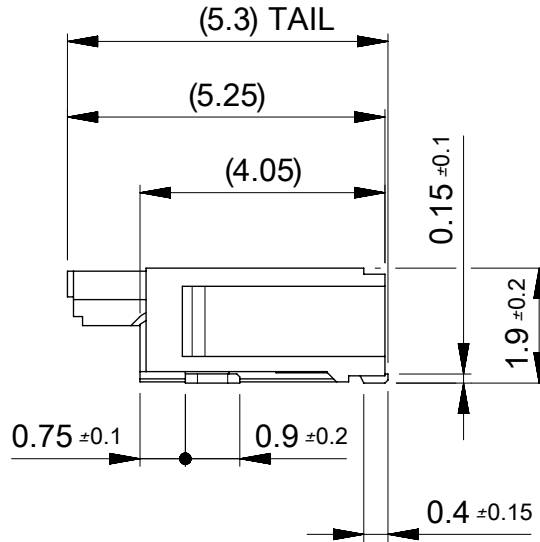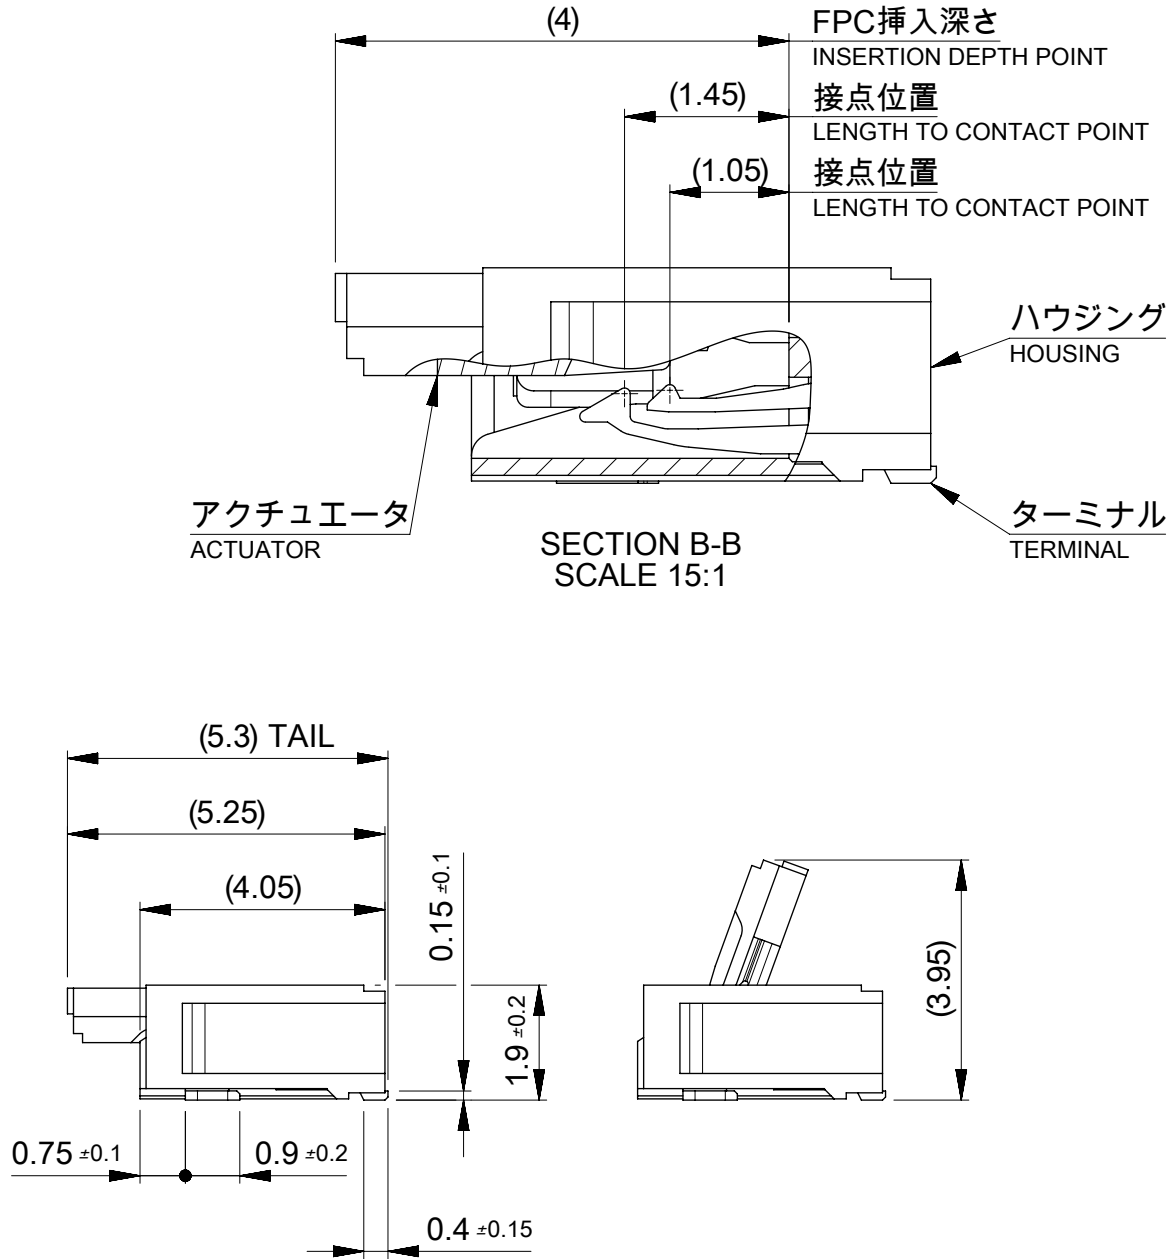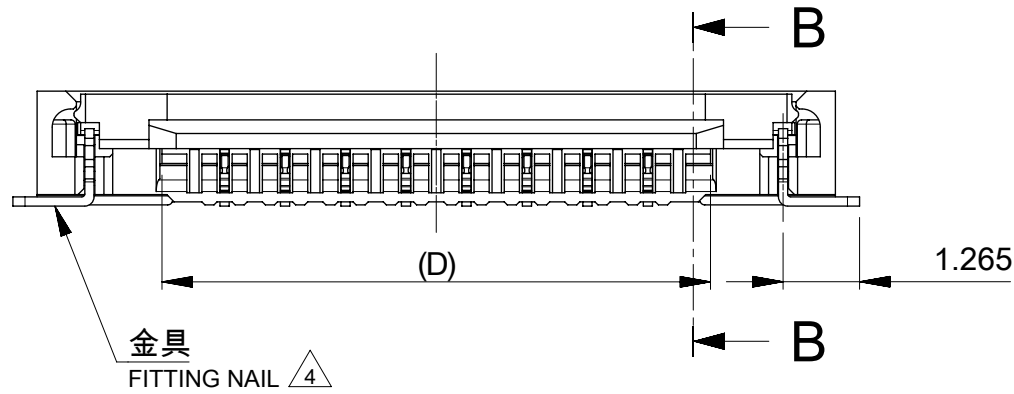


10.07	12.6	8	14.2	2005280091	9
9.07	11.6	7	13.2	2005280081	8
8.07	10.6	6	12.2	2005280071	7
7.07	9.6	5	11.2	2005280061	6
6.07	8.6	4	10.2	2005280051	5
5.07	7.6	3	9.2	2005280041	4
D	C	B	A	EMBOSSED PACKAGE オーダー番号 ORDER No.	Ckt

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				
 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 620381 DRWN: JASANUMA 2019/07/10 CHK'D: YNAITO 2019/08/13 APPR: RTAKEUCHI 2019/08/13 INITIAL REVISION: DRWN: JASANUMA 2018/10/05 APPR: RTAKEUCHI 2018/10/10					molex 1.0 FPC ZIF 2 CONT HSG ASSY											
	mm		8:1												GENERAL TOLERANCES (UNLESS SPECIFIED)						
ANGULAR TOL ± 3.0 °		PRODUCT CUSTOMER DRAWING																			
 = 0	4 PLACES									± 0.2		DOCUMENT NUMBER 2005281001-SD					DOC TYPE PSD	DOC PART 000	REVISION C		
 = 0	3 PLACES		± 0.2																		
 = 0	2 PLACES		± 0.2		THIRD ANGLE PROJECTION					DRAWING A3-SIZE		SERIES 200528		MATERIAL NUMBER		CUSTOMER				SHEET NUMBER 1 OF 4	
 = 0	1 PLACE		± 0.25																		
 = 0	0 PLACES		± 0.3		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																
 = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																				


DOCUMENT STATUS	P1	RELEASE DATE	2019/08/13	10:02:53
-----------------	----	--------------	------------	----------

CONNECTOR SERIES No. 2005281**1

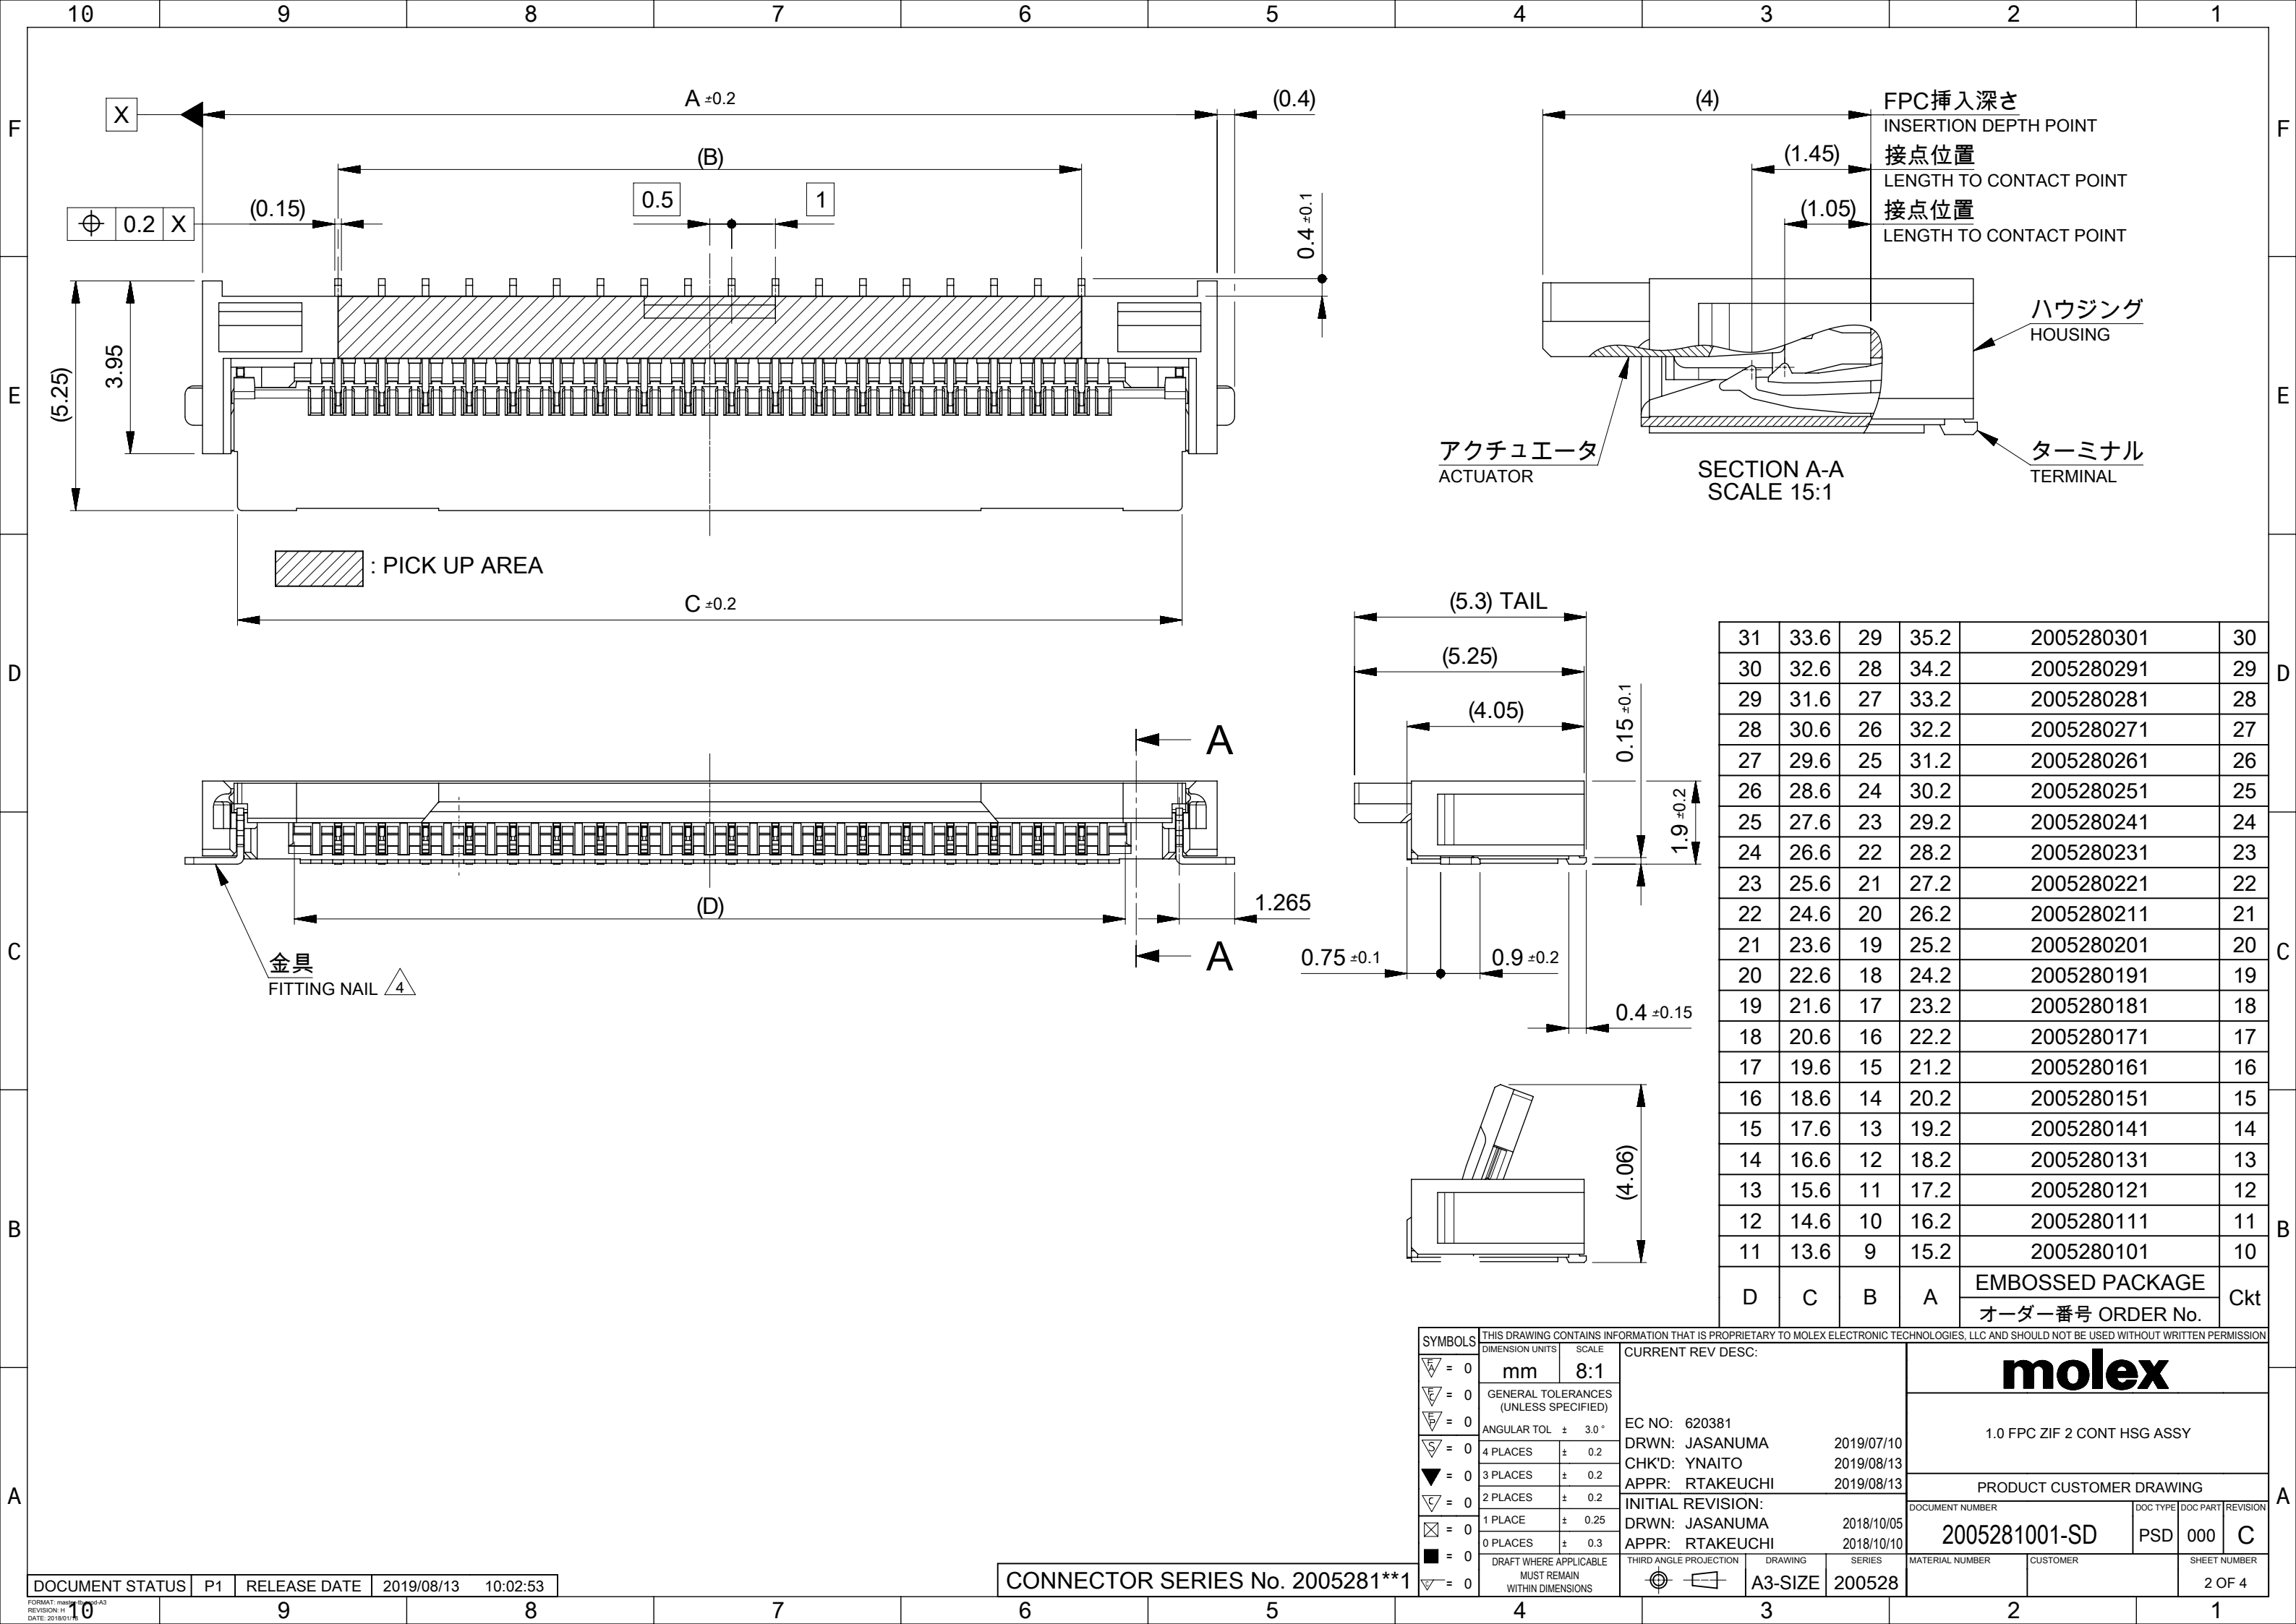

31	33.6	29	35.2	2005280301	30
30	32.6	28	34.2	2005280291	29
29	31.6	27	33.2	2005280281	28
28	30.6	26	32.2	2005280271	27
27	29.6	25	31.2	2005280261	26
26	28.6	24	30.2	2005280251	25
25	27.6	23	29.2	2005280241	24
24	26.6	22	28.2	2005280231	23
23	25.6	21	27.2	2005280221	22
22	24.6	20	26.2	2005280211	21
21	23.6	19	25.2	2005280201	20
20	22.6	18	24.2	2005280191	19
19	21.6	17	23.2	2005280181	18
18	20.6	16	22.2	2005280171	17
17	19.6	15	21.2	2005280161	16
16	18.6	14	20.2	2005280151	15
15	17.6	13	19.2	2005280141	14
14	16.6	12	18.2	2005280131	13
13	15.6	11	17.2	2005280121	12
12	14.6	10	16.2	2005280111	11
11	13.6	9	15.2	2005280101	10
D	C	B	A	EMBOSSED PACKAGE オーダー番号 ORDER No.	Ckt

SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:											
mm		8:1													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL ± 3.0 °															
4 PLACES ± 0.2															
3 PLACES ± 0.2		EC NO: 620381		1.0 FPC ZIF 2 CONT HSG ASSY											
2 PLACES ± 0.2		DRWN: JASANUMA 2019/07/10													
1 PLACE ± 0.25		CHK'D: YNAITO 2019/08/13													
0 PLACES ± 0.3		APPR: RTAKEUCHI 2019/08/13		PRODUCT CUSTOMER DRAWING											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				A3-SIZE		200528		2005281001-SD		PSD		000		C	

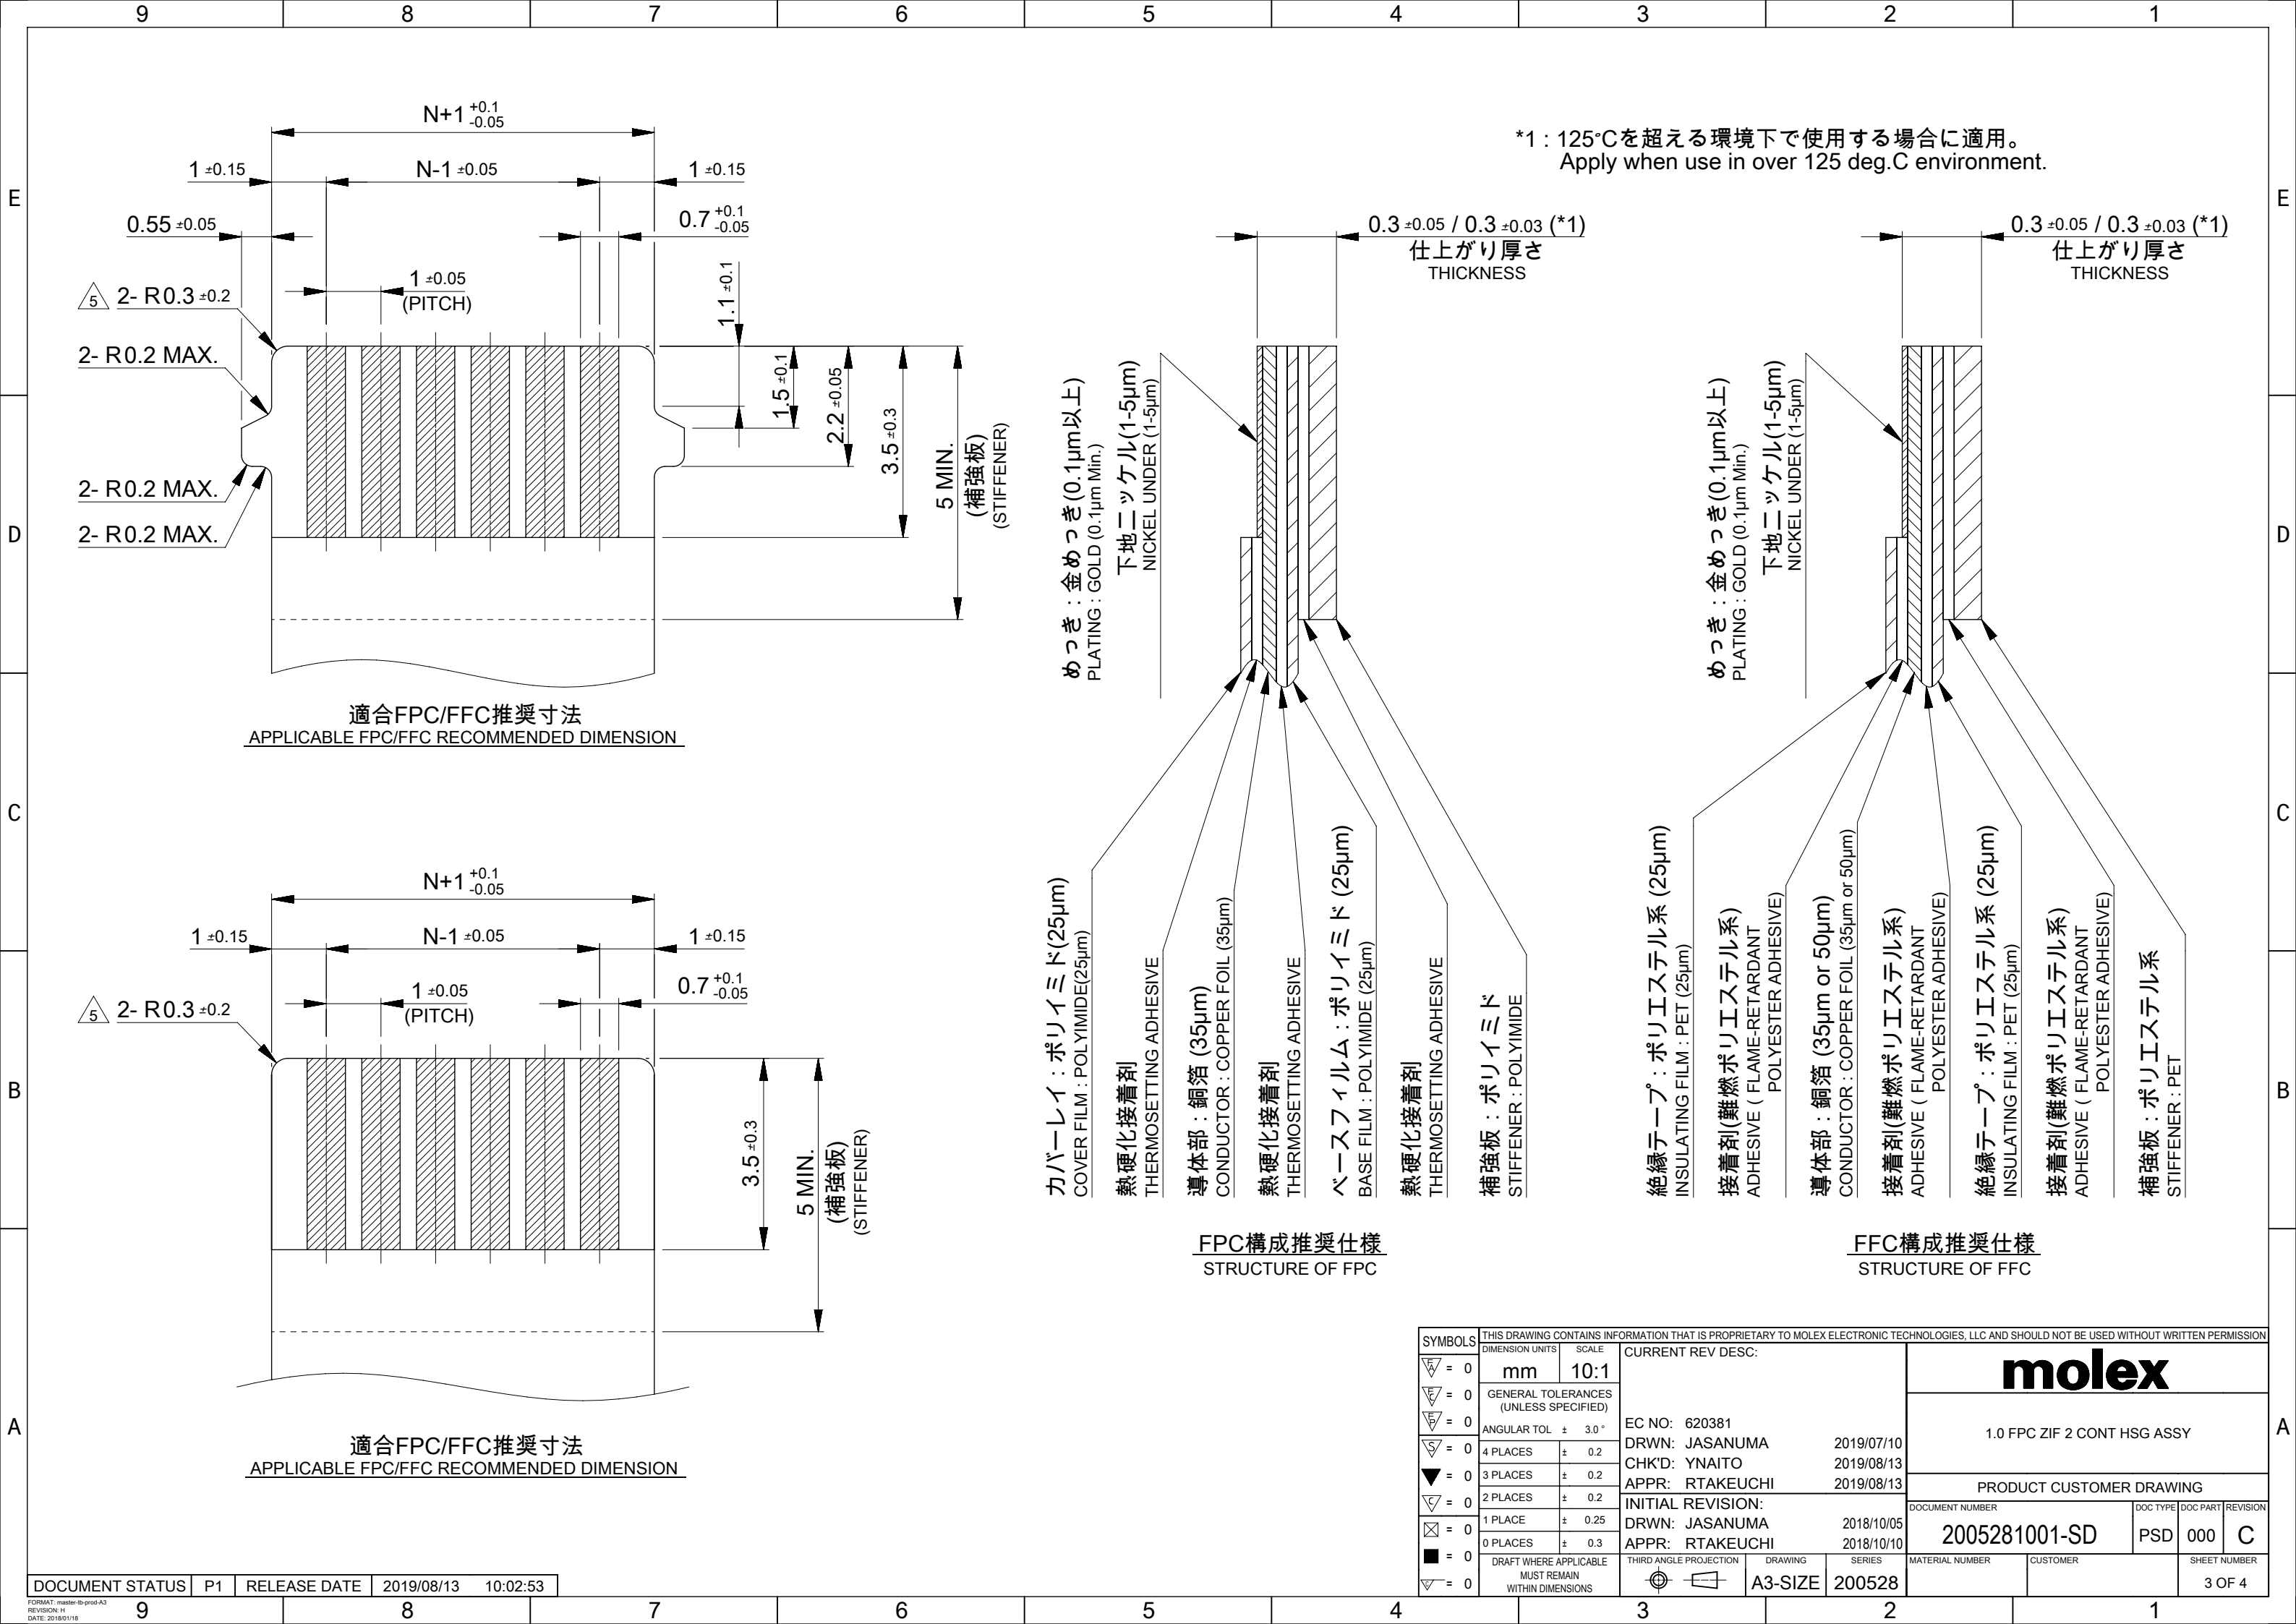

*1 : 125°Cを超える環境下で使用する場合に適用。
Apply when use in over 125 deg.C environment.

適合FPC/FFC推奨寸法
APPLICABLE FPC/FFC RECOMMENDED DIMENSION

適合FPC/FFC推奨寸法
APPLICABLE FPC/FFC RECOMMENDED DIMENSION

FPC構成推奨仕様
STRUCTURE OF FPC

FFC構成推奨仕様
STRUCTURE OF FFC

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

