

NOTE:

MATERIAL

HOUSING:	PBT UL94V-0, BLACK
CONTACT:	BRASS
NUT:	BRASS
SHELL:	ZINC ALLOY
COVER 1:	ZINC ALLOY
COVER 2:	ZINC ALLOY
BACK SHELL:	BRASS
SCREW:	LOW CARBON STEEL

FINISH

CONTACT:	GOLD 10 μ MIN. OVER NICKEL
NUT:	NICKEL PLATED
SHELL:	NICKEL PLATED
COVER 1:	NICKEL PLATED
COVER 2:	NICKEL PLATED
BACK SHELL:	NICKEL PLATED
SCREW:	NICKEL PLATED

ELECTRICAL

RATED CURRENT:	0.5A
RATED VOLTAGE:	50VAC/60VDC
INSULATION RESISTANCE:	100 M Ω hms MIN.
CONTACT RESISTANCE:	10 m Ω hms MAX.
WATER PROOF:	IP67

ENVIRONMENT

OPERATION TEMPERATURE:	-40°C TO +85°C
MAX WIRE AWG:	24

NOTE:

RECOMMENDED CRIMP TOOL:
 -DANIELS HX4 OPEN FRAME CRIMP TOOL
 -Y141 DIE SET // CAVITY A // 0.268"
 RECOMMENDED MAXIMUM CABLE OD:
 - \varnothing 7MM // BUILD UP CABLE WITH HEAT SHRINK

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE
 THE PROPERTY OF NorComp AND SHALL NOT
 BE REPRODUCED, COPIED OR USED AS THE
 BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

P. JENKINS

DATE:

06/12/2018

UNITS = inch [mm]


DO NOT SCALE FROM DRAWING

NorComp


SCALE:	NTS	SHEET	OF	REV
--------	-----	-------	----	-----

DWG NO.



858-XR8-103RKT4

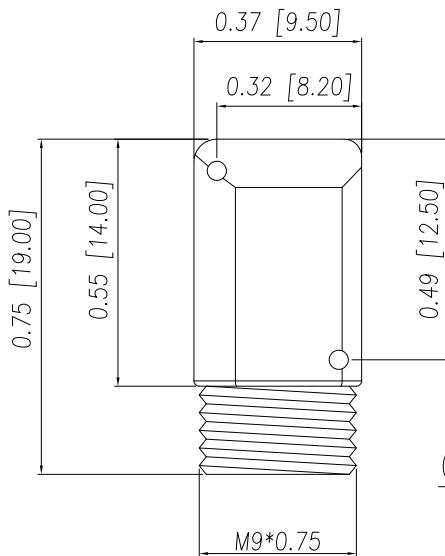



COVER 1

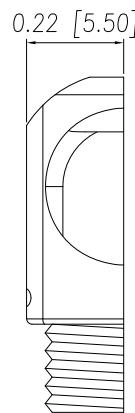

COVER 2

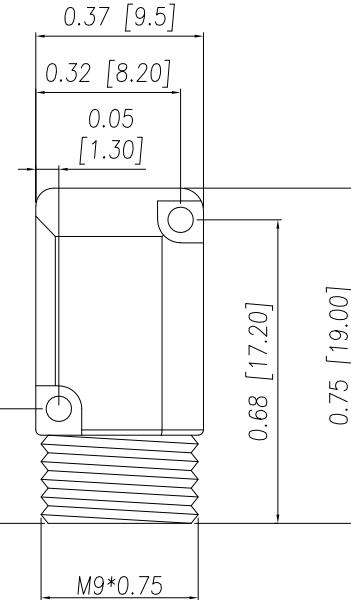

SCREW

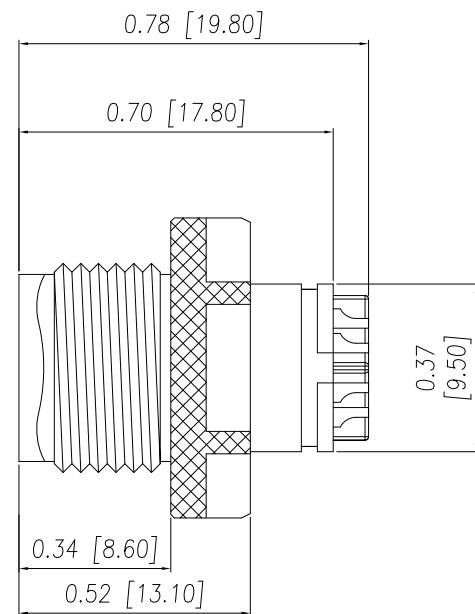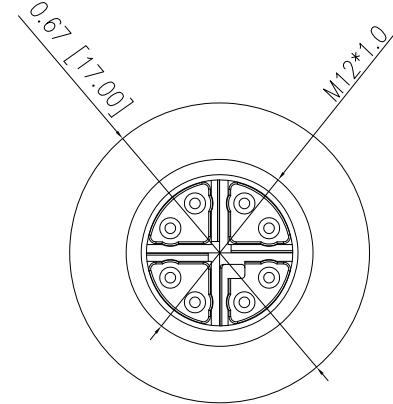

NUT & CONTACT & HOUSING & SHELL

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

P. JENKINS

DATE:

06/12/2018

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 2 OF 2	REV 3
------------	--------------	-------

DWG NO.

858-XR8-103RKT4