

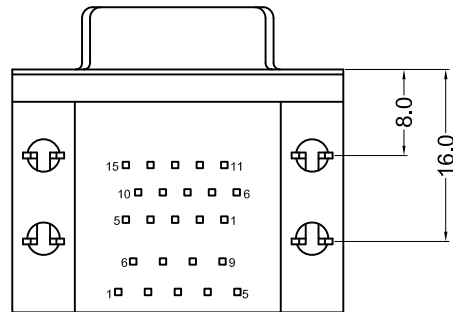
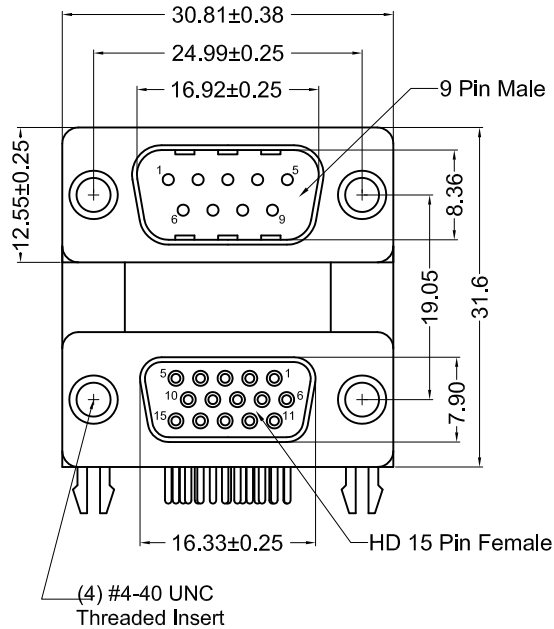


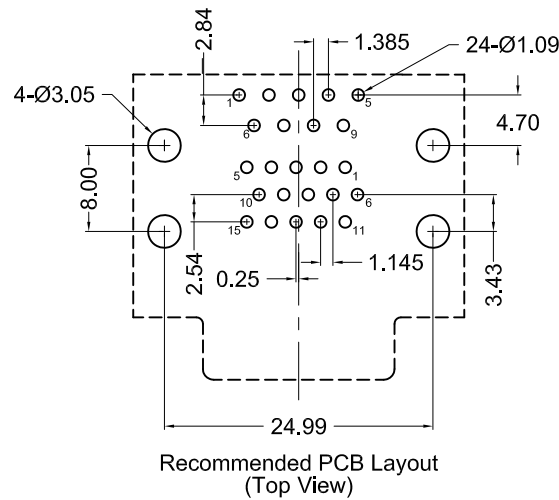

Part Number	Contact Area Plating Finish
K42X-E9P/E15S-A4N	Gold Flash (standard)
K42X-E9P/E15S-A4N15	15u" Gold (15 option)
K42X-E9P/E15S-A4N30	30u" Gold (30 option)

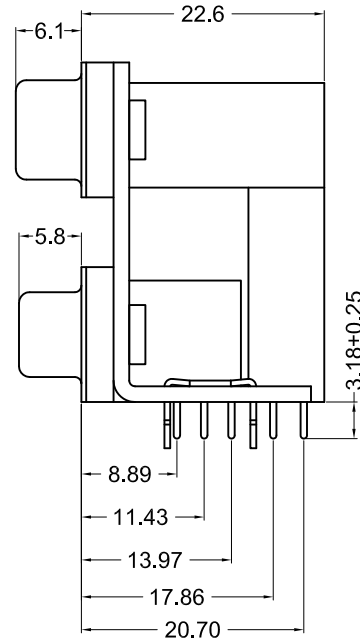

Material and Finish

Shell: Steel, nickel plated

Insulator:

PBT Thermoplastic
UL 94V-0 rated
color: black

Contact Material-

Plug- Brass

Socket- Phosphor Bronze

Contact Plating Options:

Standard: gold flash on
contact area, tin on
solder tails with entire contact
nickel underplated

15 Option: 15u" gold on
contact area, tin on
solder tails with entire contact
nickel underplated

30 Option: 30u" gold on
contact area, tin on
solder tails with entire contact
nickel underplated

Electrical Specifications

Rated Current: 1.2A

Rated Voltage: 30V RMS

Dielectric Withstanding Voltage:
1000V AC (rms) min.

Insulation Resistance:
more than 1000 Megohm
at 500V DC

Contact Resistance:
13 milliohm max.

Operating Temperature:
-55°C to +105°C

RoHS COMPLIANT



Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	12/22/05	New Drawing	H. MA	C.Furumasu	H. MA	12/22/05
A2	6/14/07	ECO #07-018	A. Frederick	H. MA		
A3	03/14/08	ECO #07-049	S. Vien	H. MA		
A4	07/14/10	ECO #10-051	S. Vien	H. MA		
A5	12/31/17	ECO #17-037	J. Elbanna	C. Furumasu		
A6	03/25/19	ECO #19-020	H. MA	D. Shehan		

K42X-E9P/E15S-A4N

9 Male / 15HD Female D-Sub, 0.750" Spacing

w/ 4 Gnd. Brackets, RoHS Compliant

