

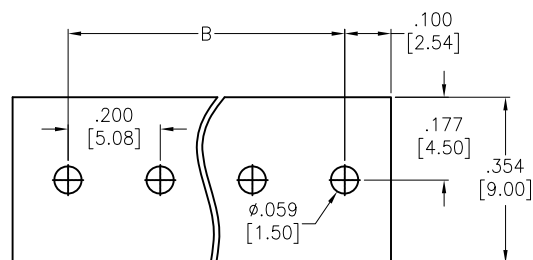


APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/2/20	

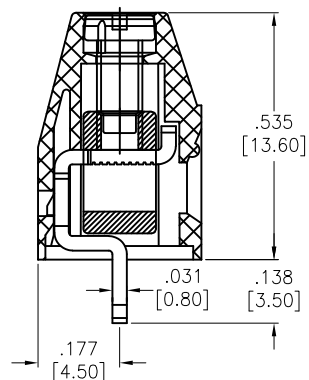

RECOMMENDED PCB LAYOUT

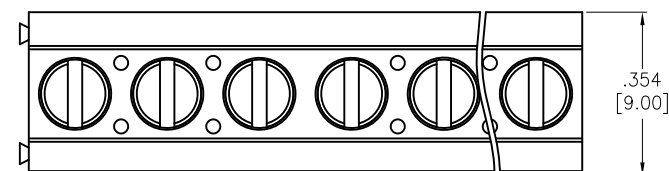

SECTION A-A

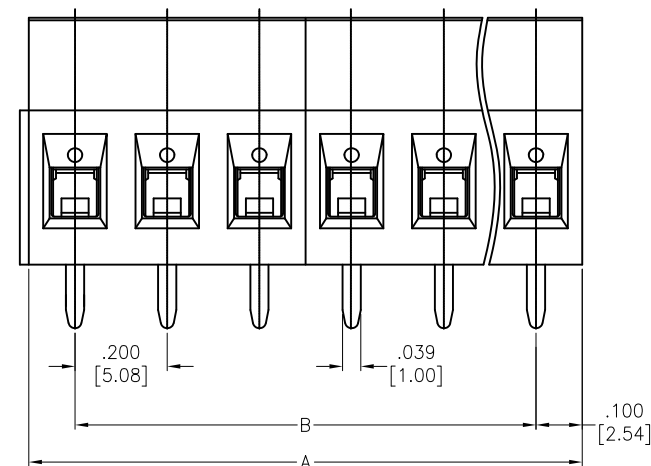

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contacts: Copper Alloy, Tin plated
 Screw: M2.5
 Electrical:
 Voltage rated: 300V
 Current rating: 16A
 Dielectric withstanding voltage: 1,600V for 1 minute
 Mechanical:
 Wire range: 22-12AWG
 Torque: 0.4Nm max
 Wire strip length: 6-7mm
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 02 thru 24
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ±.10 .XX ± .020 Ø.XX ±.015 .XXX ± .015 Ø.XXX ±.010			ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS DRAWN LH 7/2/20 CHECKED BL 7/2/20 APPROVED			TITLE EURO BLOCK, .197 [5.08] PITCH		
SIZE X			PART NO. EBAFA-XX-D		REV. -
REF: S00067C			SCALE: NTS		SHEET 1 OF 1