

NOTES:



MATERIAL: PHOSPHOR BRONZE

PLATING: 10u" GOLD OVER 50u" NICKEL
NICKEL ON WIRE CRIMP AREA



WIRE SIZE: 24-26 AWG

CONTACT RESISTANCE: 20 mOHMS INITIAL

CONTACT AMPERAGE RATING: 3 AMPS

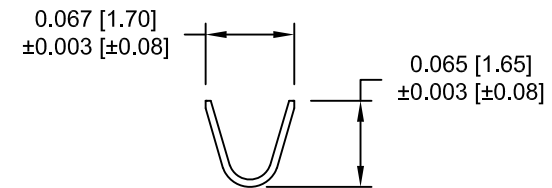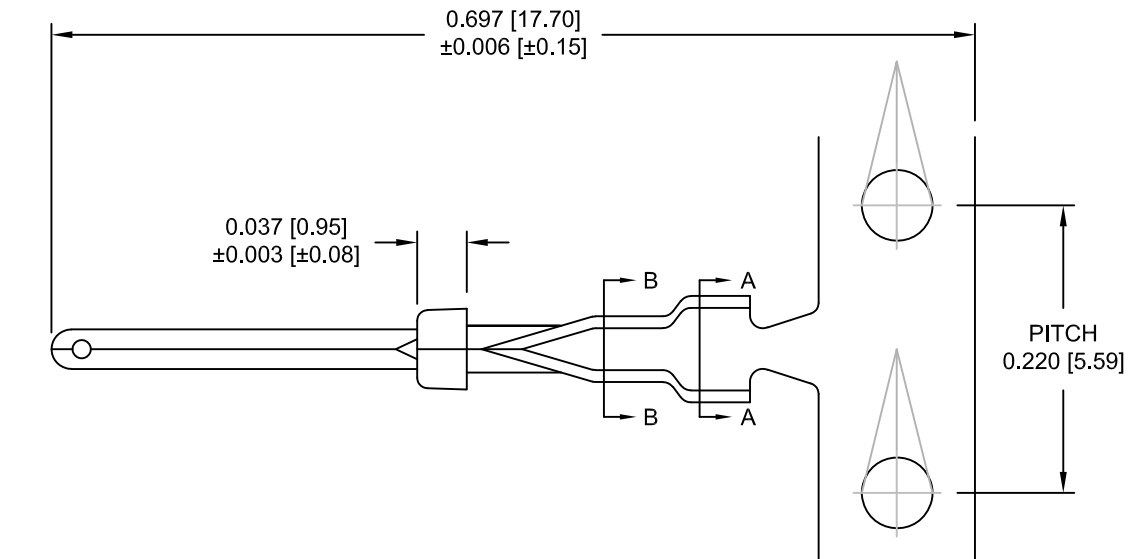

SECTION A - A

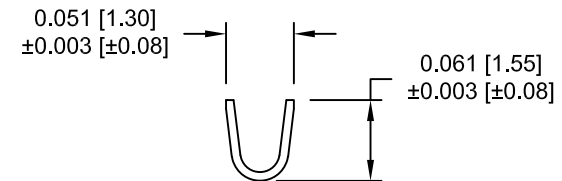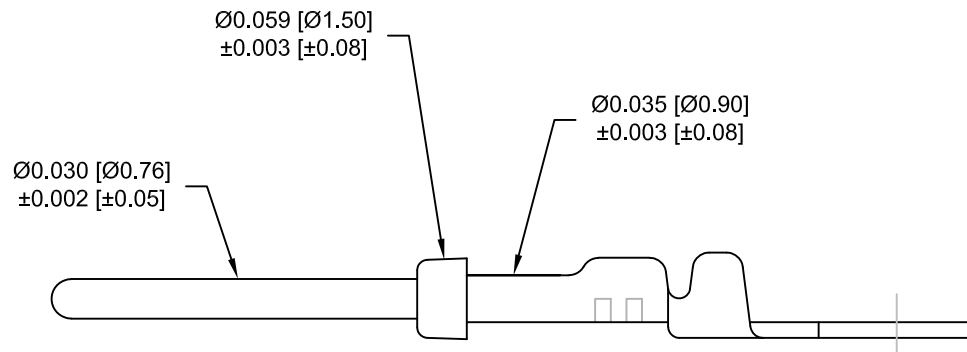

SECTION B - B

FOR CLARITY
HIDDEN LINES
NOT SHOWNSERIES
TYPE

0 = REEL (10,000 per reel)

1 = LOOSE (500 per bag)

GENDER

1 = MALE

180-Y01-170L001

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

09/03/2019

NorComp

SCALE:

NTS

SHEET

1

OF


2

REV

1

DWG NO.

180-Y01-170L001

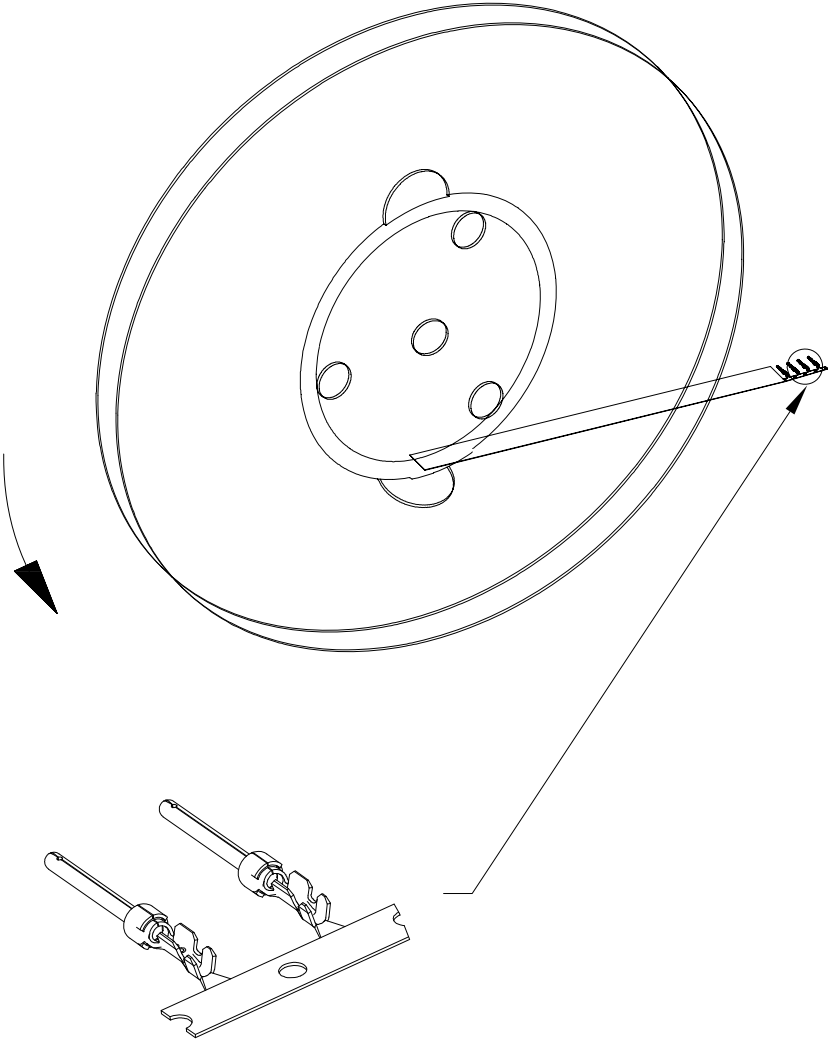

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: J. KADEL		SCALE: NTS	SHEET 2 OF 2	REV 1
		DATE: 09/03/2019		DWG NO. 180-Y01-170L001		