
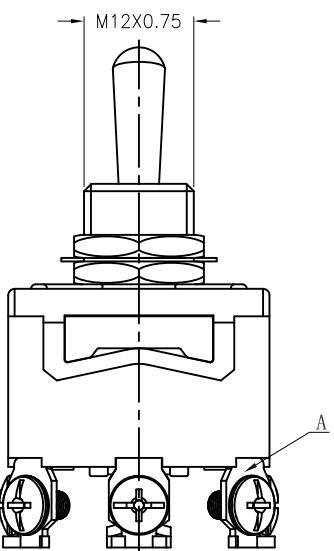
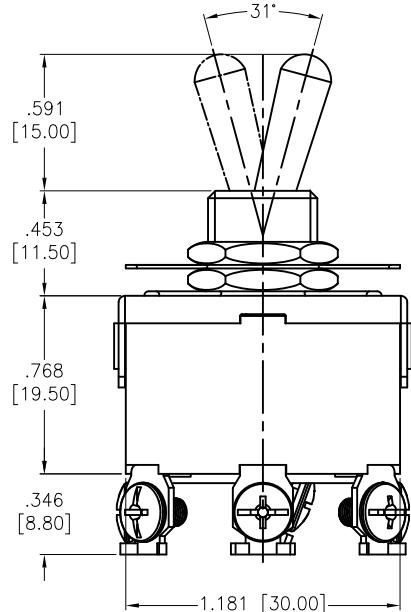






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/10/21	

D

RECOMMENDED
PANEL CUT-OUTCIRCUIT DIAGRAM
(3PDT) ON-ON

2 WAY

SPECIFICATIONS:

Material:

Body: Bakelite, Color: Black

Lever: Brass, Nickel plated

Terminal: Brass, Silver plated

Electrical:

Rating: 10A @ 250V AC
15A @ 125V AC

Contact resistance: 100 mΩ max

Insulation resistance: 100 MΩ min

Dielectric withstanding voltage: 1500V AC/5S

Electrical Life: 10,000 cycles

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X	± .10
.XX	± .020
.XXX	± .015
	Ø.XX
	Ø.XXX
	± .010

DRAWN: 8/10/21

CHECKED: 8/10/21

APPROVED:

ADAM
TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710TITLE: SWITCH, TOGGLE MEDIUM, 3PDT,
ON-ON, SCREW LUGSIZE: X PART NO.: SW-T1-6X-D-C1-K3 REV. -
REF: - SCALE: NTS SHEET 1 OF 1THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH