

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	510470800	PicoBlade1.25 Plug Hsg 8P		1	PC
B	501338000	PicoBlade1.25 Crimp Plug Term Chain		8	PC
C	--	Blank label 12.7x35.5mm (WHT:12.7mm) HF		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A2	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A3	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A4	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A5	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A6	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A7	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A8	--	CABLE 28 AWG UL 1061 BLACK	BLACK


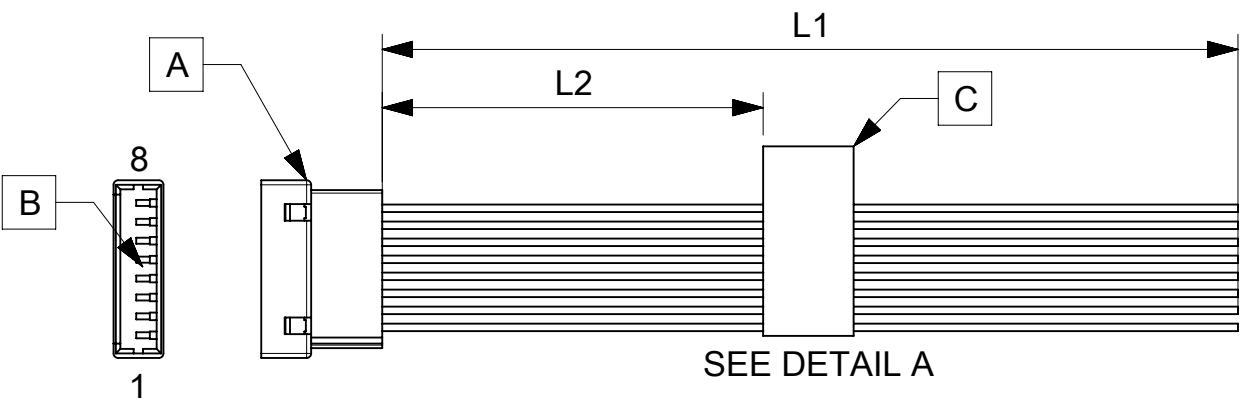


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2181110800	75±5	30	8 CIRCUIT PICOBLADE P:BLUNT CABLE 75MM
2181110801	150±6	70	8 CIRCUIT PICOBLADE P:BLUNT CABLE 150MM
2181110802	225±6	105	8 CIRCUIT PICOBLADE P:BLUNT CABLE 225MM
2181110803	300±8	145	8 CIRCUIT PICOBLADE P:BLUNT CABLE 300MM
2181110804	425±8	205	8 CIRCUIT PICOBLADE P:BLUNT CABLE 425MM



- NOTES
1. Connector view shown is from mating side.
 2. Free ends must be blunt cut.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in flag type on the cables.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
04/03/2021	A	INITIAL RELEASE	ARAJU
DOCUMENT STATUS	P1	RELEASE DATE	2021/03/26 04:03:41

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
	mm	NTS
	CURRENT REV DESC:	
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	ANGULAR TOL	± °
	4 PLACES	±
	3 PLACES	±
DIVISIONAL SYMBOLS	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
EC NO: 659320		2021/03/04
DRWN: ARAJU		2021/03/26
CHK'D: RDESAI01		2021/03/26
APPR: RDESAI01		2021/03/26
INITIAL REVISION:		2021/03/04
DRWN: ARAJU		2021/03/26
APPR: RDESAI01		2021/03/26
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION
A4-SIZE		SERIES
218111		MATERIAL NUMBER
SEE TABLE		CUSTOMER
GENERAL MARKET		SHEET NUMBER
1 OF 1		