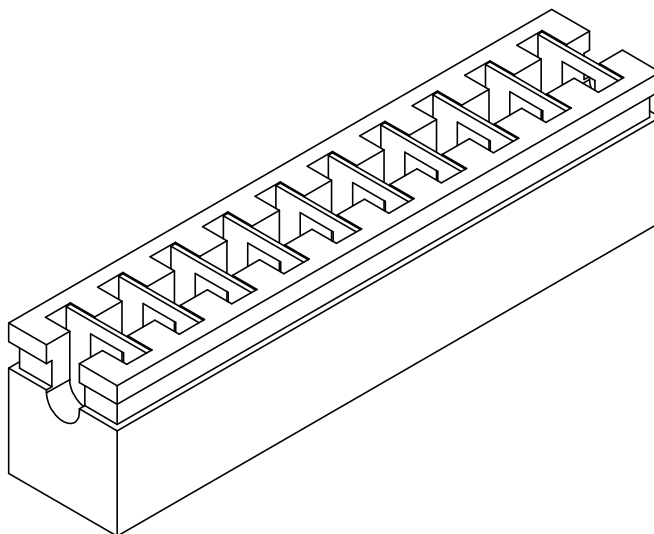



MSH-1 **X** - **01** - **XX** - **LF**
(A) (B) (C) (D)

- A. Plating Options
~ See Plating Options below
B. Shunt Style
C. No. of Shunts
~ See shunt box below
D. Lead Free

Plating options	
G	-10µ Gold on Contact Area/ Flash on Tail
T	-Matte Tin all Over

Specifications:
Current Rating: 3.0 Ampere
Insulation Resistance: 1000M Ohms Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20M Ohms Max.
Operation Temperature: -40°C to +105°C
Max. Process Temperature
Peak: 260°C up to 20 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Manual Solder: 350°C up to 5 secs.

No. of Shunts	Dim. A
02	.200
03	.300
04	.400
05	.500
06	.600
07	.700
08	.800
09	.900
10	1.000

Materials:
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T

Tails may be clipped to achieve specific dimensions.

Products cut to specific sizes are uncancellable/ nonreturnable.
Parts are subject to change without notice.



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
Major League Electronics. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
Major League Electronics IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: ONE DECIMALS ±.100 TWO DECIMAL ±.010 THREE DECIMAL ±.005 FOUR DECIMAL ±.002		DRAWN: EOW	01/19/15
NEXT ASSY USED ON		CHECKED: GWE	01/19/15
APPLICATION		ENG APPR:	
DO NOT SCALE DRAWING		MFG APPR:	
INTERPRET GEOMETRIC TOLERANCING PER:		ADDRESS: 2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com	
FINISH		TITLE: MSH-1 SERIES	
		SIZE: C	REV: B
		SCALE: 8:1	SHEET 1 OF 1

