

ARK12106CHSSLT

FIBOX
Enclosing innovations



Sample image

Order symbol: ARK12106CHSSLT

Product nbr: 8561543

Description: PC Enclosure


Remarks: Hinged transparent cover w/S.S. Lockable latch. Base includes 1/2 and 3/4 inch knock-outs

EAN: 6418074097194

El. number:

- Finland:
- Denmark:
- Sweden:

Including: Hinged cover. Base with 10-32 brass inserts, latched cover with formed in place PUR gasket, stainless hinge pin. Base with 1/2 and 3/4 inch knock-outs. Quick release latches. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.

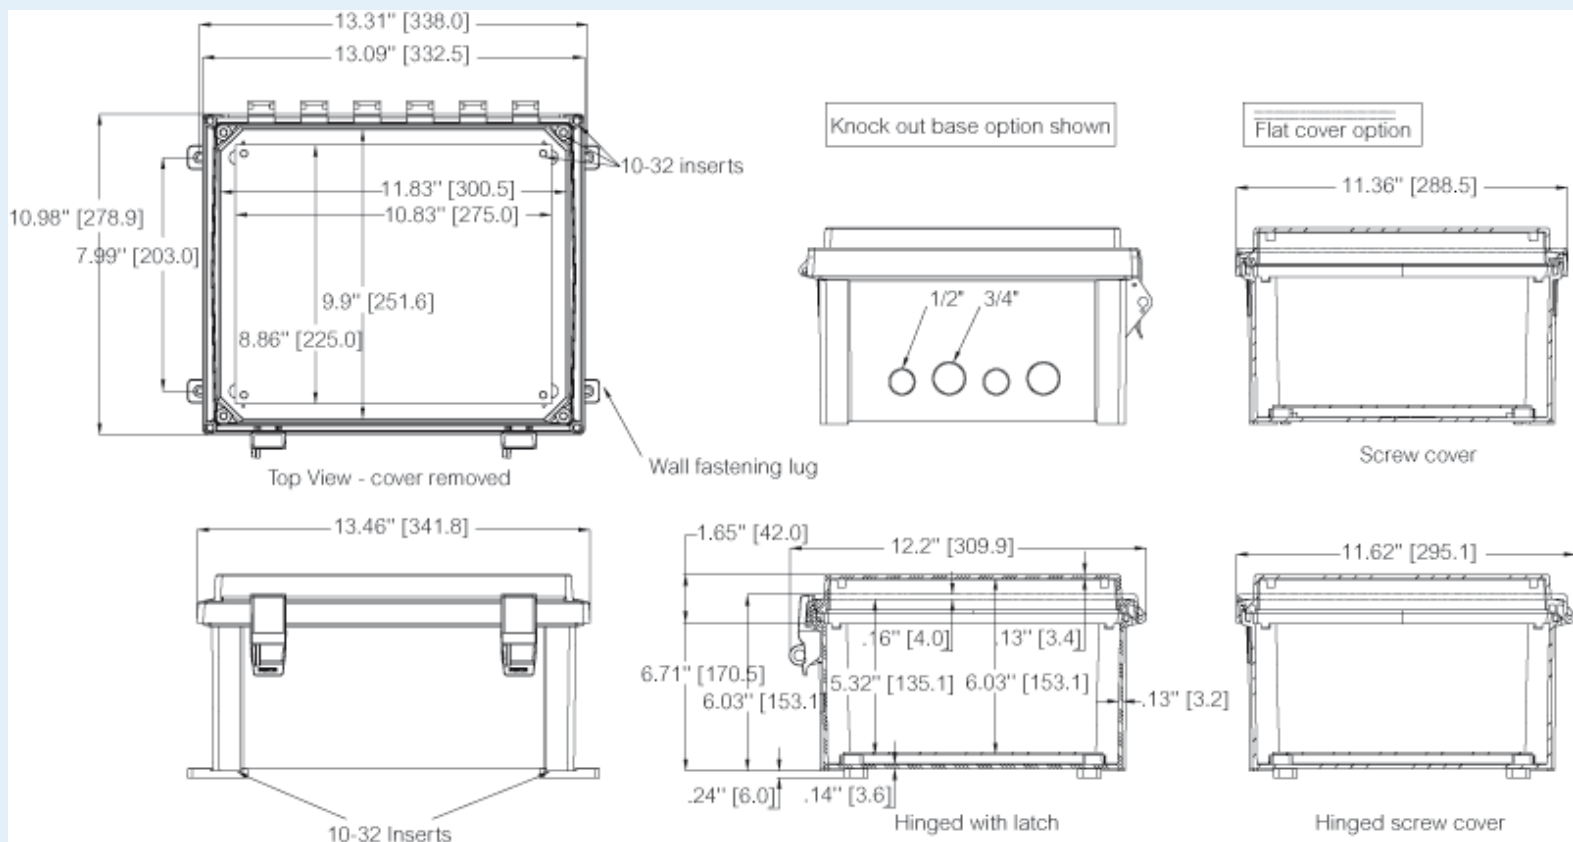

Dimensions:

	Height	Width	Depth
mm:	305	254	152

Accessories:

ASPHK12	Swing Panel Kit w/o Panel
---------	---------------------------

inch:	12	10	6
-------	----	----	---

Materials:

Material:

Polycarbonate

Base colour:

RAL 7035 -light grey

Cover colour:

Transparent

Gasket material:

Polyurethane

Temperatures:

Temperature °C (short term)::

-40 ... 140

Temperature °C (continuous):

-40 ... 80

Temperature °F (short term):

-40 ... 250

Temperature °F (continuous):

-40 ... 175

ALBP1210	Aluminum Back Panel (274 x 226)
ASP1210	Aluminum Swing Panel (254.5 x 305.7 x 0)
ASPK1210	Swing Panel Kit incl. Panel
ADFP1210	Dead Front Panel w/ screws (257.5 x 307.5 x 0)
APBP1210	PVC Back Panel (274 x 226)
AMFL10	10" Mounting Flange Set
ABP1210	Painted Steel Back Panel (274 x 226)
Rating:	
Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK09;
Electrical insulation:	Not insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 508
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	NEMA 4, 4X, 6, 6P, 12, 12K and 13
Certificates:	