

# PCM 95/60 G



Sample image

**Order symbol:** PCM 95/60 G

**Product nbr:** 6016331

UL Code: 6416331

UL Name: UL PCM 95/60 G

**Description:** Enclosure. PC


**Remarks:** Opaque cover

**Including:** Base with PUR gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

**EAN:** 6418074054777

**El. number:**

- Finland: 3421392
- Denmark: 8212027569
- Sweden: 2535300

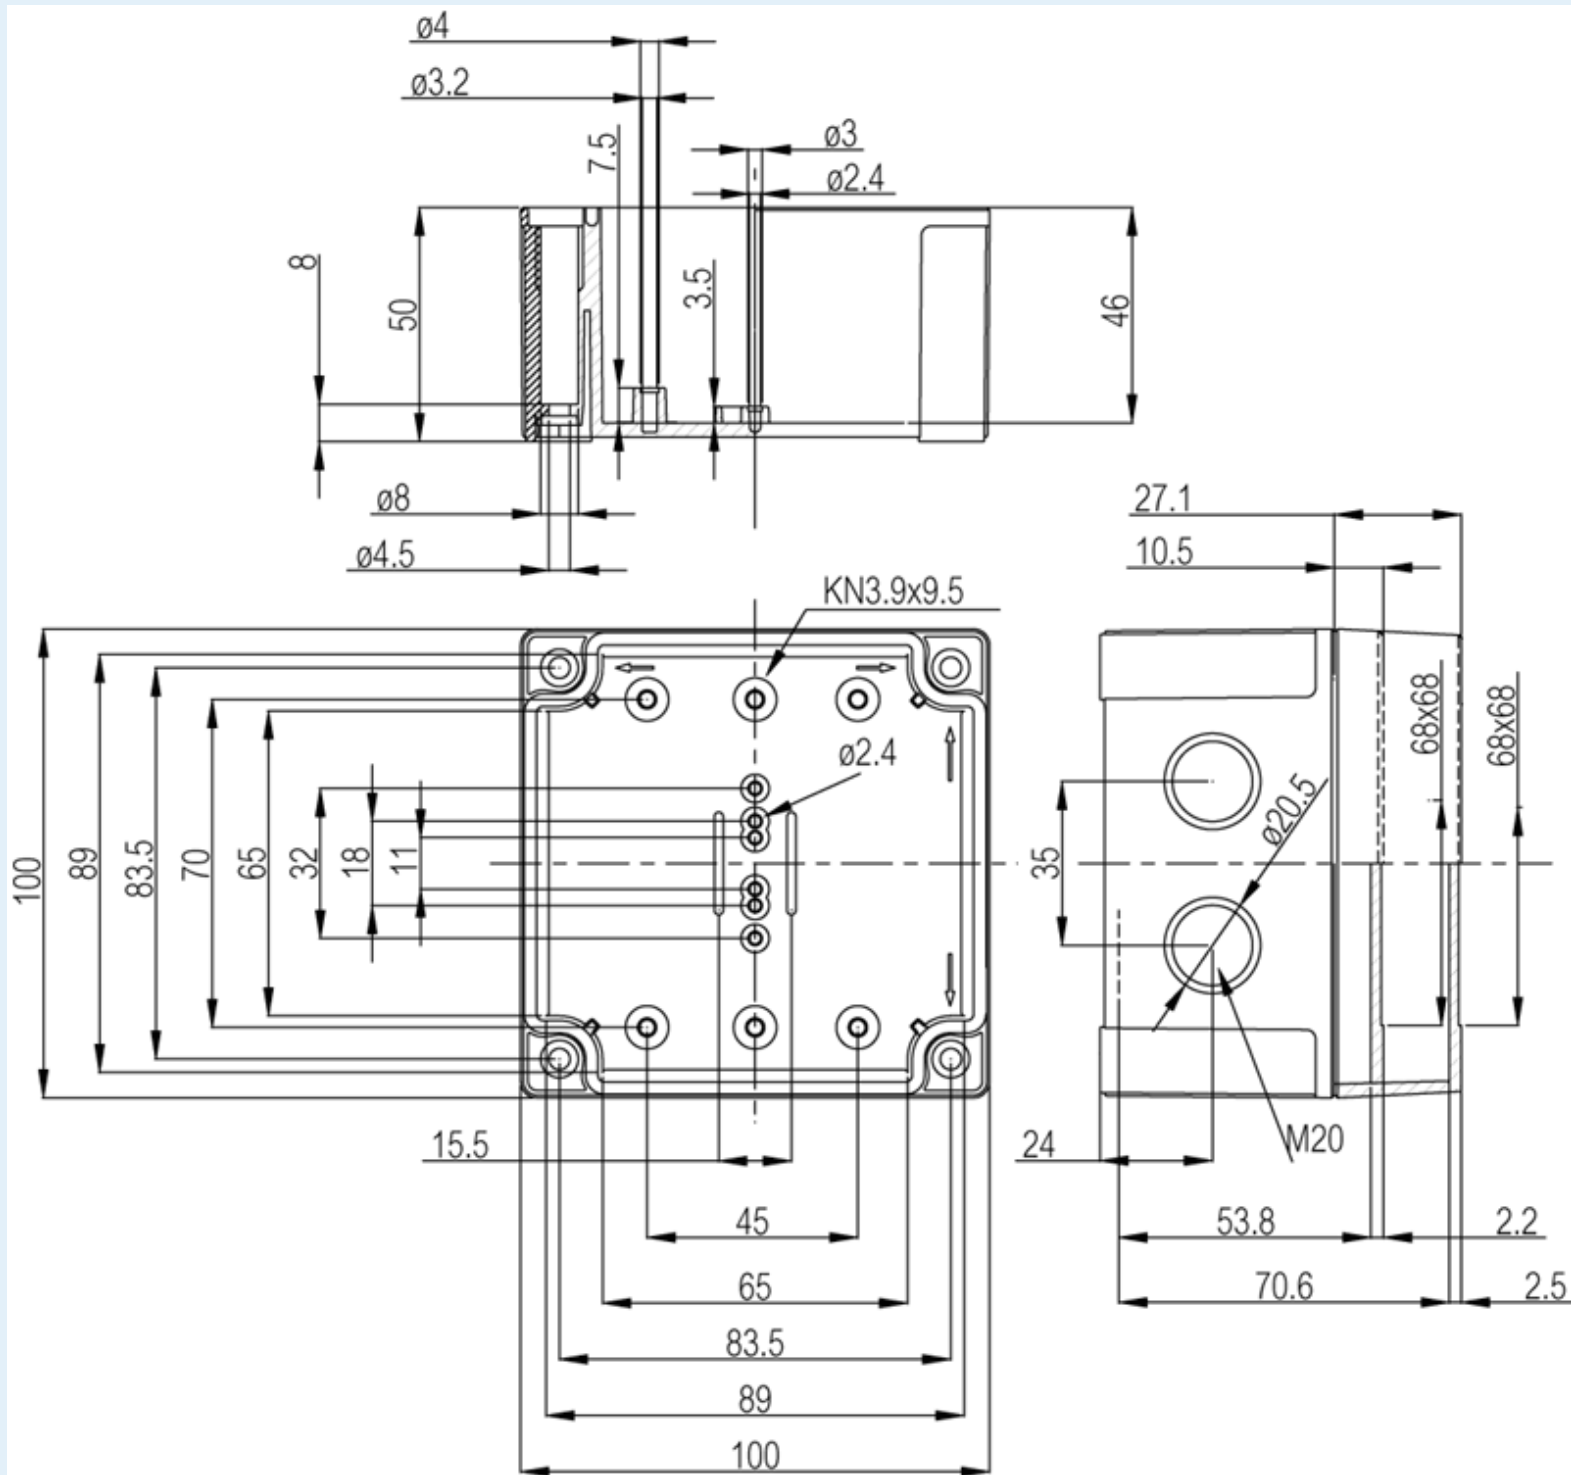

#### Dimensions:

|       | Height | Width | Depth |
|-------|--------|-------|-------|
| mm:   | 100    | 100   | 60    |
| inch: | 3.94   | 3.94  | 2.36  |

#### Materials:

|                  |                      |
|------------------|----------------------|
| Material:        | Polycarbonate        |
| Base colour:     | RAL 7035 -light grey |
| Cover colour:    | RAL 7035 -light grey |
| Gasket material: | Polyurethane         |

#### Accessories:

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| MIN 8    | DIN-15 Mounting rail. for enclosures:<br>(80 x 15 x 1)          |
| B-3      | DIN-35 Mounting rail. for enclosures:<br>(80 x 35 x 1)          |
| FP 22046 | Mounting foot kit (4 pcs)                                       |
| MIV 95   | Back Panel (Galvanized steel). for enclosures:<br>(66 x 80 x 1) |

#### Rating:

|                                |             |
|--------------------------------|-------------|
| Ingress protection (EN 60529): | IP66; IP67; |
|--------------------------------|-------------|

**Temperatures:**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (short term):: | -40 ... 120 |
| Temperature °C (continuous):  | -40 ... 80  |
| Temperature °F (short term):  | -40 ... 250 |
| Temperature °F (continuous):  | -40 ... 175 |

|                                        |                   |
|----------------------------------------|-------------------|
| Impact Resistance (EN 62262):          | IK08;             |
| Electrical insulation:                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1                 |
| UV resistance:                         | UL 508            |
| Flammability Rating:                   | UL 746C 5"        |
| Glow Wire Test (IEC 695-2-1) °C:       | 960 °C            |
| NEMA Class                             |                   |

**Certificates:**

Certificate FI 40847