





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/14	
A		REVISED SPEC.	6/4/14	HR/VY
B		UPDATE DRAWING	1/9/18	AY/KC
C		UPDATE DRAWING	10/20/20	LH/EY

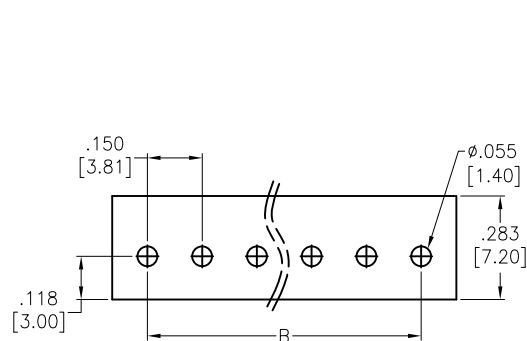

RECOMMENDED PCB LAYOUT

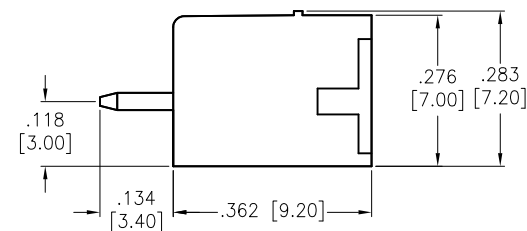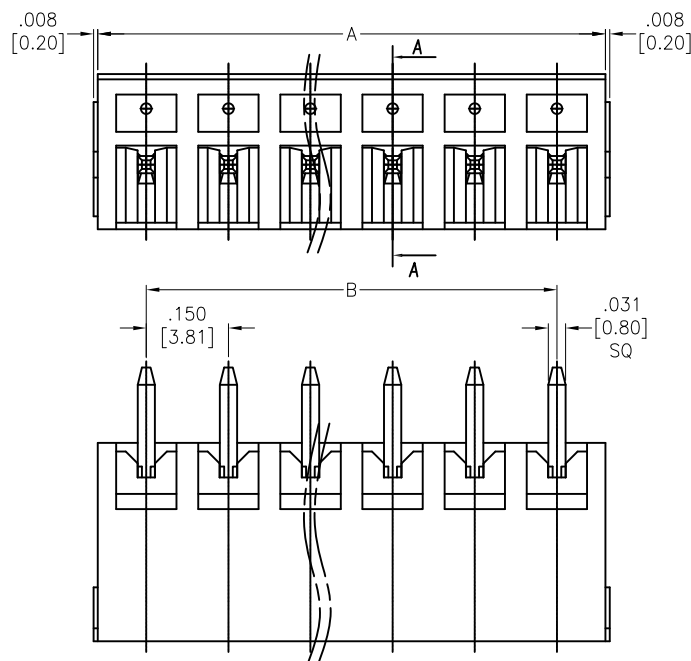

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300 VAC

Current rating: 8 Amp

Dielectric withstanding voltage: 1,600 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 02 thru 24

A= .150 [3.81] x No. of Spaces + .181 [4.60]

B= .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	5/5/14
CHECKED	SY	5/5/14
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
TERMINAL BLOCK, STRAIGHT, .150" [3.81] PITCH

SIZE X	PART NO. EBRA-XX-B	REV. C
REF: S00067C	SCALE: NTS	SHEET 1 OF 1