

6		5		4	
ITEM	PART#	DESCRIPTION		QTY	UOM
A	510211000	PicoBlade1.25 Rec Hsg 10P		1	PC
B	500588000	PicoBlade1.25 Crimp Rec Term Chain Tin		10	PC
C	--	Blank label 12.7x35.5mm (WHT:12.7mm) HF		1	PC

2		1	
FROM	TO	DESCRIPTION	COLOR
A1	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A2	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A3	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A4	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A5	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A6	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A7	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A8	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A9	--	CABLE 28 AWG UL 1061 BLACK	BLACK
A10	--	CABLE 28 AWG UL 1061 BLACK	BLACK


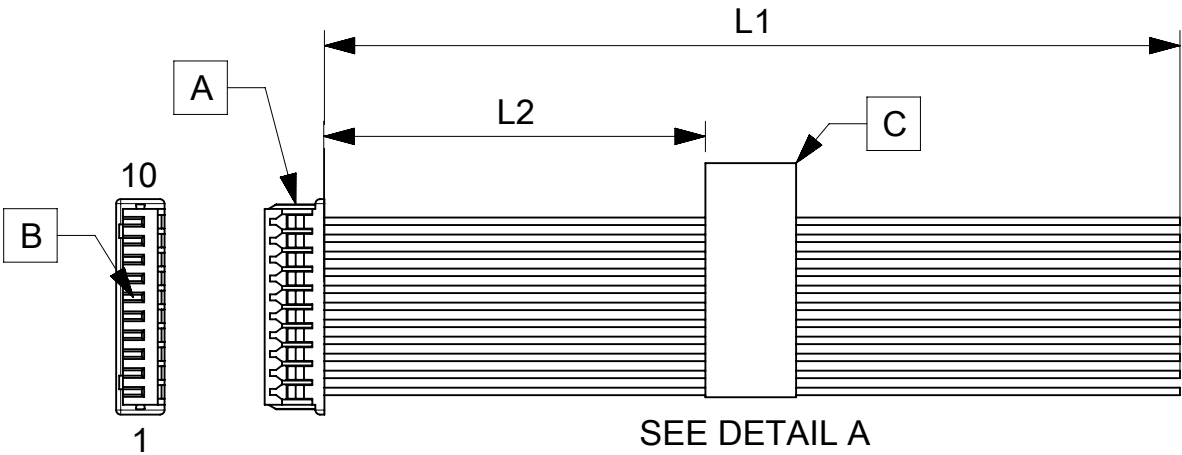


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2181121000	75±5	30	10 CIRCUIT PICOBLADE R:BLUNT CABLE 75MM
2181121001	150±6	70	10 CIRCUIT PICOBLADE R:BLUNT CABLE 150MM
2181121002	225±6	105	10 CIRCUIT PICOBLADE R:BLUNT CABLE 225MM
2181121003	300±8	145	10 CIRCUIT PICOBLADE R:BLUNT CABLE 300MM
2181121004	425±8	205	10 CIRCUIT PICOBLADE R:BLUNT CABLE 425MM



- NOTES
1. Connector view shown is from mating side.
 2. Free ends must be blunt cut.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in flag type on the cables.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
04/03/2021	A	INITIAL RELEASE	ARAJU
DOCUMENT STATUS	P1	RELEASE DATE	2021/03/26 04:03:45

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
= 0 = 0 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex		
	mm		NTS							
	GENERAL TOLERANCES (UNLESS SPECIFIED)									
	ANGULAR TOL ± °									
	DIVISIONAL SYMBOLS	4 PLACES		±				EC NO: 659320		
3 PLACES		±		DRWN: ARAJU						