


MATERIALS AND FINISHES


BODY BRASS
PLATED GOLD

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

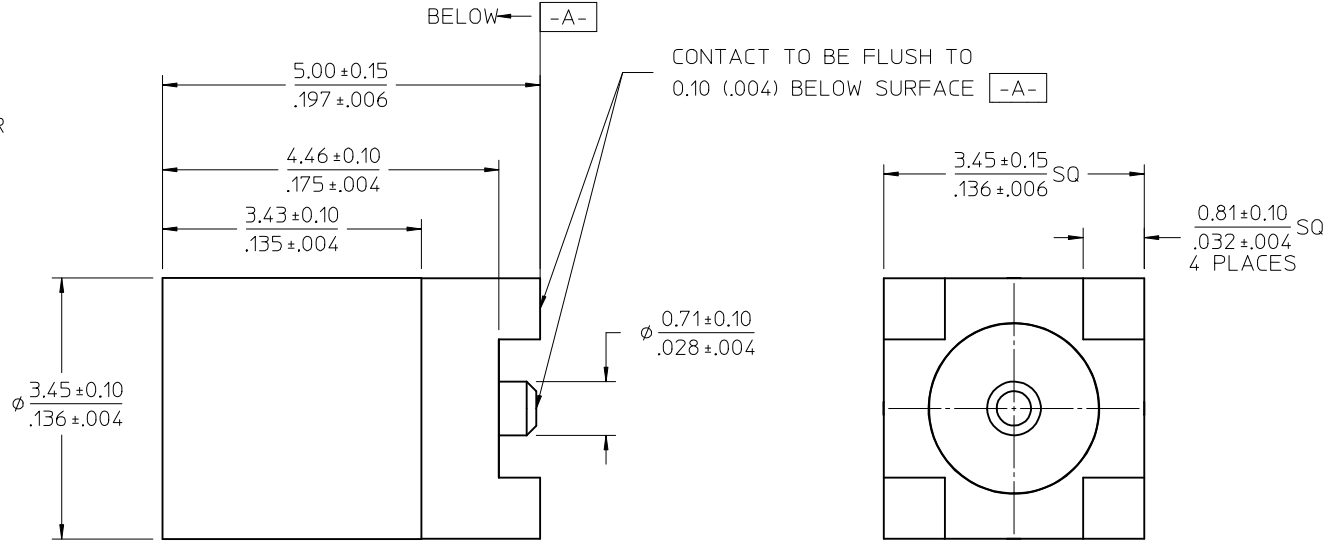

PS-89675-1920	ELECTRO/MECH PERFORM.
SPECIFICATION	DESCRIPTION

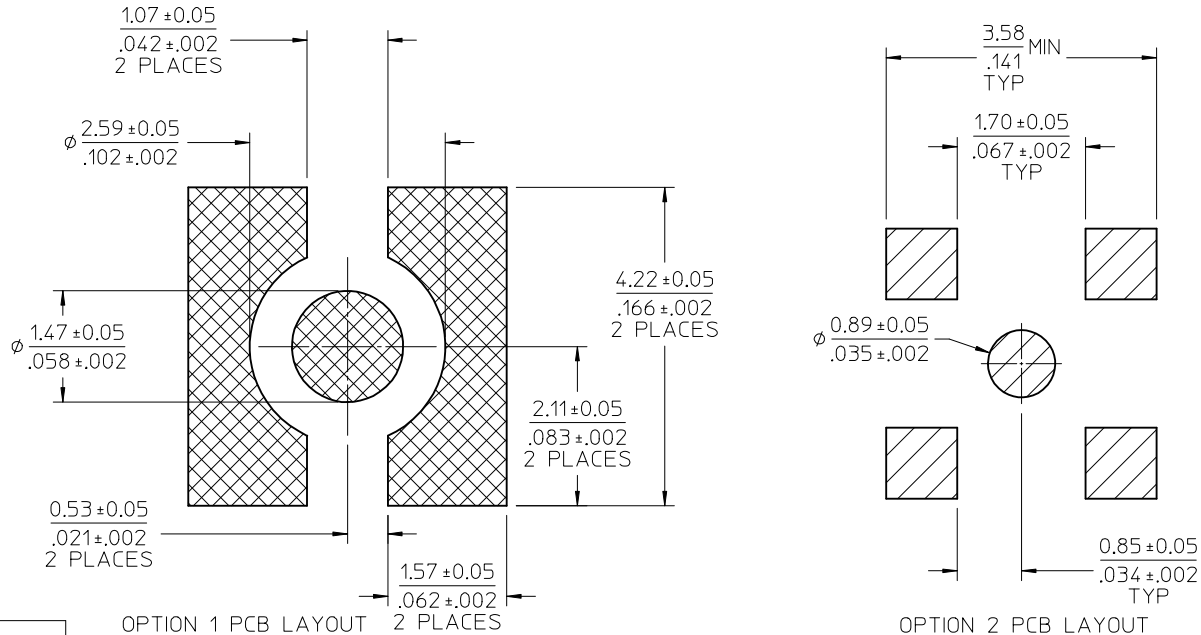

73415-2064	73415-2061. ONE PER BAG
73415-2063	73415-2061 WITH TAPE & REEL
73415-2062	73415-2060 WITH TAPE & REEL
73415-2061	PER COMMERICAL REQUIREMENTS, PACKING TRAY
73415-2060	PER MILITARY REQUIREMENTS, PACKING TRAY
PART NO.	PLATING

OPTION 1 PCB LAYOUT

OPTION 2 PCB LAYOUT

CHG:73415-2060-2061
PACKING UPDATE TO
TRAY
EWR RF15-E384

EC NO: URF2016-0367
DRWN:YCHENG 2015/11/05
CHKD:
APPR:YCHENG 2015/11/09



QUALITY
SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES	± .005
3 PLACES	± .005
2 PLACES	± .005
1 PLACE	± .005
0 PLACE	± .005
ANGULAR ± 2 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	


DIMENSION STYLE MM/IN	
DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE
MATERIAL NO.	DOCUMENT NO.
SEE TABLE	

SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
MMCX JACK, VERTICAL PCB/SMT 50 OHMS MMCX-J/PCB		
molex		
SD-73415-206		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

SHEET NO.
1 OF 4

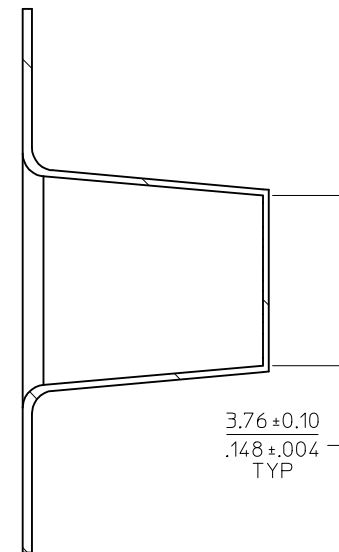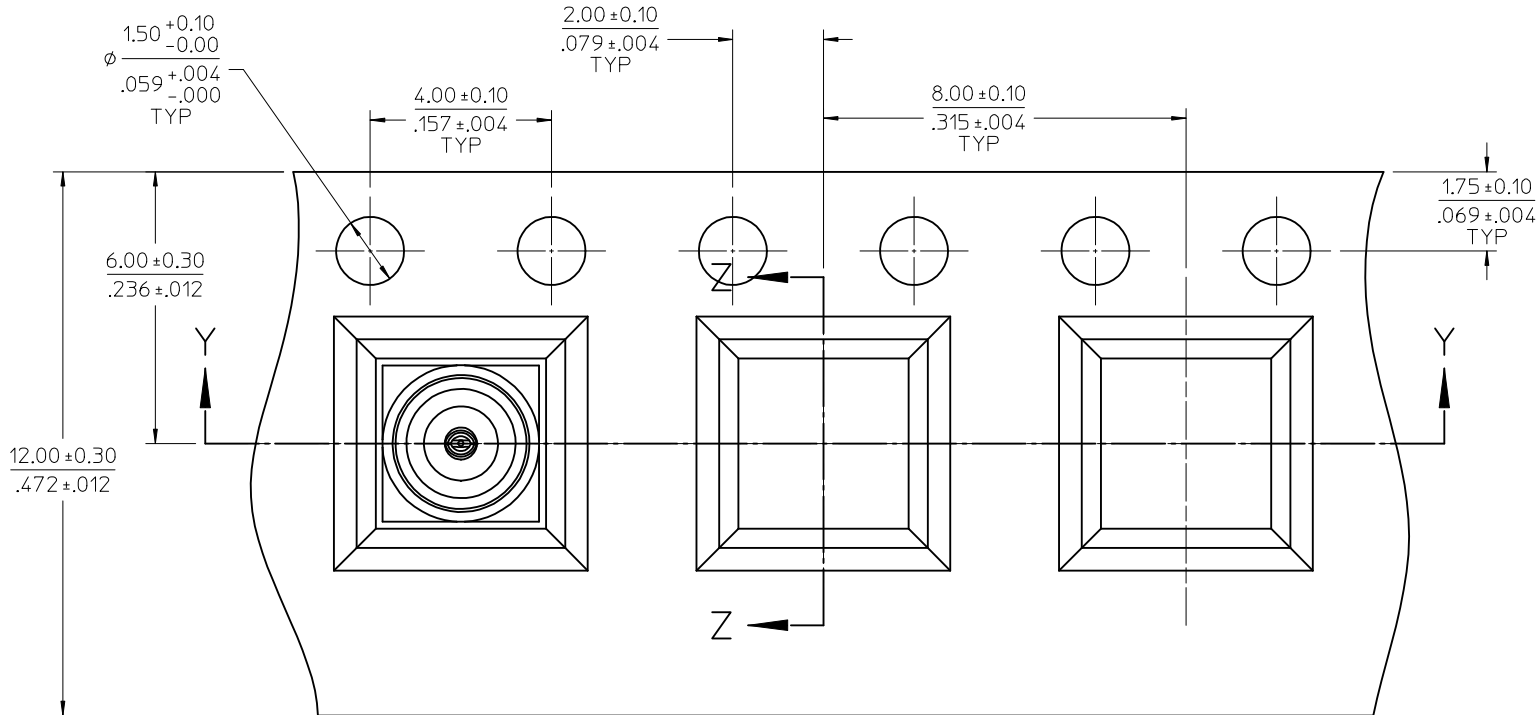

SECTION Z-Z

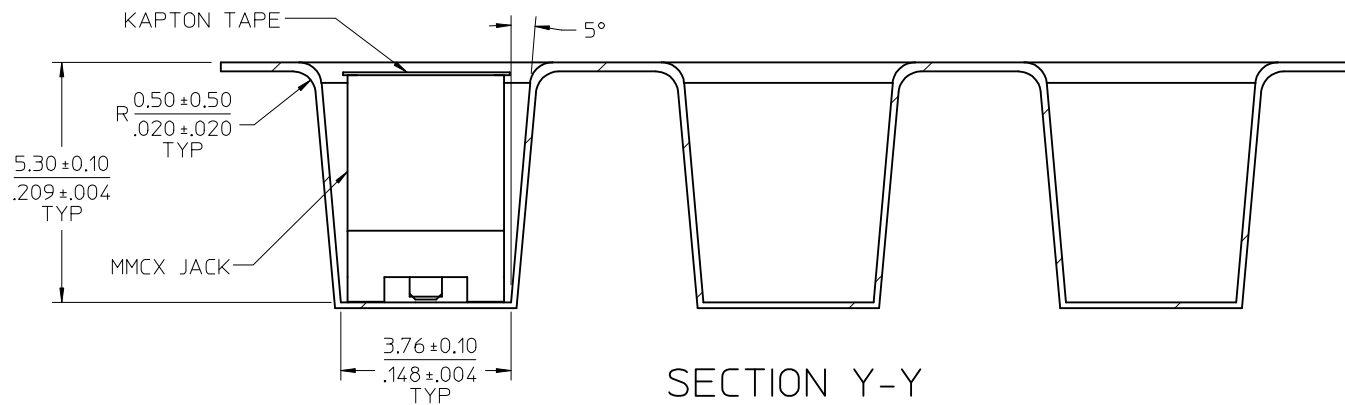

SECTION Y-Y

SEE SHEET 1
EC NO: URF2016-0367
DRWN: YCHENG
CHKD:
APPR: YCHENG

2015/11/05
2015/11/09
DESCRIPTION
REV

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±

ANGULAR ± 2 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
TEF	2000/04/18
CHECKED BY	DATE
SSS	2000/04/18
APPROVED BY	DATE
GMH	2000/04/18

SCALE
DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION


TITLE
MMCX JACK, VERTICAL
PCB/SMT 50 OHMS
MMCX-J/PCB

DOCUMENT NO.
SD-73415-206

SHEET NO.
2 OF 4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

NOTE:
13" REEL SIZE FOR 1600 PIECES

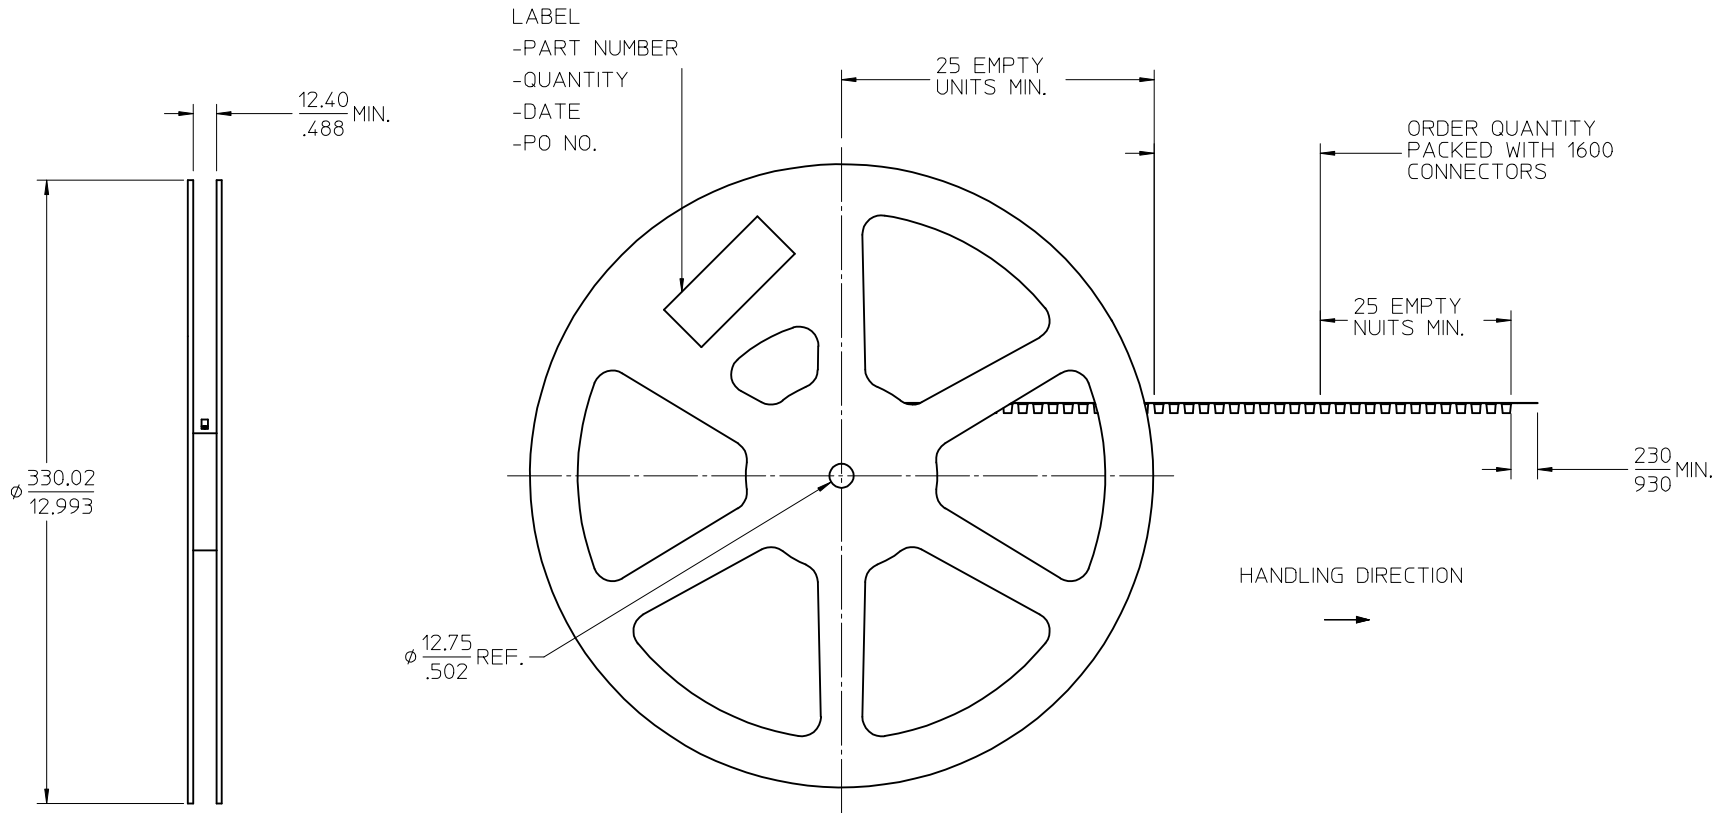




SEE SHEET 1
EC NO: URF2016-0367
2015/11/05
DRAWN: YCHENG
CHKD:
APPR: YCHENG
2015/11/09

REV	DESCRIPTION
B	QUALITY SYMBOLS
	= 0
	= 0
	= 0


GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± .005	± .0002
3 PLACES	± .005	± .0002
2 PLACES	± .005	± .0002
1 PLACE	± .005	± .0002
0 PLACE	± .005	± .0002
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM/IN	
DRAWN BY	DATE
TEF	2000/04/18
CHECKED BY	DATE
SSS	2000/04/18
APPROVED BY	DATE
GMH	2000/04/18
MATERIAL NO.	
SEE SHEET 1	

SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE		
MMCX JACK, VERTICAL PCB/SMT 50 OHMS MMCX-J/PCB		
molex		
DOCUMENT NO.		SHEET NO.
SD-73415-206		3 OF 4
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

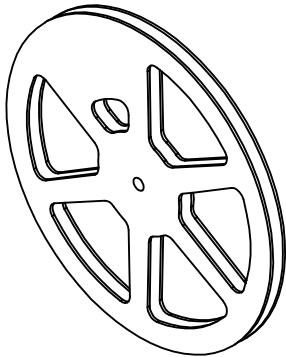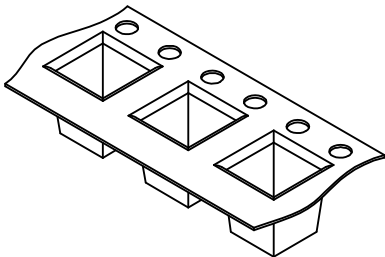

1600 SET PER 13" REEL

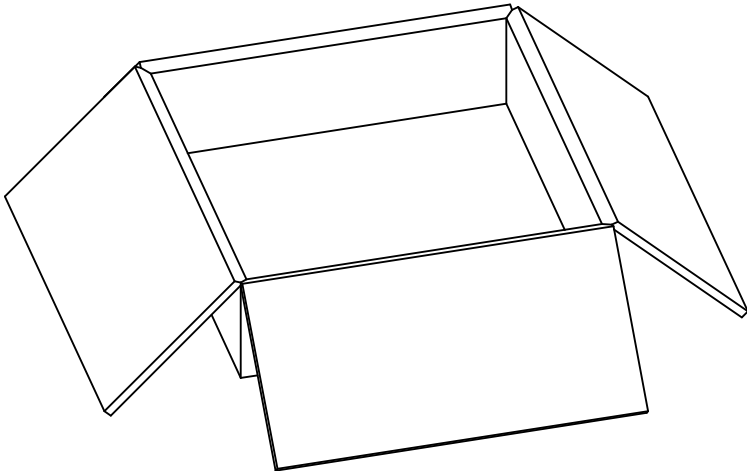

8000 CONNECTORS PER
OUTER CARTON BOX
339 X 339 X 100 REF.

PART NO.
73415-2062/73415-2063

SEE SHEET 1 EC NO: URF2016-0367 DRWN:YCHENG 2015/11/05 CHKD: APPR:YCHENG 2015/11/09 B	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
					MM/IN			METRIC	
				mm	INCH	DRAWN BY	DATE	TITLE	
			4 PLACES	± ---	± ---	TEF	2000/04/18		
			3 PLACES	± ---	± ---	CHECKED BY	DATE	MMCX JACK, VERTICAL PCB/SMT 50 OHMS MMCX-J/PCB	
			2 PLACES	± ---	± ---	SSS	2000/04/18		
			1 PLACE	± ---	± ---	APPROVED BY	DATE		
			0 PLACE	±	±	GMH	2000/04/18		
			ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1		SD-73415-206		4 OF 4
SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									