

品名 NAME:Female

ITEM No. :

版次	記述 DESCRIPTION	DATE	核可
1	修改公差	106.09.27	ANDY
2	尺寸修改	109/04/30	KEN

1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS

INSULATED COLOR: RED


INSULATED COLOR:BLUE

INSULATED COLOR: YELLOW

TOLERANCE: ± 0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.		NEMA TAB	B	F ±0.30	L ±1.00	E	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	B		0.5x2.8	3.2±0.30	6.4	18.5	10.0	4.0	1.7	0.25
	B	ST-001/R	0.8x2.8	3.2±0.30	6.4	18.5				0.25
	A		0.5x4.8	5.0±0.20	6.5	19.0				0.35
	A		0.8x4.8	5.0±0.20	6.5	19.0				0.35
	A		0.8x6.4	6.6±0.20	7.9	21.0				0.4
	A		0.8x8.0	8.4±0.20	10.0	24.0				0.4
16-14 AWG 1.5-2.5 mm ²	B		0.5x2.8	3.2±0.30	6.4	18.5	10.0	4.5	2.3	0.25
	B		0.8x2.8	3.2±0.30	6.4	18.5				0.25
	A		0.5x4.8	5.0±0.20	6.5	19.0				0.35
	A		0.8x4.8	5.0±0.20	6.5	19.0				0.35
	A		0.8x6.4	6.6±0.20	7.9	21.0				0.4
	A		0.8x8.0	8.4±0.20	10.0	24.0				0.4
	A		1.2x9.5	9.9±0.20	12.5	26.0				0.5
12-10 AWG 4-6 mm ²	A		0.8x6.4	6.6±0.20	7.9	24.0	13.0	5.5	3.4	0.4
	A		1.2x9.5	9.9±0.20	12.5	29.0				0.5

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

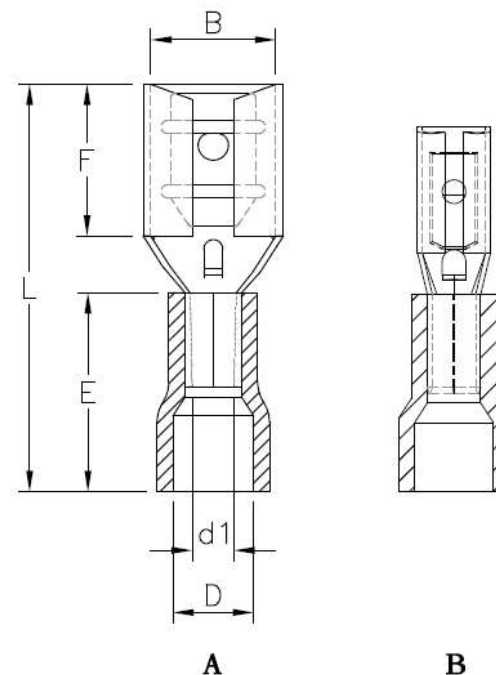

認可 APPROVALS

第三視角
THIRD VIEW

MATERIAL

單位UNIT

製圖 DRAFT: TINA

The diagram shows the orthographic projection of a cone. On the left is the top view, which consists of two concentric circles. The outer circle represents the base of the cone, and the inner circle represents the top surface. A vertical red line and a horizontal red line intersect at the center of the circles. To the right of the top view is the front view, which is a trapezoid. The top horizontal edge of the trapezoid represents the top surface of the cone, and the bottom horizontal edge represents the base. The two slanted sides represent the cone's profile. A horizontal red line passes through the center of the trapezoid, representing the axis of symmetry.

INSULATION: VINYL

m/m

設計 DESIGN: KEN

MATERIAL: BRASS

比例SCALE

核可 CHECKED: KEN

TIN PLATING

日期 DATE: 2015. 01. 05