












D-Cut 方向 ↑

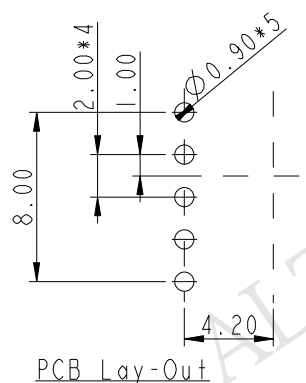

Pin Assignments
Front View



Recommended
Panel Cut-Out

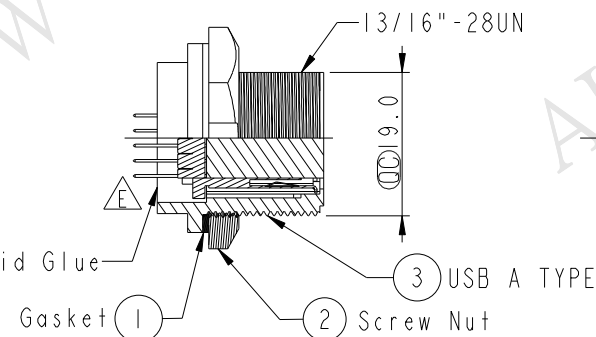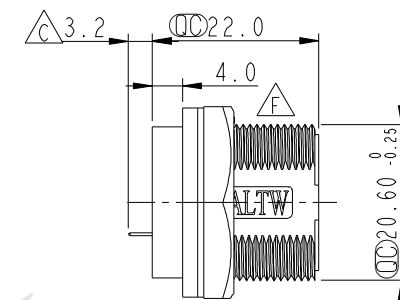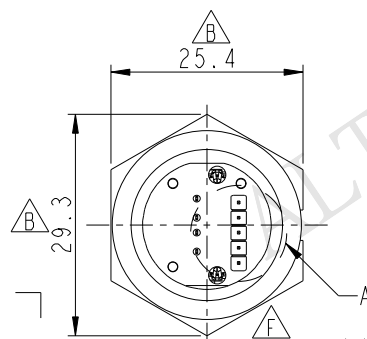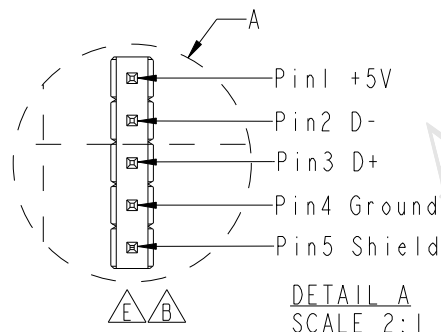

Note:

- * Important Dimensions.
- * Waterproof Rate: IP68
- * USB A: Female PCB Type, Gold Plated
- * Use with waterproof cap or dust cap For Panel Thickness Max: 2.8mm
- * Use without waterproof cap or dust cap For Panel Thickness Max: 4.0mm

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE USB, Panel Screw M Conn. F Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. F	WC-REV. A.5	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO UA-20PMFP-SC8001	DRAWN BY Jinhai	DATE 2014-12-05
DWG NO UA-20PMFP-SC8001	CHECKED BY Tom	DATE 2014-12-05
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2014-12-05

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[LTWUA-20PMFP-SC8001](#) [UA-20PMFP-SC8001](#)