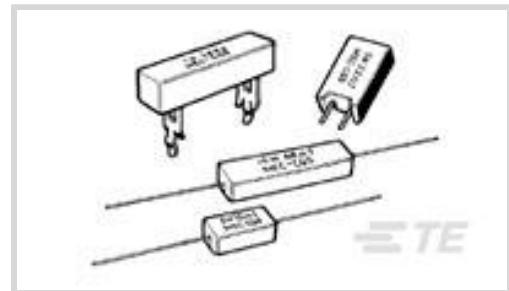


Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Horizontal Mount

Resistor Type: **Power Resistor**Element Type: **Wire Wound**Power Rating: **40 W**Resistance Class: **Up to 1k Ω** Resistance Value: **1.5 Ω** [All Wirewound Resistor: Horizontal Mount \(157\)](#)

Features

Product Type Features

Resistor Type	Power Resistor
Element Type	Wire Wound

Configuration Features

Number of Resistors	1
---------------------	---

Electrical Characteristics

Power Rating	40 W
Resistance Class	Up to 1k Ω
Resistance Value	1.5 Ω
Passive Component Tolerance	5 %

Body Features

Lead Type	Radial-Leaded FASTON
-----------	----------------------

Termination Features

Number of Terminations	2
------------------------	---

Dimensions

Passive Component Dimensions	10.5 x 8 x 18 mm
------------------------------	------------------

Usage Conditions

Temperature Coefficient	±300 ppm/°C
-------------------------	-------------

Packaging Features

Packaging Method	Loose Piece - Box
------------------	-------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

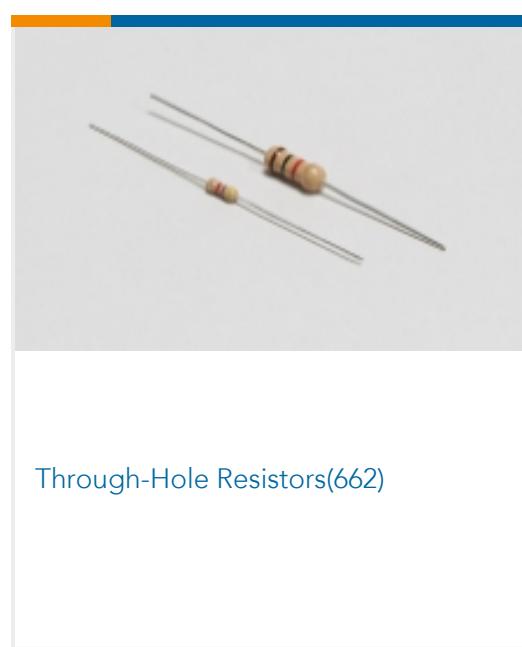
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



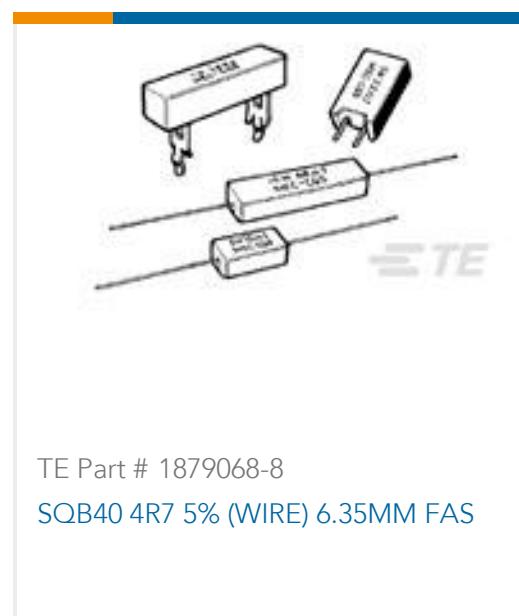
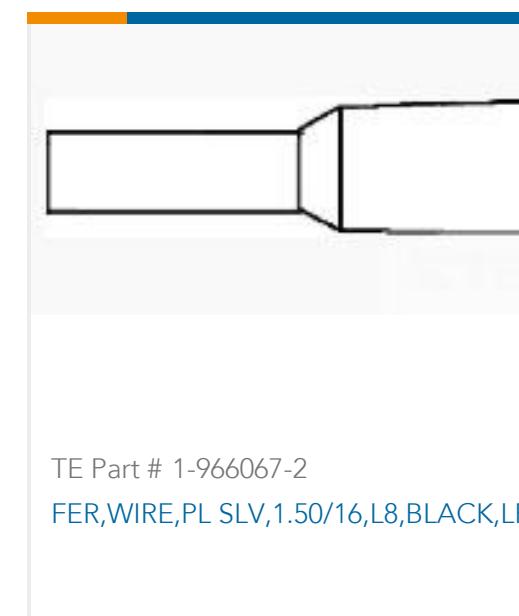
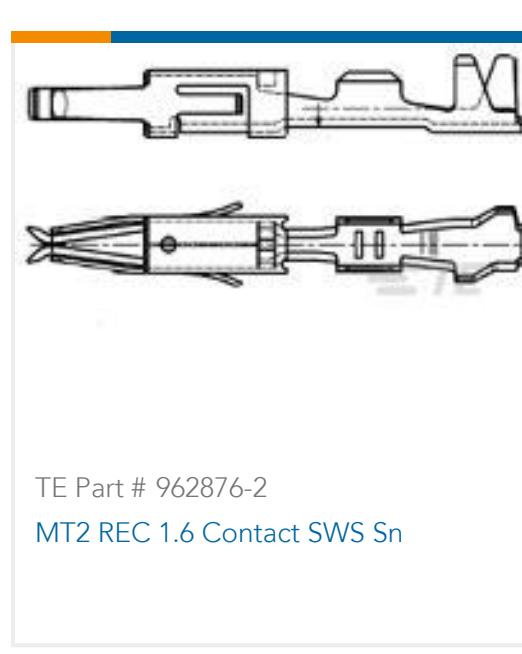
TE Part # CAT-C339-SQ1
Wirewound Resistor: Vertical Mount

Also in the Series | CGS SQ



Through-Hole Resistors(662)

Customers Also Bought

TE Part # 6437288-2
SUPER SEAL 34POS CAP ASSYTE Part # 1879068-8
SQB40 4R7 5% (WIRE) 6.35MM FASTE Part # 35187
SPLICE,SOLIS PARA 2TE Part # 1-966067-2
FER,WIRE,PL SLV,1.50/16,L8,BLACK,LPTE Part # 165171
P.G. WIRE PIN 16-14TE Part # 963530-1
EINZELLEITERDICHTNGTE Part # 1623927-2
CFR16 5% 100RTE Part # 284716-4
6 P. REC CONN X UEGO CONNTE Part # 962876-2
MT2 REC 1.6 Contact SWS Sn

Documents

Product Drawings

SQB40 1R5 5% (WIRE) 6.35MM FAS

English

Datasheets & Catalog Pages

4-1773460-6_RESISTIVE_SOLUTIONS_RAIL

English

1309350_PASSIVE_COMPONENT

SQBW401R5JFASTON

Power Resistor, Wire Wound, 40 W, 1.5 Ω , 5 %, ± 300 ppm/ $^{\circ}$ C, Radial-Leaded
FASTON, 10.5 x 8 x 18 mm, Loose Piece - Box, 2 Termination, CGS SQ



English

[8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS_FOR_ELEVATORS_AND_ESCALATORS](#)

English