

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay



2963970

<https://www.phoenixcontact.com/us/products/2963970>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe coupling relay with force-guided contacts, 5 N/O contacts, 2 N/C contacts, 1-channel, width: 22.5 mm, pluggable Push-in terminal block

Your advantages

- Suitable up to category 1, PL c (EN ISO 13849-1), SIL 1 (EN IEC 62061), SIL 1 (IEC 61508)
- Safe readback due to force-guided signal contact in accordance with EN 50205
- Easy proof test according to IEC 61508 thanks to integrated signal contact
- 1 or 2-channel control
- 5 enabling current paths, 2 confirmation current paths

Commercial data

Item number	2963970
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA162
Catalog page	Page 245 (C-6-2019)
GTIN	4017918904791
Weight per piece (including packing)	181 g
Weight per piece (excluding packing)	148 g
Customs tariff number	85364900
Country of origin	DE

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay



2963970

<https://www.phoenixcontact.com/us/products/2963970>

Technical data

Product properties

Product type	Coupling relay
Product family	PSRclassic
Application	Safe switch off
	High demand
	Low demand
Mechanical service life	10x 10 ⁶ cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

Times

Restart time	< 1 s (Boot time)
--------------	-------------------

Electrical properties

Maximum power dissipation for nominal condition	8.56 W (at U _B = 26.4 V DC, U _S = 24 V, I _S = 47 mA, n = 1, I _L ² = 72 A ² , R _{contact} = 0.1 Ω _{IEC 60947})
Nominal operating mode	100% operating factor

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V
	250 V
Rated surge voltage/insulation	Safe isolation 4 kV between all current paths and housing

Input data

General

Rated control circuit supply voltage U _S	24 V AC/DC -15 % / +10 %
Power consumption at U _S	typ. 1.2 W
Rated control supply current I _S	typ. 47 mA
Input voltage range	20.4 V AC/DC ... 26.4 V AC/DC
Inrush current	typ. 350 mA DC ($\Delta t < 1 \mu\text{s}$ at U _s) typ. 350 mA AC ($\Delta t = 2 \text{ ms}$ at U _s)
Typ. starting time with U _s	typ. 20 ms (when controlled via A1)
Typical release time	typ. 20 ms (when controlled via A1)
Recovery time	< 500 ms
Maximum switching frequency	0.5 Hz
Protective circuit	Surge protection; Varistor
Operating voltage display	1 x green LED

Output data

Contact switching type	5 enabling current paths
	2 confirmation current paths
Contact material	AgSnO ₂

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay

2963970

<https://www.phoenixcontact.com/us/products/2963970>



Maximum switching voltage	230 V AC/DC (Observe the load curve)
Minimum switching voltage	5 V AC/DC
Limiting continuous current	6 A (N/O contact) 3 A (N/C contact)
Maximum inrush current	6 A
Inrush current, minimum	10 mA
Sq. Total current	72 A ²
Interrupting rating (ohmic load) max.	144 W (N/O contact, 24 V DC, $\tau = 0$ ms) 288 W (N/O contact, 48 V DC, $\tau = 0$ ms) 240 W (N/O contact, 60 V DC, $\tau = 0$ ms) 110 W (N/O contact, 110 V DC, $\tau = 0$ ms) 88 W (N/O contact, 220 V DC, $\tau = 0$ ms) 1380 VA (N/O contact, 230 V AC, $\tau = 0$ ms)
Maximum interrupting rating (inductive load)	42 W (N/O contact, 24 V DC, $\tau = 40$ ms) 42 W (N/O contact, 48 V DC, $\tau = 40$ ms) 42 W (N/O contact, 60 V DC, $\tau = 40$ ms) 42 W (N/O contact, 110 V DC, $\tau = 40$ ms) 42 W (N/O contact, 220 V DC, $\tau = 40$ ms)
Switching capacity	min. 50 mW
Switching capacity in accordance with IEC 60947-5-1	3 A (24 V (DC13)) 3 A (230 V (AC15))
Switching capacity (360/h cycles)	4 A (24 V (DC13)) 4 A (230 V (AC15))
Output fuse	10 A gL/gG (N/O contact) 4 A gL/gG (N/O contact, for low-demand applications) 6 A gL/gG (N/C contact)

Connection data

Connection technology	
pluggable	yes
Conductor connection	
Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ² (only together with CRIMPFOX 6)
Conductor cross-section AWG	24 ... 16
Stripping length	8 mm
Tightening torque	0.6 Nm

Dimensions

Width	22.5 mm
-------	---------

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay

2963970

<https://www.phoenixcontact.com/us/products/2963970>



Height	114.5 mm
Depth	112 mm

Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide

Characteristics

Safety data	
Stop category	0

Safety data: EN ISO 13849	
Category	1
Performance level (PL)	c

Safety data: IEC 61508 - High demand	
Safety Integrity Level (SIL)	1

Safety data: IEC 61508 - Low demand	
Safety Integrity Level (SIL)	1

Safety data	
Safety Integrity Level (SIL)	1

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-20 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	max. 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g (In the event of stress caused by shock, contact reactions are possible for up to 2 ms.)
Vibration (operation)	10 Hz ... 150 Hz, 2g (In the event of stress caused by vibration, contact reactions are possible for up to 1 ms.)

Approvals

CE	
Certificate	CE-compliant

Standards and regulations

Air clearances and creepage distances between the power circuits	
Standards/regulations	DIN EN 50178

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay

2963970

<https://www.phoenixcontact.com/us/products/2963970>



Mounting

Mounting type	DIN rail mounting
Mounting position	any

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay




2963970

<https://www.phoenixcontact.com/us/products/2963970>


Drawings

Block diagram

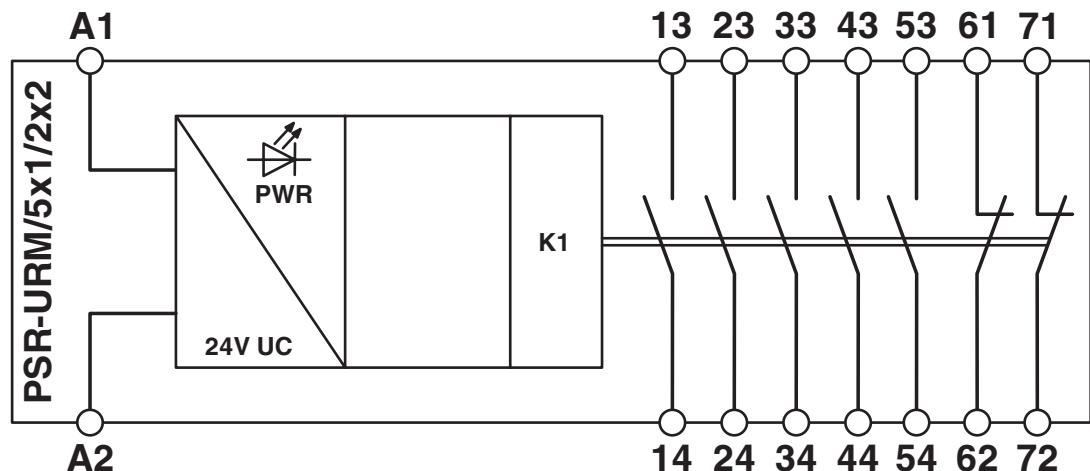

Block diagram

Application drawing

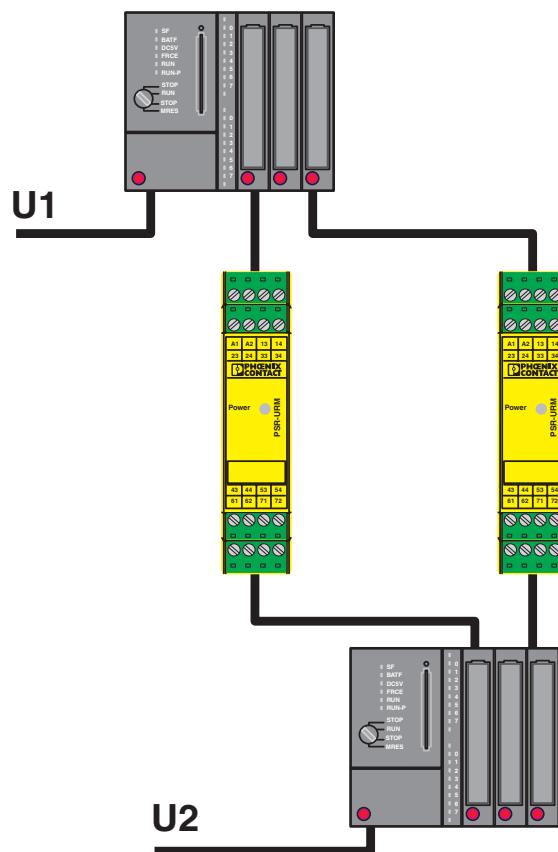

Reliable signal exchange between two systems with confirmation function.

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2963970>



EAC

Approval ID: TR_TS_D_00573_c



UL Listed

Approval ID: FILE E 140324



cUL Listed

Approval ID: FILE E 140324



Functional Safety

Approval ID: 44-780-15124312



Functional Safety

Approval ID: 44-205-15124312

cULus Listed

Classifications

ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

ETIM

ETIM 9.0	EC001449
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-l

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	e7f53381-e4de-4980-9f18-f5892eb18940

PSR-SPP- 24UC/URM/5X1/2X2 - Coupling relay

2963970

<https://www.phoenixcontact.com/us/products/2963970>



Accessories

CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 6.0 mm², lateral entry, trapezoidal crimp

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com