

# PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e in accordance with EN ISO 13849, single- or two-channel operation, 8 enabling current paths,  $U_S = 24$  V DC, pluggable Push-in terminal block

## Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Manually monitored and automatic activation in a single device
- 1- and 2-channel control
- 8 enabling current paths, 1 signaling current path

## Commercial data

Item number	2963996
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA114
Catalog page	Page 229 (C-6-2019)
GTIN	4017918904814
Weight per piece (including packing)	420.34 g
Weight per piece (excluding packing)	334.92 g
Customs tariff number	85371098
Country of origin	DE

## Technical data

### Product properties

Product type	Safety relays
Product family	PSRclassic
Application	Emergency stop
	Safety door
Mechanical service life	approx. $10^7$ cycles
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

### Electrical properties

Maximum power dissipation for nominal condition	31.7 W ( $U_S = 26.4$ V, $I_L^2 = 144$ A $^2$ , $P_{\text{Total max}} = 2.9$ W + 28.8 W)
Nominal operating mode	100% operating factor

#### Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V
Rated surge voltage/insulation	Basic insulation 4 kV: between all current paths and housing Safe isolation, reinforced insulation 6 kV: between A1/A2 and 63/64, 73/74, 83/84 between S10/S11/S12/S33/S34/S35 and 63/64, 73/74, 83/84 between 63/64, 73/74, 83/84 among one another

### Input data

#### General

Rated control circuit supply voltage $U_S$	24 V DC -15 % / +10 %
Power consumption at $U_S$	typ. 2.4 W (DC)
Rated control supply current $I_S$	typ. 100 mA DC (at $U_S$ )
Inrush current	3.5 A ( $\Delta t = 2$ ms at $U_S$ ) max. 150 mA ( $\Delta t = 1$ ms, with $U_S/I_x$ at S10) max. 200 mA ( $\Delta t = 1$ ms, with $U_S/I_x$ at S12) max. -180 mA ( $\Delta t = 1$ ms, with $U_S/I_x$ at S22) < 10 mA (with $U_S/I_x$ to S34) < 10 mA (with $U_S/I_x$ to S35)
Current consumption	50 mA (with $U_S/I_x$ to S10) 50 mA (with $U_S/I_x$ to S12) -50 mA (with $U_S/I_x$ to S22) 0 mA (with $U_S/I_x$ to S34) 1 mA (with $U_S/I_x$ to S35)
Voltage at input/start and feedback circuit	24 V DC -15 % / +10 %
Filter time	2 ms (at A1 in the event of voltage dips at $U_S$ ) max. 1.5 ms (at S10, S12; test pulse width) 7.5 ms (at S10, S12; test pulse rate) Test pulse rate = 5 x Test pulse width

# PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays

2963996

<https://www.phoenixcontact.com/us/products/2963996>



Typical response time	< 120 ms (automatic start) < 140 ms (manual start)
Typ. starting time with $U_s$	< 200 ms (when controlled via A1)
Typical release time	< 20 ms (when controlled via S11/S12 and S21/S22) < 50 ms (when controlled via A1)
Concurrence	$\infty$
Recovery time	< 500 ms (following demand of the safety function) < 1 s (Boot time)
Maximum switching frequency	0.5 Hz
Protective circuit	Surge protection; Suppressor diode
Max. permissible overall conductor resistance	11 $\Omega$ (Input sensor circuit S10,S12,S22) 50 $\Omega$ (S34,S35 start circuit input)
Operating voltage display	1 x green LED
Status display	2 x green LEDs

## Output data

Contact switching type	8 enabling current paths 1 signaling current path
Contact material	AgSnO <sub>2</sub>
Maximum switching voltage	250 V AC
Minimum switching voltage	5 V AC/DC
Limiting continuous current	6 A
Maximum inrush current	6 A
Inrush current, minimum	10 mA
Sq. Total current	144 A <sup>2</sup> (Enabling current paths) 36 A <sup>2</sup> (Signaling current path)
Switching capacity min.	50 mW
Switching capacity in accordance with IEC 60947-5-1	5 A (DC13) 3 A (AC15) 0.5 A (AC15)
Output fuse	10 A gL/gG (Enabling current paths) 6 A gL/gG (Signaling current path)

## Connection data

Connection technology	
pluggable	yes
Conductor connection	
Connection method	Push-in connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6)

# PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays

2963996

<https://www.phoenixcontact.com/us/products/2963996>



Conductor cross-section AWG	24 ... 16
Stripping length	8 mm

## Dimensions

Width	45 mm
Height	112 mm
Depth	114.5 mm

## Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide

## Characteristics

Safety data	
Stop category	0

Safety data: EN ISO 13849	
Category	4
Performance level (PL)	e (3 A DC13; 3 A AC15; 8760 switching cycles/year)

Safety data: IEC 61508 - High demand	
Safety Integrity Level (SIL)	3

Safety data: IEC 61508 - Low demand	
Safety Integrity Level (SIL)	3

Safety data: EN IEC 62061	
Safety Integrity Level (SIL)	3

## Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-20 °C ... 55 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

## Approvals

CE	
Certificate	CE-compliant

## Standards and regulations


Air clearances and creepage distances between the power circuits

Standards/regulations	DIN EN 60947-1
-----------------------	----------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

## Drawings

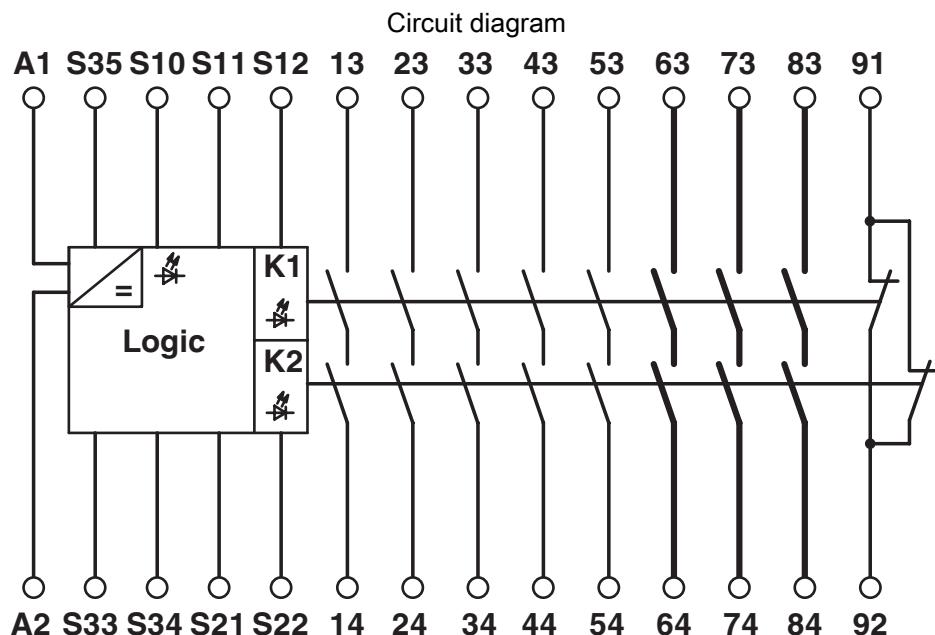

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2963996>



**EAC**

Approval ID: TR\_TS\_D\_00573\_c



**UL Listed**

Approval ID: FILE E 140324



**cUL Listed**

Approval ID: FILE E 140324



**Functional Safety**

Approval ID: 01/205/5363.03/22



**Functional Safety**

Approval ID: 968/EZ 622.03/22

**cULus Listed**

## Classifications

### ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819

### ETIM

ETIM 9.0	EC001449
----------	----------

### UNSPSC

UNSPSC 21.0	39122200
-------------	----------

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	01173c64-6e5f-4621-878f-998922d82156

2963996

<https://www.phoenixcontact.com/us/products/2963996>

## Accessories

### CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/us/products/1734634>

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



---

### CR-MSTB - Coding section

1734401

<https://www.phoenixcontact.com/us/products/1734401>

Coding section, inserted into the recess in the header or the inverted plug, red insulating material



# PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

## CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>

Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp



## PSR-ESS-M0-H110 - Actuator

1221757

<https://www.phoenixcontact.com/us/products/1221757>

Actuator with anti-lock collar for modular emergency stop switches, for combination with module holder and contact module as a functional unit, panel installation, bayonet lock



# PSR-SPP-24UC/ESAM4/8X1/1X2 - Safety relays



2963996

<https://www.phoenixcontact.com/us/products/2963996>

## PSR-ESS-ACC-CB1-C3 - Module holder

1221747

<https://www.phoenixcontact.com/us/products/1221747>



Module holder for modular emergency stop switches, connects the contact block and actuator with bayonet lock, suitable for 3 elements

## PSR-ESS-ACC-CB1-NC-SC - Contact module

1221752

<https://www.phoenixcontact.com/us/products/1221752>



Contact module for modular emergency stop switches with force-guided N/C contact for safety-related shutdown, in conjunction with appropriate evaluation unit suitable for use up to PL e (EN ISO 13849-1), SIL 3 (EN IEC 62061)

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)