

NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, PVC/PVC, green RAL 6018, shielded (Advanced Shielding Technology), Plug straight M12, coding: D / IP67, on Plug straight M12, coding: D / IP67, cable length: 10 m

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 1407527 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | BF04 |
| Product key | BF1CJN |
| Catalog page | Page 198 (C-6-2019) |
| GTIN | 4046356778329 |
| Weight per piece (including packing) | 685 g |
| Weight per piece (excluding packing) | 657.3 g |
| Customs tariff number | 85444290 |
| Country of origin | PL |

Technical data

Notes

| | |
|---------|--|
| General | This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 10.1 Cord Sets for Balanced Cabling |
| General | Further products with variable cable type and variable cable length can be found in the accessories section |

Product properties

| | |
|----------------------|-------------------------|
| Product type | Data cable preassembled |
| Application | Standard |
| Sensor type | PROFINET |
| Number of positions | 4 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | D |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Interfaces

| | |
|----------------------|--------------------------------------|
| Bus system | PROFINET |
| Signal type/category | PROFINET CAT5 (IEC 11801), 100 Mbps |
| | EtherCAT® CAT5 (IEC 11801), 100 Mbps |

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Electrical properties

| | |
|---|-----------------------|
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |
| Transmission medium | Copper |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002) |

Material specifications

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Connector

| |
|--------------|
| Connection 1 |
|--------------|


NBC-M12MSD/10,0-93B/M12MSD - Network cable

1407527

<https://www.phoenixcontact.com/us/products/1407527>



Dimensional drawing




Pin assignment M12 male connector, 4-pos., D-coded, male side

| | |
|--|---|
| Type | M12 Plug, straight, 4-position, shielded (Advanced Shielding Technology), Keying: D |
| Number of positions | 4 |
| Shielded | yes |
| Shielding | Advanced Shielding Technology |
| Signal type/category | EtherCAT® CAT5 (IEC 11801), 100 Mbps PROFINET CAT5 (IEC 11801) |
| Insertion/withdrawal cycles | ≥ 100 |
| Insulation resistance | ≥ 100 MΩ |
| Overshoot category | II |
| Degree of pollution | 3 |
| Tightening torque | 0.4 Nm |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 |
| Material for screw connection | Zinc die-cast, nickel-plated |
| Seal material | FKM |
| Flammability rating according to UL 94 | V0 |
| Degree of protection | IP65 IP67 |
| Ambient temperature (operation) | -25 °C ... 85 °C |
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |

Connection 2

Dimensional drawing



Pin assignment M12 male connector, 4-pos., D-coded, male side

| | |
|----------------------|---|
| Type | M12 Plug, straight, 4-position, shielded (Advanced Shielding Technology), Keying: D |
| Number of positions | 4 |
| Shielded | yes |
| Shielding | Advanced Shielding Technology |
| Signal type/category | EtherCAT® CAT5 (IEC 11801), 100 Mbps |

NBC-M12MSD/10,0-93B/M12MSD - Network cable

1407527

<https://www.phoenixcontact.com/us/products/1407527>



| | |
|--|------------------------------|
| | PROFINET CAT5 (IEC 11801) |
| Insertion/withdrawal cycles | ≥ 100 |
| Insulation resistance | ≥ 100 MΩ |
| Overtoltage category | II |
| Degree of pollution | 3 |
| Tightening torque | 0.4 Nm |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 |
| Material for screw connection | Zinc die-cast, nickel-plated |
| Seal material | FKM |
| Flammability rating according to UL 94 | V0 |
| Degree of protection | IP65 |
| | IP67 |
| Ambient temperature (operation) | -25 °C ... 85 °C |
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |

Cable/line

| | |
|--------------|------|
| Cable length | 10 m |
|--------------|------|

PROFINET PVC stranded CAT5 [93B]

Dimensional drawing



| | |
|---------------------------------|----------------------------------|
| Cable weight | 67 kg/km |
| UL AWM Style | 21694 |
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PROFINET PVC stranded CAT5 [93B] |
| Conductor structure | 1x4xAWG22/7, SF/TQ |
| Signal runtime | 5.3 ns/m |
| Signal speed | 0.66 c |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Conductor cross section | 4x 0.34 mm ² |
| Wire diameter incl. insulation | 1.55 mm |
| External cable diameter | 6.50 mm ±0.2 mm |
| Outer sheath, material | PVC |

NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

| | |
|---|---|
| External sheath, color | green RAL 6018 |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PE |
| Single wire, color | white, yellow, blue, orange |
| Thickness, outer sheath | approx. 0.90 mm |
| Overall twist | Star quad |
| Optical shield covering | 85 % |
| Insulation resistance | $\geq 500 \text{ M}\Omega\text{-km}$ |
| Coupling resistance | $\leq 20.00 \text{ m}\Omega/\text{m}$ (at 10 MHz) |
| Loop resistance | $\leq 120.00 \Omega/\text{km}$ |
| Wave impedance | $100 \Omega \pm 15 \Omega$ (at 100 MHz) |
| Nominal voltage, cable | 600 V |
| Test voltage Core/Core | 2000 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 2000.00 V (50 Hz, 1 min.) |
| Minimum bending radius, fixed installation | 3 x D |
| Minimum bending radius, flexible installation | 7 x D |
| Smallest bending radius, fixed installation | 20 mm |
| Smallest bending radius, movable installation | 46 mm |
| Near end crosstalk attenuation (NEXT) | 80 dB (with 1 MHz) 76 dB (at 4 MHz) 70 dB (at 10 MHz) 65 dB (at 16 MHz) 63 dB (at 20 MHz) 60 dB (at 31.25 MHz) 55 dB (at 62.5 MHz) 50 dB (at 100 MHz) |
| Shield attenuation | 2.1 dB (with 1 MHz) 4 dB (at 4 MHz) 6.3 dB (at 10 MHz) 8 dB (at 16 MHz) 9 dB (at 20 MHz) 11.4 dB (at 31.25 MHz) 16.5 dB (at 62.5 MHz) 21.3 dB (at 100 MHz) |
| Flame resistance | according to UL 1685 (CSA FT 4) |
| Resistance to oil | Resistant to oil to a limited extent |
| Other resistance | UV resistant (According to UL 1581, Section 1200) |
| Ambient temperature (operation) | -40 °C ... 70 °C (cable, fixed installation) |
| Ambient temperature (installation) | -40 °C ... 70 °C (Cable, flexible installation) -20 °C ... 60 °C |

Environmental and real-life conditions

Ambient conditions

NBC-M12MSD/10,0-93B/M12MSD - Network cable

1407527

<https://www.phoenixcontact.com/us/products/1407527>




| | |
|----------------------|----------------------|
| Degree of protection | IP65 (M12 connector) |
| | IP67 (M12 connector) |

Standards and regulations

| | |
|--------------------------|-----------------|
| M12 | |
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |


Drawings

Schematic diagram

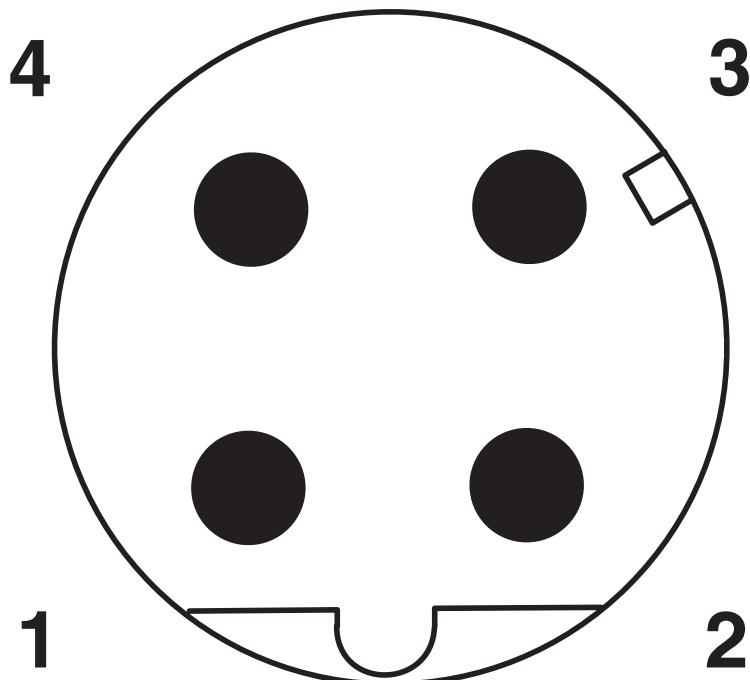

Pin assignment M12 male connector, 4-pos., D-coded, male side

Circuit diagram

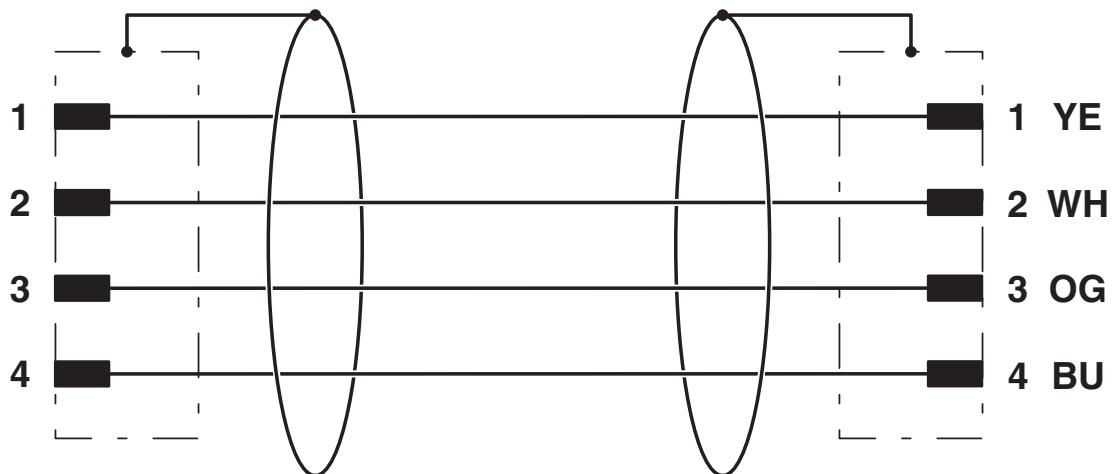


NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

Dimensional drawing

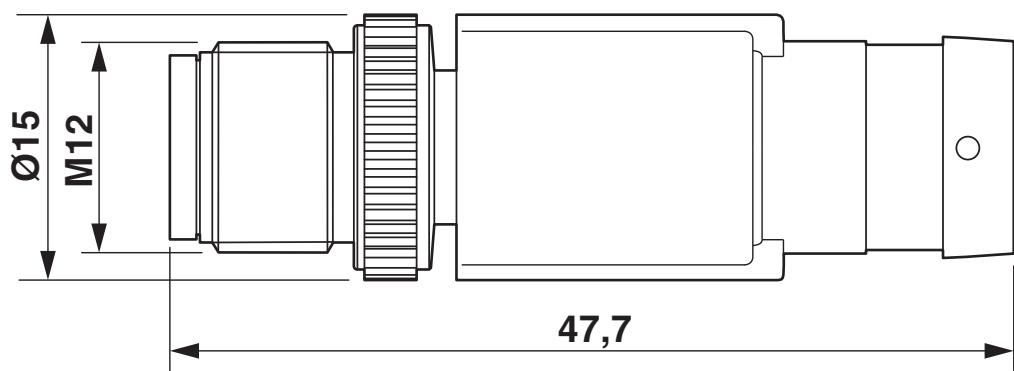

Plug, M12 x 1, straight, shielded

1407527

<https://www.phoenixcontact.com/us/products/1407527>

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1407527>

| UL Listed Approval ID: FILE E 335024 | | | | |
|--|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 250 V | 4 A | - | - |

| cUL Listed Approval ID: FILE E 335024 | | | | |
|---|-----------------------|-----------------------|-------------------|----------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 250 V | 4 A | - | - |

| EAC-RoHS Approval ID: RU D-DE.HB35.B.00387 | | | | |
|--|--|--|--|--|
| cULus Listed | | | | |

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060307 |
| ECLASS-12.0 | 27060307 |
| ECLASS-13.0 | 27060307 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.0 Climate Change

| | |
|---------|---------------|
| CO2e kg | 3.651 kg CO2e |
|---------|---------------|

NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

Accessories

NBC-M12MSD-M12MSD-PN/.../... - Network cable

1408634

<https://www.phoenixcontact.com/us/products/1408634>

Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded (Advanced Shielding Technology), Plug straight M12, coding: D / IP67, on Plug straight M12, coding: D / IP67, cable length: Free input (0.2 ... 40.0 m)



NBC-M12MSD-M12MRD-PN/.../... - Network cable

1408625

<https://www.phoenixcontact.com/us/products/1408625>

Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded (Advanced Shielding Technology), Plug straight M12, coding: D / IP67, on Plug angled M12, coding: D / IP67, cable length: Free input (0.2 ... 40.0 m)



NBC-M12MSD/10,0-93B/M12MSD - Network cable

1407527

<https://www.phoenixcontact.com/us/products/1407527>



NBC-M12MRD-M12MRD-PN/.../... - Network cable

1408624

<https://www.phoenixcontact.com/us/products/1408624>



Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded (Advanced Shielding Technology), Plug angled M12, coding: D / IP67, on Plug angled M12, coding: D / IP67, cable length: Free input (0.2 ... 40.0 m)

NBC-M12MSD-M12FSD-PN/.../... - Network cable

1408617

<https://www.phoenixcontact.com/us/products/1408617>



Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded (Advanced Shielding Technology), Plug straight M12, coding: D / IP67, on Socket straight M12, coding: D / IP67, cable length: Free input (0.2 ... 40.0 m)

NBC-M12MSD/10,0-93B/M12MSD - Network cable

1407527

<https://www.phoenixcontact.com/us/products/1407527>



NBC-M12MSD-M12FRD-PN/.../... - Network cable

1408608

<https://www.phoenixcontact.com/us/products/1408608>

Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded (Advanced Shielding Technology), Plug straight M12, coding: D / IP67, on Socket angled M12, coding: D / IP67, cable length: Free input (0.2 .. . 40.0 m)



NBC-M12MRD-M12FSD-PN/.../... - Network cable

1408616

<https://www.phoenixcontact.com/us/products/1408616>

Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded (Advanced Shielding Technology), Plug angled M12, coding: D / IP67, on Socket straight M12, coding: D / IP67, cable length: Free input (0.2 ... 40.0 m)



NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

NBC-M12MRD-M12FRD-PN/.../... - Network cable

1408607

<https://www.phoenixcontact.com/us/products/1408607>



Network cable, PROFINET CAT5 (100 Mbps), EtherCAT® CAT5 (100 Mbps), 4-position, shielded, Plug angled M12 SPEEDCON, coding: D / IP67, on Socket angled M12 SPEEDCON, coding: D / IP67, cable length: Free input (0.2 ... 40.0 m)

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/us/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/us/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>

Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors



NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>

Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm



TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>

Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits



NBC-M12MSD/10,0-93B/M12MSD - Network cable



1407527

<https://www.phoenixcontact.com/us/products/1407527>

SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com