


PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Base element for protective plug PT with protective circuit for 4 signal wires, with gas-filled surge arrester between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

Your advantages

- Maximum ease of maintenance, thanks to the 2-piece design
- Easy selection for all possible demands in MCR applications with a complete product portfolio
- The signal is not influenced during maintenance work, thanks to the impedance-neutral insertion and removal of protective plugs

Commercial data

Item number	2839376
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	CL21
Product key	CL2111
Catalog page	Page 135 (C-4-2019)
GTIN	4017918182809
Weight per piece (including packing)	57.89 g
Weight per piece (excluding packing)	51.529 g
Customs tariff number	85363010
Country of origin	DE

PT 4X1+F-BE - Surge protection base-element



2839376
<https://www.phoenixcontact.com/us/products/2839376>

Technical data

Notes

Notes on operation	In the base elements PT...+F-BE , the connections 9/10 (GND) are linked to the mounting foot via a gas-filled surge arrester.
--------------------	--

Product properties

Product type	Base element
Product family	PLUGTRAB PT
Type	Base element, DIN rail mounting
Number of positions	4
Surge protection fault message	none

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal voltage U_N	48 V AC
-----------------------	---------

Connection data

Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross section AWG	24 ... 12

Dimensions

Dimensional drawing	
Width	17.7 mm
Height	90 mm
Depth	51.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	1 Div.

Material specifications

Color	black (RAL 9005) Copper
Flammability rating according to UL 94	V-0
Housing material	PA 6.6

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Protective circuit

Direction of action	Signal Ground/Shield-Earth Ground
Maximum continuous voltage U_C	77 V DC
	55 V AC
Rated current	300 mA (45 °C)
Resistance per path	4.7 Ω 10 %
Surge protection fault message	none
Max. required back-up fuse	315 mA (T)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	$\leq$ 2000 m (amsl)

Standards and regulations

Standards/specifications	IEC 61643-21
Note	2000 + corrigendum 2001 + A1:2008, modified + A2:2012
Standards/specifications	EN 61643-21
Note	2001 + A1:2009 + A2:2013

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

PT 4X1+F-BE - Surge protection base-element




2839376


<https://www.phoenixcontact.com/us/products/2839376>

Drawings

Circuit diagram

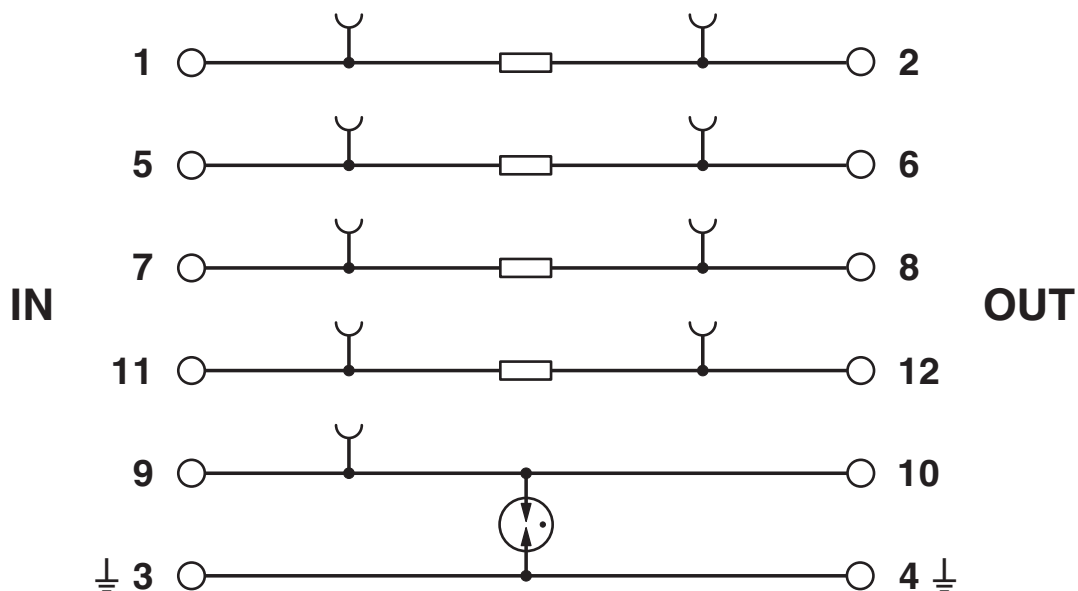


Diagram

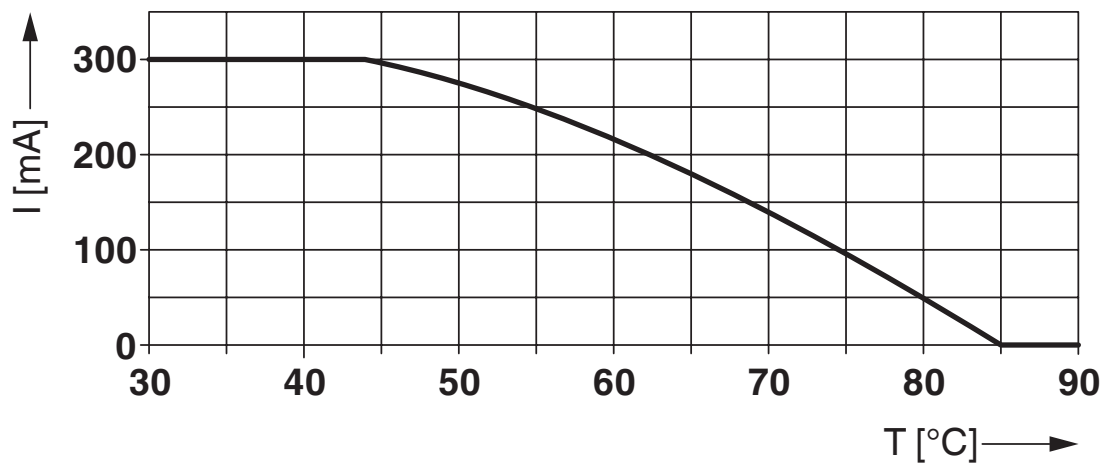

PT 4X1+F-BE - Surge protection base-element

2839376

<https://www.phoenixcontact.com/us/products/2839376>

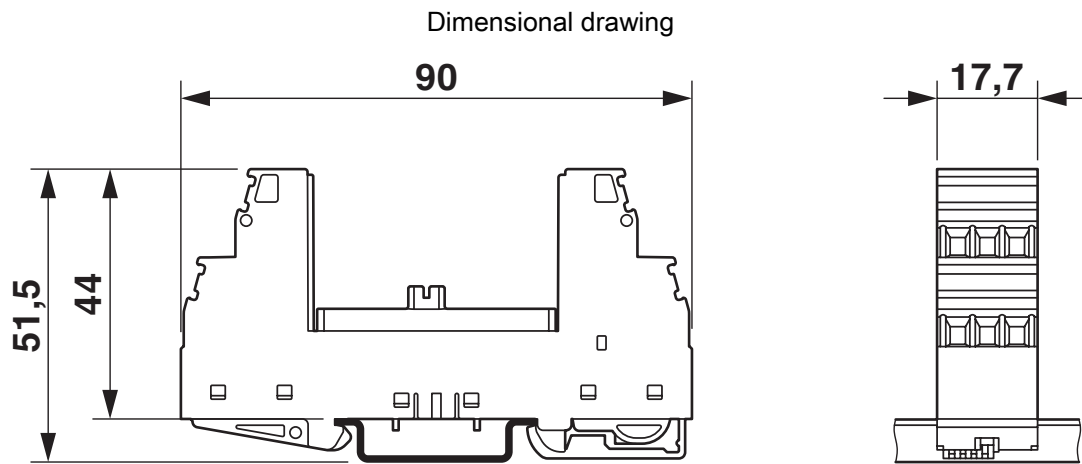

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2839376>



EAC

Approval ID: EAC-Zulassung



DNV GL

Approval ID: TAE00001N6



EAC

Approval ID: RU C-DE.*09.B.00169



UL Listed

Approval ID: FILE E 138168



cUL Listed

Approval ID: FILE E 333250



UL Listed

Approval ID: FILE E 333250

cULus Listed

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

Classifications

ECLASS

ECLASS-11.0	27130803
ECLASS-13.0	27171592

ETIM

ETIM 9.0	EC002497
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

Accessories

SSA 5-10 - Shield connection

2839512

<https://www.phoenixcontact.com/us/products/2839512>



Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable:
200 mm, 1 mm², color: black

SSA 3-6 - Shield connection

2839295

<https://www.phoenixcontact.com/us/products/2839295>



Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable:
200 mm, 1 mm², color: black

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

ZBF 5:UNBEDRUCKT - Zack Marker strip, flat

0808642

<https://www.phoenixcontact.com/us/products/0808642>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm, Number of individual labels: 10

PT 4X1+F-BE - Surge protection base-element




2839376

<https://www.phoenixcontact.com/us/products/2839376>

ZB 5,8:UNBEDRUCKT - Zack marker strip

2715209

<https://www.phoenixcontact.com/us/products/2715209>




Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.8 mm, lettering field size: 5.75 x 10.5 mm, Number of individual labels: 10

ZB 5,8 CUS - Zack marker strip

0824965

<https://www.phoenixcontact.com/us/products/0824965>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.8 mm, lettering field size: 5.75 x 10.5 mm, Number of individual labels: 10

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

PT 4X1- 5DC-ST - Surge protection plug

2838306

<https://www.phoenixcontact.com/us/products/2838306>



Protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side. Nominal voltage: 5 V DC

PT 4X1-12AC-ST - Surge protection plug

2838348

<https://www.phoenixcontact.com/us/products/2838348>



Protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side. Nominal voltage: 12 V AC

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

PT 4X1-12DC-ST - Surge protection plug

2838319

<https://www.phoenixcontact.com/us/products/2838319>



Protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side. Nominal voltage: 12 V DC

PT 4X1-24AC-ST - Surge protection plug

2838351

<https://www.phoenixcontact.com/us/products/2838351>



Protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side. Nominal voltage: 24 V AC

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

PT 4X1-24DC-ST - Surge protection plug

2838322

<https://www.phoenixcontact.com/us/products/2838322>



Protective plug PT with protective circuit for 4 conductors of signal circuits grounded on one side. Nominal voltage: 24 V DC

PT 4X1-48DC-ST - Surge protection plug

2858014

<https://www.phoenixcontact.com/us/products/2858014>



Surge protection plug for the base element, common mode voltage coarse and fine protection for four lines with a common reference potential. Design: 48 V DC

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/us/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

PT 4X1+F-BE - Surge protection base-element



2839376

<https://www.phoenixcontact.com/us/products/2839376>

SZS 0,6X3,5 VDE - Screwdriver

1212602

<https://www.phoenixcontact.com/us/products/1212602>



Screwdriver, slot-headed, VDE insulated, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com