

1089126  
<https://www.phoenixcontact.com/us/products/1089126>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Managed Switch 2000, 6 RJ45 ports 10/100 Mbps, 2 SFP ports 100 Mbps, PROFINET Conformance-Class B, Extended temperature range, PROFINET mode preset, PROFINET status LEDs

Your advantages

- MRP (client and manager)
- VLANs
- DHCP client, DHCP server (pool-based and port-based), DHCP option 82
- RSTP
- Ambient temperature -40 °C ... 70 °C
- Configuration memory
- Web-based management, SNMP
- PROFINET mode preset

Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1089126       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | DN17          |
| Product key                          | DNN122        |
| GTIN                                 | 4055626892368 |
| Weight per piece (including packing) | 806.1 g       |
| Weight per piece (excluding packing) | 650 g         |
| Customs tariff number                | 85176200      |
| Country of origin                    | DE            |


FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126  
<https://www.phoenixcontact.com/us/products/1089126>

Technical data

Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 128 mm                                                                             |
| Height              | 113 mm                                                                             |
| Depth               | 67 mm                                                                              |

Notes

|         |                                              |
|---------|----------------------------------------------|
| General | Support by phone or on-site (fee is charged) |
|---------|----------------------------------------------|

Material specifications

|                     |                                        |
|---------------------|----------------------------------------|
| Material base plate | Die-cast aluminum, corrosion-resistant |
| Housing material    | Stainless steel 1.4301                 |

Mounting

|               |                   |
|---------------|-------------------|
| Mounting type | DIN rail mounting |
|---------------|-------------------|

Interfaces

|                               |                                   |
|-------------------------------|-----------------------------------|
| Ethernet (RJ45)               |                                   |
| Connection method             | RJ45                              |
| Note on the connection method | Auto negotiation and autocrossing |
| Transmission speed            | 10/100 Mbps                       |
| Transmission physics          | Copper                            |
| Transmission length           | 100 m (per segment)               |
| Signal LEDs                   | Data receive, link status         |
| No. of channels               | 6 (RJ45 ports)                    |

|                      |                                                |
|----------------------|------------------------------------------------|
| Ethernet (SFP)       |                                                |
| Number of interfaces | 2                                              |
| Connection method    | SFP                                            |
| Transmission speed   | 100 Mbps (full duplex)                         |
| Transmission physics | Depending on the SFP module                    |
| Transmission length  | up to 40 km (depending on the SFP module used) |
| Signal LEDs          | Data receive, link status                      |
| No. of channels      | 2 (SFP ports)                                  |

Product properties

|                |                     |
|----------------|---------------------|
| Product type   | Switch              |
| Product family | Managed Switch 2000 |
| Type           | Block design        |

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

|                    |                                                                             |
|--------------------|-----------------------------------------------------------------------------|
| MTTF               | 357.82 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)     |
|                    | 191.24 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)  |
|                    | 25.65 Years (SN 29500 standard, temperature 70°C, operating cycle 100%)     |
| Special properties | Extended temperature range                                                  |
|                    | PROFINET mode preset, PROFINET status LEDs                                  |
| Signal delay       | ≥ 6.5 µs (Store and Forward mode, 10/100 Mbps, depending on the frame size) |

## Insulation characteristics

|                     |                |
|---------------------|----------------|
| Protection class    | III (VDE 0106) |
| Degree of pollution | 2              |

## Switch functions

|                                |                                                    |
|--------------------------------|----------------------------------------------------|
| Diagnostic functions           | RMON History                                       |
|                                | LLDP (Link Layer Discovery Protocol)               |
|                                | SNMP-Traps                                         |
|                                | N:1-Portmirroring                                  |
|                                | ACD (Address Conflict Detection)                   |
|                                | SysLog                                             |
|                                | CRC-Surveillance                                   |
| Basic functions                | Store-and-forward switch, complies with IEEE 802.3 |
| Signal contact control voltage | typ. 24 V DC                                       |
| PROFINET conformance class     | Conformance-Class B                                |
| PROFINET device function       | PROFINET device                                    |
|                                | Fast Startup                                       |
| Filter functions               | Quality of Service (8 priority classes)            |
|                                | Class of Service                                   |
|                                | DiffServ/DSCP                                      |
|                                | Port-Priorisierung                                 |
|                                | VLAN (up to 32 VLANs)                              |
|                                | IGMP Snooping/Querier (v1/v2)                      |
|                                | Auto-Query-Port                                    |
|                                | Extended Multicast Filtering                       |
| IP parameterization            | DHCP-Client                                        |
|                                | DHCP Option 82 (Relay Agent)                       |
|                                | DHCP server (pool-based, port-based)               |
|                                | BootP                                              |
|                                | DCP (Discovery and Configuration Protocol)         |
| MAC address table              | 8k                                                 |
| Management                     | Web-based management (HTTP/HTTPS)                  |
|                                | Role-based user management (LDAP, RADIUS)          |
|                                | SNMPv1/v2/v3                                       |
|                                | Command Line Interface (Telnet, SSH)               |

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

|                                  |                                                                                                                                        |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Redundancy                       | MRP (Media Redundancy Protocol)                                                                                                        |
|                                  | RSTP (Rapid Spanning Tree Protocol)                                                                                                    |
|                                  | FRD (Fast Ring Detection)                                                                                                              |
|                                  | Large Tree Support                                                                                                                     |
|                                  | LACP (Link Aggregation Control Protocol)                                                                                               |
|                                  | PROFINET S2 system redundancy                                                                                                          |
| Status and diagnostic indicators | LEDs: US1, US2 (power supply), Fail (alarm contact), 2 LEDs per Ethernet port (link/activity and speed), PROFINET status LEDs (BF, SF) |
| Additional functions             | Transmission of MMS and GOOSE (IEC 61850-8-1)                                                                                          |
|                                  | Transmission of Modbus/TCP                                                                                                             |
| Time synchronization             | SNTP (Simple Network Time Protocol)                                                                                                    |
| Security functions               |                                                                                                                                        |
| Port security                    | MAC-based, RADIUS (IEEE 802.1X), MAC Authentication Bypass                                                                             |
| Basic functions                  | Store-and-forward switch, complies with IEEE 802.3                                                                                     |

## Electrical properties

|                                                 |                                                              |
|-------------------------------------------------|--------------------------------------------------------------|
| Local diagnostics                               | US1/2 Supply voltage US1, US2 Green LED                      |
|                                                 | FAIL Div. LED red                                            |
|                                                 | LNK/ACT Link status Green LED                                |
|                                                 | SPD Data transmission speed Green LED                        |
|                                                 | BF Bus errors LED red                                        |
|                                                 | SF Group error LED red                                       |
| Maximum power dissipation for nominal condition | 4.7 W ( $U_S = \text{max}$ , $T_{\text{amb}} = \text{max}$ ) |
| Test voltage                                    | 500 V DC                                                     |
| Test section                                    | for one minute 500 V DC                                      |
| Transmission medium                             | Copper                                                       |
|                                                 | FO                                                           |

## Supply

|                             |                                                                   |
|-----------------------------|-------------------------------------------------------------------|
| Supply voltage (DC)         | 24 V DC (redundant)                                               |
| Supply voltage range        | 19.2 V DC ... 32 V DC                                             |
| Power supply connection     | Via COMBICON, max. conductor cross section 2.5 mm <sup>2</sup>    |
| Residual ripple             | 3.6 V <sub>PP</sub> (within the permitted voltage range)          |
| Max. current consumption    | 250 mA ( $U_S = \text{min}$ , $T_{\text{amb}} = \text{max}$ )     |
| Typical current consumption | 180 mA (at $U_S = 24 \text{ V DC}$ and 25 °C ambient temperature) |

## Function

|                                |              |
|--------------------------------|--------------|
| Signal contact control voltage | typ. 24 V DC |
|--------------------------------|--------------|

## Connection data

|                                |                                                                                                 |
|--------------------------------|-------------------------------------------------------------------------------------------------|
| Connection method              | Push-in spring connection                                                                       |
| Note on the connection method  | Use only copper connecting cables providing the permitted temperature range (-40 °C ... 75 °C). |
| Conductor cross section, rigid | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                                     |

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

|                                   |                     |
|-----------------------------------|---------------------|
| Conductor cross section, flexible | 0.2 mm² ... 2.5 mm² |
| Conductor cross section AWG       | 24 ... 16           |
| Stripping length                  | 10 mm               |

## Environmental and real-life conditions

### Ambient conditions

|                                          |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Degree of protection                     | IP20                                                                    |
| Ambient temperature (operation)          | -40 °C ... 70 °C                                                        |
| Ambient temperature (storage/transport)  | -40 °C ... 85 °C                                                        |
| Permissible humidity (operation)         | 10 % ... 95 % (non-condensing)                                          |
| Permissible humidity (storage/transport) | 10 % ... 95 % (non-condensing)                                          |
| Shock (operation)                        | 30g (EN 60068-2-27)                                                     |
| Vibration (operation)                    | in acc. with IEC 60068-2-6: 5g, 150 Hz                                  |
| Air pressure (operation)                 | 79 kPa ... 108 kPa up to 2000 m above mean sea level (Without derating) |
| Air pressure (storage/transport)         | 79 kPa ... 108 kPa up to 2000 m above mean sea level (Without derating) |

## Standards and regulations

|                                                                   |     |
|-------------------------------------------------------------------|-----|
| Free from substances that could impair the application of coating | Yes |
|-------------------------------------------------------------------|-----|

## Approvals

### UL, USA/Canada

|                |       |
|----------------|-------|
| Identification | cULus |
|----------------|-------|

### Corrosive gas test

|                |                                  |
|----------------|----------------------------------|
| Identification | ISA S71.04.2013 G3 Harsh Group A |
|----------------|----------------------------------|

### DNV GL data

|             |                                                                                         |
|-------------|-----------------------------------------------------------------------------------------|
| Temperature | B                                                                                       |
| Humidity    | B                                                                                       |
| Vibration   | A                                                                                       |
| EMC         | B                                                                                       |
| Enclosure   | Required protection according to the Rules shall be provided upon installation on board |

## EMC data

|                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| Conformance with EMC directives | EN 61000-6-2 EN 61000-4-2 (ESD) Criterion B                    |
|                                 | EN 61000-6-2 EN 61000-4-3 (electromagnetic fields) Criterion A |
|                                 | EN 61000-6-2 EN 61000-4-4 (EFT burst) Criterion A              |
|                                 | EN 61000-6-2 EN 61000-4-5 (surge) Criterion A                  |
|                                 | EN 61000-6-2 EN 61000-4-6 (line noise immunity) Criterion A    |
|                                 | EN 61000-6-2 EN 61000-6-4 (interference) Class A               |
| Noise immunity                  | EN 61000-6-2 EN 61000-6-4 (conducted interference) Class A     |
|                                 | EN 61000-6-2                                                   |

1089126  
<https://www.phoenixcontact.com/us/products/1089126>

|                               |                                           |
|-------------------------------|-------------------------------------------|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Noise emission                | EN 61000-6-4                              |

System properties

|                 |                                                    |
|-----------------|----------------------------------------------------|
| Functionality   |                                                    |
| Basic functions | Store-and-forward switch, complies with IEEE 802.3 |

Signaling

|                |                                                                                                                                        |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Status display | LEDs: US1, US2 (power supply), Fail (alarm contact), 2 LEDs per Ethernet port (link/activity and speed), PROFINET status LEDs (BF, SF) |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------|


# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch

1089126


<https://www.phoenixcontact.com/us/products/1089126>

## Drawings

Connection diagram

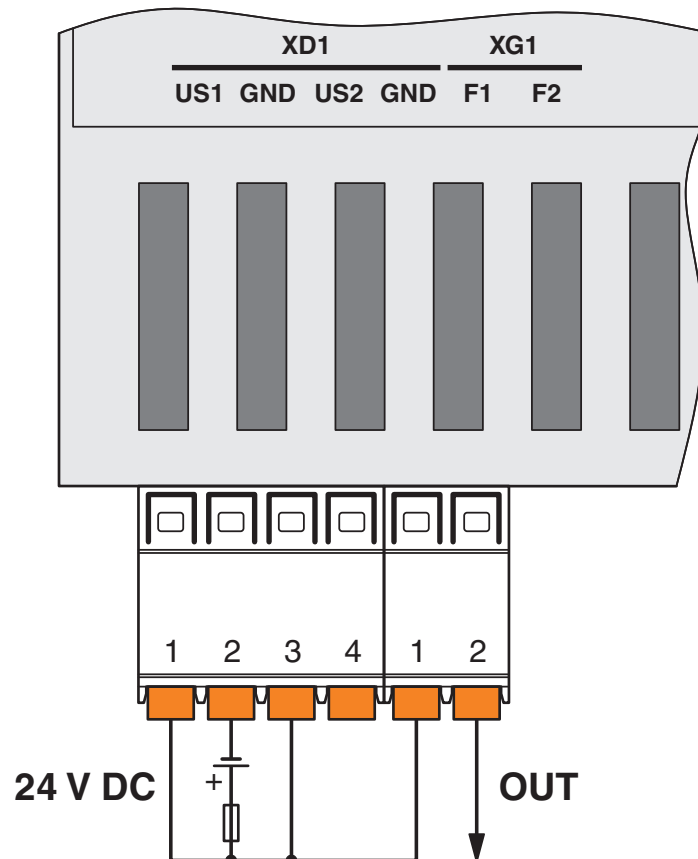

Dimensional drawing

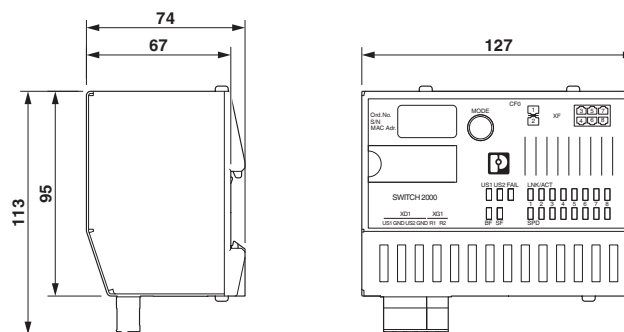


# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch

1089126

<https://www.phoenixcontact.com/us/products/1089126>

Connection diagram

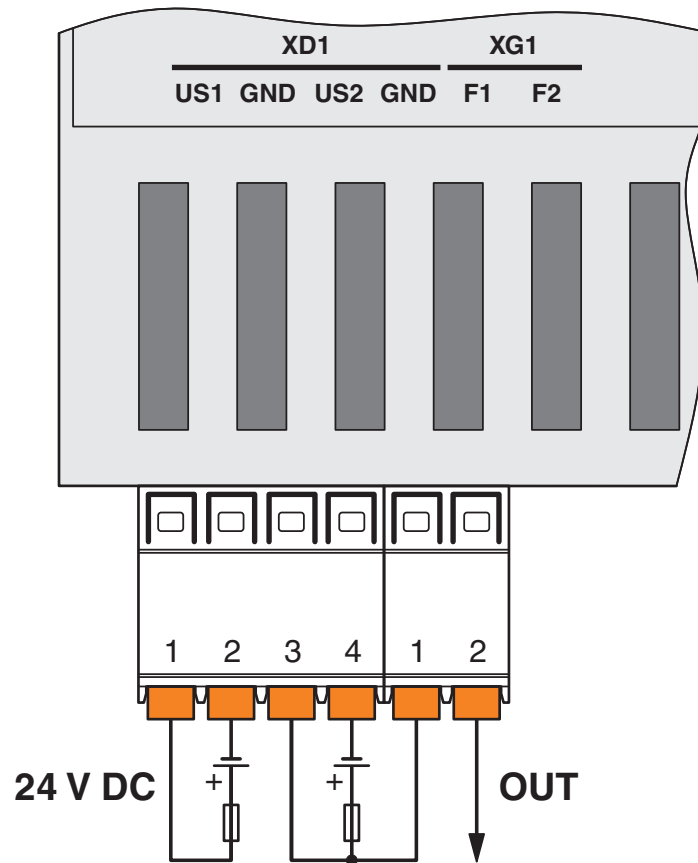



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1089126>



**DNV GL**

Approval ID: TAA00000YV



**LR**

Approval ID: LR22250919TA



**BV**

Approval ID: 48146\_B0 BV

**BSH**

Approval ID: 1045

**ABS**

Approval ID: 21\_2066186\_1\_PDA

**PROFINET**

Approval ID: Z12636



**RINA**

Approval ID: ELE014724XG001



**cULus Listed**

Approval ID: E238705

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126  
<https://www.phoenixcontact.com/us/products/1089126>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 19170401 |
| ECLASS-12.0 | 19170401 |
| ECLASS-13.0 | 19170401 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000734 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 43222600 |
|-------------|----------|

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126  
<https://www.phoenixcontact.com/us/products/1089126>

## Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 7(a), 7(c)-I                                                                                                                                                                                                                      |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-50                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | 637b635d-f0b8-4295-9fa7-2fc277b24ced                                                                                                                                                                                              |

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## Accessories

### SD FLASH 2GB - Program / configuration memory

2988162

<https://www.phoenixcontact.com/us/products/2988162>




Program and configuration memory, for extending the internal flash memory, pluggable, 2 GB.

---

### FL NETWORK MANAGER BASIC - Network management software

2702889

<https://www.phoenixcontact.com/us/products/2702889>



SNMP-based software for easy commissioning and monitoring of network components such as switches, routers, and WLAN access points

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FL DIN RA - DIN rail adapter

2891053

<https://www.phoenixcontact.com/us/products/2891053>

The FL DIN RA is installed in a standard, 19-inch rack (EIA-310-D, IEC 60297-3-100) to allow DIN rail mounted equipment to be rack mounted.




---

## FL RJ45 PROTECT CAP - Dust protection

2832991

<https://www.phoenixcontact.com/us/products/2832991>

Dust protection caps for RJ45 socket



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



---

## FL CAT5 PATCH 0,5 - Patch cable

2832263

<https://www.phoenixcontact.com/us/products/2832263>

Patch cable, CAT5, assembled, 0.5 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FL CAT5 PATCH 1,0 - Patch cable

2832276

<https://www.phoenixcontact.com/us/products/2832276>

Patch cable, CAT5, assembled, 1 m



---

## FL CAT5 PATCH 2,0 - Patch cable

2832289

<https://www.phoenixcontact.com/us/products/2832289>

Patch cable, CAT5, assembled, 2 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch




1089126

<https://www.phoenixcontact.com/us/products/1089126>

## NBC-R4AC-R4AC-IE8A/.../... - Patch cable

1411854

<https://www.phoenixcontact.com/us/products/1411854>




Patch cable, degree of protection: IP20, number of positions: 8, 10 Gbps, CAT6<sub>A</sub>, cable outlet: straight, Ethernet

---

## NBC-R4AC/10G-R4AC/10G-94F/2,0 - Patch cable

1408360

<https://www.phoenixcontact.com/us/products/1408360>



Patch cable, CAT6<sub>A</sub>, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 2.0 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch




1089126

<https://www.phoenixcontact.com/us/products/1089126>

## NBC-R4AC/10G-R4AC/10G-94F/3,0 - Patch cable

1408365

<https://www.phoenixcontact.com/us/products/1408365>



Patch cable, CAT6<sub>A</sub>, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 3.0 m

---

## NBC-R4AC/1,0-93B/R4AC - Patch cable

1408968

<https://www.phoenixcontact.com/us/products/1408968>



Patch cable, degree of protection: IP20, cable length: 1 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## NBC-R4AC/2,0-93B/R4AC - Patch cable

1408969

<https://www.phoenixcontact.com/us/products/1408969>



Patch cable, degree of protection: IP20, cable length: 2 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET

---

## NBC-R4AC/5,0-93B/R4AC - Patch cable

1408970

<https://www.phoenixcontact.com/us/products/1408970>



Patch cable, degree of protection: IP20, cable length: 5 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch




1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FKCN 2,5/ 2-ST GY7035 BD:1-2 - PCB connector

1082048

<https://www.phoenixcontact.com/us/products/1082048>




PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: light grey, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Tin, contact connection type: Socket, number of rows: 1, number of positions: 2, product range: FKCN 2,5/...-ST, pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON MSTB 2,5, locking: Screw locking mechanism, mounting: Screw flange, type of packaging: packed in cardboard

---

## FKCN 2,5/ 4-ST GY7035 BD:1-4 - PCB connector

1082059

<https://www.phoenixcontact.com/us/products/1082059>



PCB connector, nominal cross section: 2.5 mm<sup>2</sup>, color: light grey, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Tin, contact connection type: Socket, number of rows: 1, number of positions: 4, product range: FKCN 2,5/...-ST, pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON MSTB 2,5, locking: without, mounting: without, type of packaging: packed in cardboard

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FL SFP FX - Media module

2891081

<https://www.phoenixcontact.com/us/products/2891081>



The small form-factor plug-in module provides a fiber optic interface with a data transmission speed of 100 Mbps with a wavelength of 1310 nm (long).

---

## FL SFP FX SM - Media module

2891082

<https://www.phoenixcontact.com/us/products/2891082>



The small form-factor plug-in module provides a fiber optic interface with a data transmission speed of 100 Mbps with a wavelength of 1310 nm (long).

# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FL SFP FE WDM20-SET - Media module

2702439

<https://www.phoenixcontact.com/us/products/2702439>

Fast Ethernet SFP WDM set for transmission up to a maximum of 20 km on a single fiber with a wavelength of 1310/1550 nm.




---

## FOC-LC:PA-SC:PA-OM2:D01/1 - FO patch cable

1115607

<https://www.phoenixcontact.com/us/products/1115607>

Multi-mode OM2 duplex jumper, LC-SC, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-SC:PA-OM2:D01/2 - FO patch cable

1115605

<https://www.phoenixcontact.com/us/products/1115605>

Multi-mode OM2 duplex jumper, LC-SC, UPC polishing, length 2 m




---

## FOC-LC:PA-LC:PA-OM2:D01/1 - FO patch cable

1115633

<https://www.phoenixcontact.com/us/products/1115633>

Multi-mode OM2 duplex jumper, LC-LC, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-LC:PA-OM2:D01/2 - FO patch cable

1115634

<https://www.phoenixcontact.com/us/products/1115634>

Multi-mode OM2 duplex jumper, LC-LC, UPC polishing, length 2 m




---

## FOC-LC:PA-ST:PA-OM2:D01/1 - Fiber optic cable

1115588

<https://www.phoenixcontact.com/us/products/1115588>

Multi-mode OM2 duplex jumper, LC-ST, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-ST:PA-OM2:D01/2 - Fiber optic cable

1115587

<https://www.phoenixcontact.com/us/products/1115587>

Multi-mode OM2 duplex jumper, LC-ST, UPC polishing, length 2 m




---

## FOC-LC:PA-SC:PA-OM4:D01/1 - FO patch cable

1115601

<https://www.phoenixcontact.com/us/products/1115601>

Multi-mode OM4 duplex jumper, LC-SC, UPC polishing, length 1 m





# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-SC:PA-OM4:D01/2 - FO patch cable

1115600

<https://www.phoenixcontact.com/us/products/1115600>

Multi-mode OM4 duplex jumper, LC-SC, UPC polishing, length 2 m




---

## FOC-LC:PA-LC:PA-OM4:D01/1 - FO patch cable

1115625

<https://www.phoenixcontact.com/us/products/1115625>

Multi-mode OM4 duplex jumper, LC-LC, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-LC:PA-OM4:D01/2 - FO patch cable

1115624

<https://www.phoenixcontact.com/us/products/1115624>

Multi-mode OM4 duplex jumper, LC-LC, UPC polishing, length 2 m



---

## FOC-LC:PA-LC:PA-OS2:D01/1 - FO patch cable

1115636

<https://www.phoenixcontact.com/us/products/1115636>

Single-mode OS2 duplex jumper, LC-LC, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-LC:PA-OS2:D01/2 - FO patch cable

1115629

<https://www.phoenixcontact.com/us/products/1115629>

Single-mode OS2 duplex jumper, LC-LC, UPC polishing, length 2 m



---

## FOC-LC:PA-ST:PA-OS2:D01/1 - FO patch cable

1115596

<https://www.phoenixcontact.com/us/products/1115596>

Single-mode OS2 duplex jumper, LC-ST, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126

<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-ST:PA-OS2:D01/2 - FO patch cable

1115595

<https://www.phoenixcontact.com/us/products/1115595>

Single-mode OS2 duplex jumper, LC-ST, UPC polishing, length 2 m




---

## FOC-LC:PA-SC:PA-OS2:D01/1 - FO patch cable

1115618

<https://www.phoenixcontact.com/us/products/1115618>

Single-mode OS2 duplex jumper, LC-SC, UPC polishing, length 1 m



# FL SWITCH 2406-2SFX PN - Industrial Ethernet Switch



1089126


<https://www.phoenixcontact.com/us/products/1089126>

## FOC-LC:PA-SC:PA-OS2:D01/2 - FO patch cable

1115617

<https://www.phoenixcontact.com/us/products/1115617>

Single-mode OS2 duplex jumper, LC-SC, UPC polishing, length 2 m



## VS-08-RJ45-5-Q/IP20 - RJ45 connector

1656725

<https://www.phoenixcontact.com/us/products/1656725>



RJ45 connector, design: RJ45, degree of protection: IP20, number of positions: 8, 1 Gbps, CAT5, material: Plastic, connection method: Insulation displacement connection, connection cross section: AWG 26- 23, cable outlet: straight, color: traffic grey A RAL 7042, Ethernet

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)