

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 18 mm ... 25 mm, shielding: no, connecting thread: M40 x 1.5, color: silver, with O-ring

## Commercial data

Item number	1424529
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DAX
Catalog page	Page 688 (C-2-2019)
GTIN	4055626374345
Weight per piece (including packing)	158.96 g
Weight per piece (excluding packing)	158.96 g
Customs tariff number	74198090
Country of origin	TR

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

## Technical data

### Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---


### Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BMBC-05
Shielded	no
Execution of the strain relief	A

### Characteristics

Category of shock impact	7
Design, Strain relief	A

### Dimensions

Dimensional drawing	
Length	47 mm
Length of the connecting thread	9 mm
Hole diameter	40.1 mm ... 40.3 mm
Wrench size, union nut	40 mm
Wrench size, support	43 mm
Hexagon angular dimension	48.4 mm
Thread type connection side	M40 x 1.5
Thread pitch	1.5 mm

### Connection data

Tightening torque	30 Nm $\pm$ 1 Nm (Cap nut)
	12 Nm (Support sleeve)

### Material specifications

Color	Brass
Material Compression ring	PA 6
Seal material O-ring	Perbunan
Seal material Cable seal	CR

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

Material for screw connection	Brass, nickel-plated
-------------------------------	----------------------

## Cable/line

External cable diameter Cable 1	18 mm ... 25 mm
External cable diameter	18 mm ... 25 mm (for UL 514 B)

## Environmental and real-life conditions

### Ambient conditions


Degree of protection	IP66
	IP68 (5 bar, 30 min.)
	IP69 (DIN EN 60529 / IEC 60529)
Ambient temperature (operation)	-40 °C ... 100 °C (static)

# G-INS-M40-S68N-NNES-S - Cable gland

1424529

<https://www.phoenixcontact.com/us/products/1424529>

## Drawings

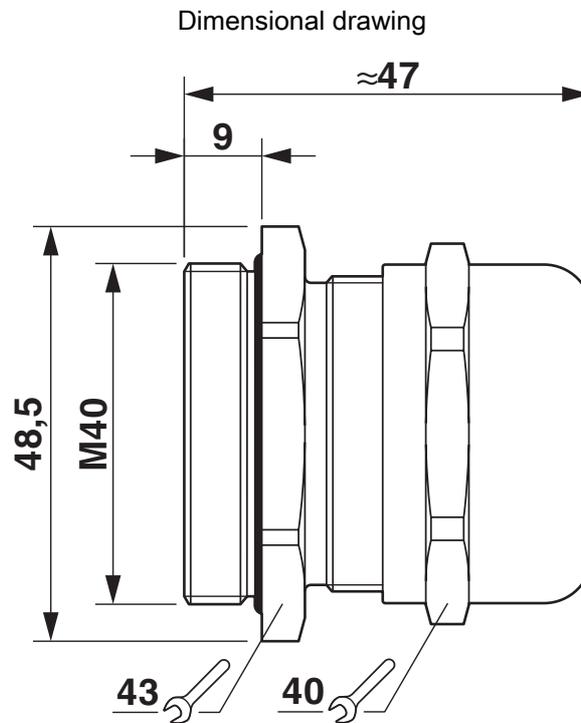

Dimensional drawing

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424529>

### DNV

Approval ID: TAE00003WY



### UL Listed

Approval ID: E199260



### cUL Listed

Approval ID: E199260

### cULus Listed

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

## Classifications

### ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

### ETIM

ETIM 9.0	EC000441
----------	----------

### UNSPSC

UNSPSC 21.0	39121300
-------------	----------

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	4bc6e4d5-9ddd-42a2-bb4a-1b5f67fb6d9c

# G-INS-M40-S68N-NNES-S - Cable gland



1424529

<https://www.phoenixcontact.com/us/products/1424529>

## Accessories

### A-INL-M40-N-S - Counter nut

1411246

<https://www.phoenixcontact.com/us/products/1411246>

Counter nut, for threads M40 x 1.5, color: silver



---

### SEALING PLUG 20X22 RD - Closing cap

1421862

<https://www.phoenixcontact.com/us/products/1421862>

Closing cap, color: red



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)