

# P-FU 6,3X32 LED 24-EX - Fuse plug



3046509

<https://www.phoenixcontact.com/us/products/3046509>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse plug, Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block., nominal current: 10 A, fuse type: G / 6,3 x 32, color: black

## Your advantages

- Large-surface labeling option
- Versions with bipolar error display
- Test contacts on both sides of the fuse
- Can be used for overload/short-circuit protection

## Commercial data

Item number	3046509
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BE19
Product key	BE1Z3X
Catalog page	Page 174 (C-1-2019)
GTIN	4046356919265
Weight per piece (including packing)	6.6 g
Weight per piece (excluding packing)	6.6 g
Customs tariff number	85369095
Country of origin	PL

# P-FU 6,3X32 LED 24-EX - Fuse plug

3046509

<https://www.phoenixcontact.com/us/products/3046509>



## Technical data

### Notes

Notes on operation	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
--------------------	---

### Product properties

Product type	Fuse
Potentials	1

### Insulation characteristics

Degree of pollution	3
---------------------	---

### Electrical properties

Fuse	G / 6,3 x 32
LED voltage range	12 V DC ... 30 V DC
LED current range	0.31 mA ... 0.95 mA

### Input data

LED voltage range	12 V DC ... 30 V DC
-------------------	---------------------

### Connection data

Nominal current	10 A (the current is determined by the fuse used)
Maximum load current	10 A (the current is determined by the fuse used)

### Dimensions

Width	8.2 mm
Height	40 mm
Depth	27 mm
Length	40 mm

### Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material	PA

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

# P-FU 6,3X32 LED 24-EX - Fuse plug


3046509

<https://www.phoenixcontact.com/us/products/3046509>



## Drawings

Application drawing

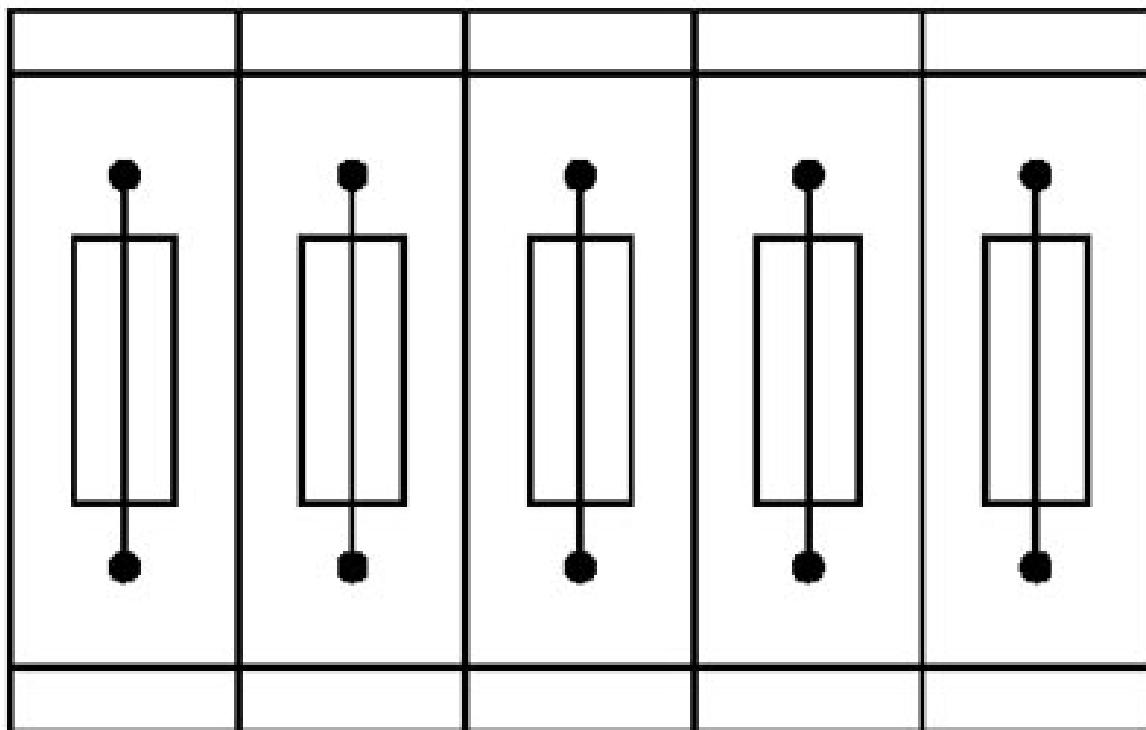

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks


## P-FU 6,3X32 LED 24-EX - Fuse plug

3046509

<https://www.phoenixcontact.com/us/products/3046509>

**PHÖNIX CONTACT**

## Circuit diagram

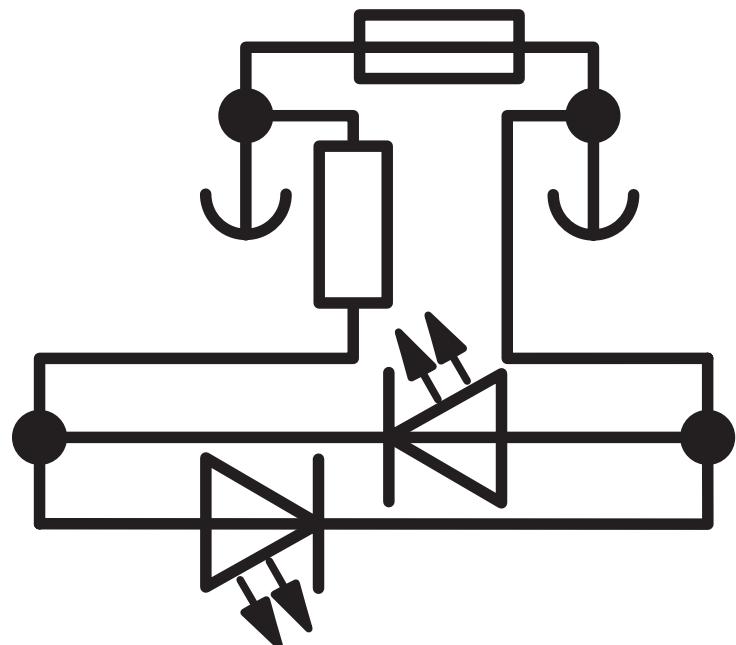


# P-FU 6,3X32 LED 24-EX - Fuse plug

3046509

<https://www.phoenixcontact.com/us/products/3046509>



Application drawing

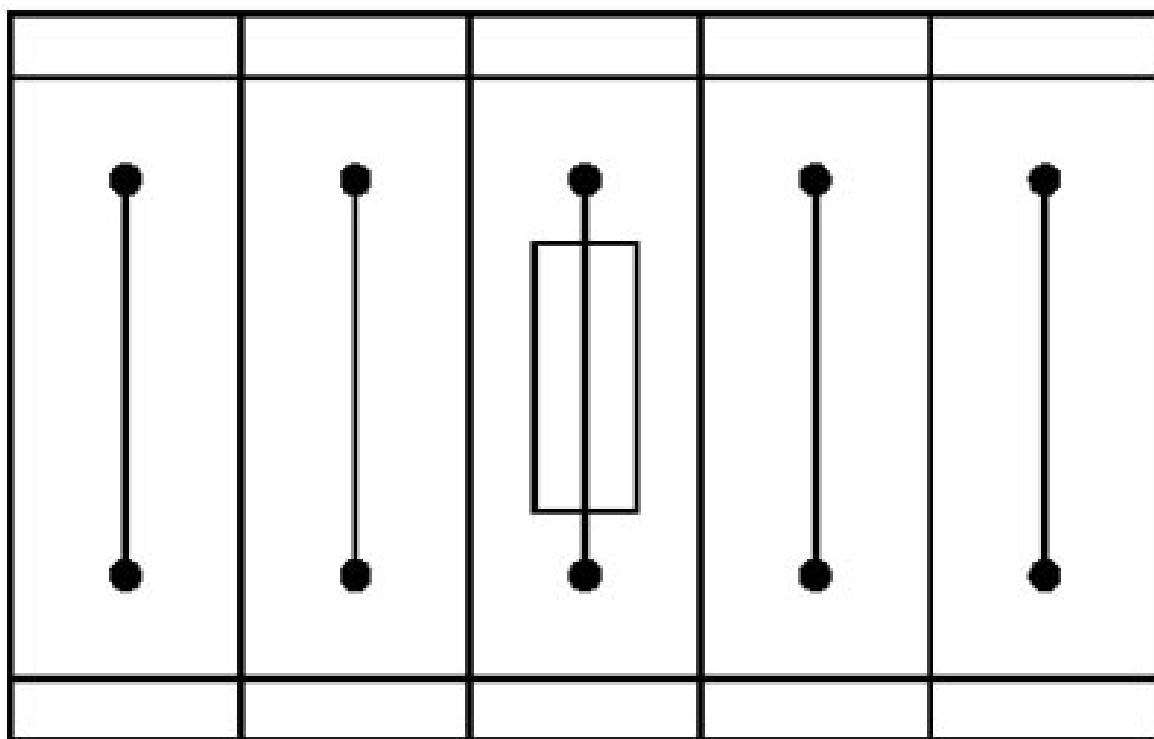

Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks

# P-FU 6,3X32 LED 24-EX - Fuse plug

3046509

<https://www.phoenixcontact.com/us/products/3046509>



## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3046509>



**CSA**

Approval ID: 2030668



**CSA**

Approval ID: 2030668



**EAC**

Approval ID: RU C-DE.BL08.B.00714



**cUL Recognized**

Approval ID: E192998



**EAC Ex**

Approval ID: RU C-DE.Ax07.B.03227



**UL Recognized**

Approval ID: E192998



**CCC**

Approval ID: 2020322313000632



**UKCA-EX**

Approval ID: UL22UKEX2452U

**cULus Recognized**

# P-FU 6,3X32 LED 24-EX - Fuse plug

3046509

<https://www.phoenixcontact.com/us/products/3046509>



## Classifications

### ECLASS

ECLASS-11.0	27141149
ECLASS-12.0	27141149
ECLASS-13.0	27250305

### ETIM

ETIM 9.0	EC002018
----------	----------

### UNSPSC

UNSPSC 21.0	39121600
-------------	----------

# P-FU 6,3X32 LED 24-EX - Fuse plug



3046509

<https://www.phoenixcontact.com/us/products/3046509>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

### Phoenix Contact USA

586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)