

1407662

https://www.phoenixcontact.com/us/products/1407662

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel mounting base B24, for double locking latch, material: PA, protective cover material: PC, height: 30.5 mm, cable gland: none, protective cover: yes, Standard, with flat gasket

Your advantages

- · Lower costs than metal version
- · Low weight
- · Lower risk of condensation

Commercial data

Item number	1407662
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF57
Product key	BF7APL
Catalog page	Page 640 (C-2-2019)
GTIN	4046356777254
Weight per piece (including packing)	123 g
Weight per piece (excluding packing)	118 g
Customs tariff number	85389099
Country of origin	PL



1407662

https://www.phoenixcontact.com/us/products/1407662

Technical data

Notes

General	For contact inserts HC-B24, BB46, D64, DD108, M, K, HV10-I-
	PT, HV 10-EC

Product properties

Product type	Housing with locking latch
Housing type	Panel mounting base
Product family	HC-EVO-B
Application	Standard
Туре	B24
Protective cover	yes
Pg screw connection	none

Dimensions

Dimensional drawing	130 140,5 140,5
Width	53 mm
Height	30.5 mm
Length	140.5 mm
Hole diameter	4.5 mm

Installation dimensions

Width of the assembly cutout	35 mm
Length of the assembly cutout	113 mm

Material specifications

Flammability rating according to UL 94	V0 (Housing)
	V0 (Protective cover)
Seal material	NBR
Housing material	PA
Material, protective cover	PC

Mechanical properties

Mechanical data

|--|

Connection data

Tightening torque	0.8 Nm 1.2 Nm (For M4 mounting screws on the panel-mount
	base)



1407662

https://www.phoenixcontact.com/us/products/1407662

Mounting

Assembly note	Not for D series terminal adapters
	Not for HC-B 24-ADP-B adapter plates

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66 (when plugged in)
	IP54 (with closed protective cover)
Enclosure rating (NEMA)	12 (UL 50e)
Impact strength	IK09
Ambient temperature (operation)	-40 °C 125 °C




https://www.phoenixcontact.com/us/products/1407662




Drawings

Dimensional drawing

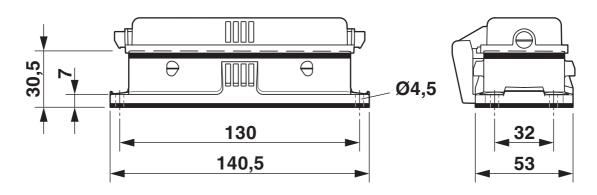

Dimensional drawing

Dimensional drawing

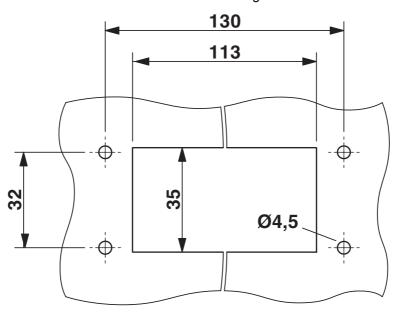

Mounting cutout



1407662

https://www.phoenixcontact.com/us/products/1407662

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1407662

DNV

Approval ID: TAE000037S



EAC

Approval ID: RU C-DE.Al30.B.01102



EAC

Approval ID: RU C-DE.BL08.B.00511



cUL RecognizedApproval ID: E255026



UL Recognized

Approval ID: E255026

cULus Recognized



1407662

https://www.phoenixcontact.com/us/products/1407662

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202
ETIM	
ETIM 9.0	EC000437
UNSPSC	

31261500



1407662

https://www.phoenixcontact.com/us/products/1407662

Environmental product compliance

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1407662


https://www.phoenixcontact.com/us/products/1407662

Accessories

HC-B24-SP-RBK - Profile gasket

1407709

https://www.phoenixcontact.com/us/products/1407709





HC-B24-SG-RBK - Flat gasket

1407705

https://www.phoenixcontact.com/us/products/1407705

Replacement flat gasket, for HEAVYCON EVO panel mounting base type B24






1407662

https://www.phoenixcontact.com/us/products/1407662

HC-B24-BC-HI-PLBK - Protective cover

1407695

https://www.phoenixcontact.com/us/products/1407695





US-EMP (20X9) - Snap-in markers

0829439

https://www.phoenixcontact.com/us/products/0829439



Snap-in markers, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 20×9 mm, Number of individual labels: 70




1407662

https://www.phoenixcontact.com/us/products/1407662

US-EMP (20X9) CUS - Snap-in markers

0830028

https://www.phoenixcontact.com/us/products/0830028





HC-STA-B24-DC-PL - Protective cover

1421103

https://www.phoenixcontact.com/us/products/1421103



Protective cover, design: B24

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com