

G-INS-PG13,5-M68N-PNES-BK - Cable gland

1424498

<https://www.phoenixcontact.com/us/products/1424498>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: Pg13.5, color: jet black RAL 9005

Your advantages

- Plastic material conforms to UL 746C f1

Commercial data

Item number	1424498
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 687 (C-2-2019)
GTIN	4055626373287
Weight per piece (including packing)	11.3 g
Weight per piece (excluding packing)	10.93 g
Customs tariff number	39269097
Country of origin	TR

G-INS-PG13,5-M68N-PNES-BK - Cable gland



1424498

<https://www.phoenixcontact.com/us/products/1424498>

Technical data

Mounting

Assembly note	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
---------------	---

Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BS-24
Shielded	no

Dimensions

Dimensional drawing	
Length	40 mm
Length of the connecting thread	10 mm
Hole diameter	20.5 mm ... 20.7 mm
Wrench size, union nut	24 mm
Wrench size, support	24 mm
Hexagon angular dimension	27.8 mm
Thread type connection side	Pg13.5

Connection data

Tightening torque	4 Nm ± 0.5 Nm (Cap nut)
	3 Nm (Support sleeve)

Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V2
Seal material Cable seal	CR
Material for screw connection	PA

Cable/line

External cable diameter Cable 1	6 mm ... 12 mm
External cable diameter	6 mm ... 12 mm (for UL 514 B)

Environmental and real-life conditions

G-INS-PG13,5-M68N-PNES-BK - Cable gland

1424498

<https://www.phoenixcontact.com/us/products/1424498>




Ambient conditions

Degree of protection	IP66 IP68 (5 bar / 0.5 h)
Enclosure rating (NEMA)	1 4 4X 12 13
Ambient temperature (operation)	-40 °C ... 100 °C (static)

Drawings

Dimensional drawing

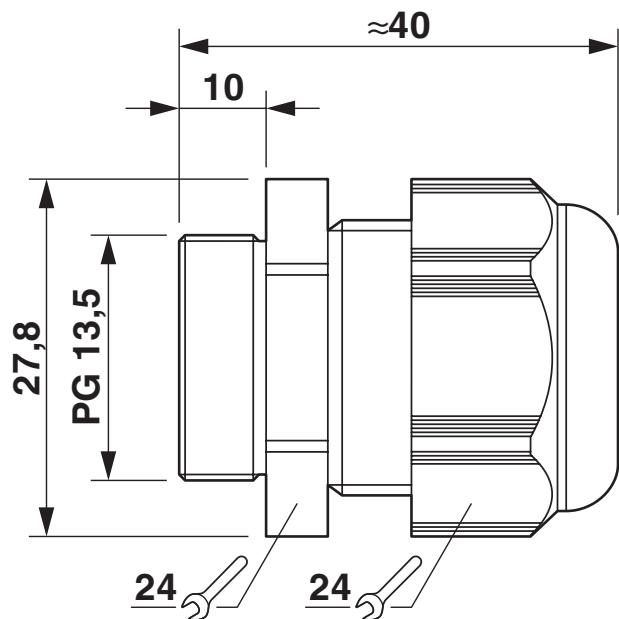

Dimensional drawing

G-INS-PG13,5-M68N-PNES-BK - Cable gland

1424498

<https://www.phoenixcontact.com/us/products/1424498>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424498>

DNV

Approval ID: TAE00003WX



CSA

Approval ID: 115116



cUL Recognized

Approval ID: E199260



UL Recognized

Approval ID: E199260

cULus Recognized

G-INS-PG13,5-M68N-PNES-BK - Cable gland

1424498

<https://www.phoenixcontact.com/us/products/1424498>



Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

G-INS-PG13,5-M68N-PNES-BK - Cable gland

1424498

<https://www.phoenixcontact.com/us/products/1424498>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

G-INS-PG13,5-M68N-PNES-BK - Cable gland



1424498

<https://www.phoenixcontact.com/us/products/1424498>

Accessories

A-INL-PG13,5-P-GY - Counter nut

1411224

<https://www.phoenixcontact.com/us/products/1411224>

Counter nut, for threads Pg13.5, color: silver-grey RAL 7001



SEALING PLUG 9X16 RD - Closing cap

1400259

<https://www.phoenixcontact.com/us/products/1400259>

Closing cap, color: red



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com