G-INVEN-M12-M67N-PNES-BK - Cable gland

1424535

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Cable gland, material for screw connection: PA, application: Standard, external cable diameter 4 mm ... 7 mm, shielding: no, connecting thread: M12 x 1.5, color: jet black RAL 9005, with pressure compensation element and flat gasket

Product description

Cable gland with integrated pressure compensation element. Prevents low pressure forming in the housing. Membrane: resistant to water and dirt

Your advantages

- Reduces the formation of condensation
- Screw connection with integrated pressure compensation element
- Plastic material conforms to UL 746C f1

Commercial data

Item number	1424535
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 694 (C-2-2019)
GTIN	4055626374406
Weight per piece (including packing)	6.6 g
Weight per piece (excluding packing)	6.35 g
Customs tariff number	39269097
Country of origin	TR

## Technical data

Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Type	with pressure compensation element and flat gasket
Manufacturer	BIMED
Manufacturer Designation	BMVG-2S
Air flow rate	25 (l/h at a pressure differential of 70 mbar)
Shielded	no
Execution of the strain relief	A

Characteristics

Category of shock impact	5
Design, Strain relief	A

Dimensions

Dimensional drawing	
Length	33 mm
Length of the connecting thread	8 mm
Hole diameter	12.1 mm ... 12.2 mm
Wrench size, union nut	19 mm
Wrench size, support	19 mm
Thread type connection side	M12 x 1.5
Thread pitch	1.5 mm

Connection data

Tightening torque	2 Nm ±0.2 Nm (Cap nut)
	1.5 Nm (Support sleeve)

Material specifications

Color	black (RAL 9005)
Material	PTFE
Flammability rating according to UL 94	V2
Seal material Flat gasket	NBR
Seal material Cable seal	CR
Material for screw connection	PA

Cable/line

External cable diameter Cable 1	4 mm ... 7 mm
External cable diameter	4 mm ... 8 mm (for UL 514 B)
Halogen-free	no

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP66
Enclosure rating (NEMA)	1
	4
	4X
	12
	13
Ambient temperature (operation)	-20 °C ... 100 °C (static)

G-INVEN-M12-M67N-PNES-BK - Cable gland

1424535

https://www.phoenixcontact.com/us/products/1424535

Drawings

Dimensional drawing
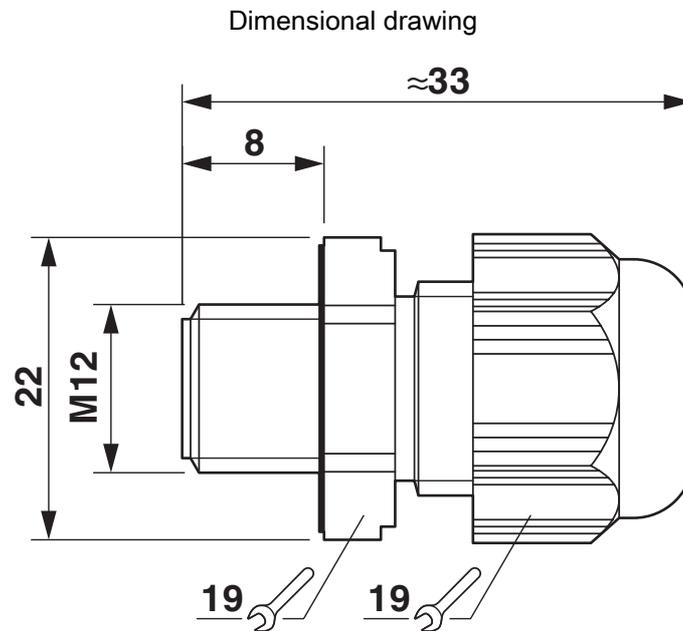
Dimensional drawing

G-INVEN-M12-M67N-PNES-BK - Cable gland

1424535

https://www.phoenixcontact.com/us/products/1424535

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1424535

DNV
Approval ID: TAE00003WX

cUL Recognized
Approval ID: E199260

UL Recognized
Approval ID: E199260

cULus Recognized

G-INVEN-M12-M67N-PNES-BK - Cable gland

1424535

https://www.phoenixcontact.com/us/products/1424535

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441

UNSPSC

UNSPSC 21.0	39121300

G-INVEN-M12-M67N-PNES-BK - Cable gland

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

G-INVEN-M12-M67N-PNES-BK - Cable gland

1424535

https://www.phoenixcontact.com/us/products/1424535

Accessories

A-INL-M12-P-BK - Counter nut

1411213

https://www.phoenixcontact.com/us/products/1411213

Counter nut, for threads M12 x 1.5, color: jet black

SEALING PLUG 6X16 RD - Closing cap

1400254

https://www.phoenixcontact.com/us/products/1400254

Closing cap, color: red