

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sleeve housing D50, for double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, lateral, 1x M25, height: 80 mm, cable gland: none, Standard

## Commercial data

Item number	1424403
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APE
Catalog page	Page 532 (C-2-2019)
GTIN	4055626371436
Weight per piece (including packing)	255.3 g
Weight per piece (excluding packing)	255.3 g
Customs tariff number	85389099
Country of origin	CN

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## Technical data

### Product properties

Product type	Housing with locking latch
Housing type	Sleeve housing
Product family	HC-STA-D
Application	Standard
Type	D50
No. of cable outlets	1
Type of the screw connection	1x M25
Type	Tall design
Cable outlet	lateral
Pg screw connection	none

### Dimensions

Dimensional drawing	
Width	56 mm
Height	80 mm
Length	82 mm

### Material specifications

Housing material	Die-cast aluminum, salt water resistant
Housing surface material	uncoated

### Mechanical properties

Mechanical data	
Type of the screw connection	1x M25
Locking type	Pin

### Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP66
	IP67
Impact strength	IK08
Ambient temperature (operation)	-40 °C ... 125 °C

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing


1424403

<https://www.phoenixcontact.com/us/products/1424403>



## Drawings

Dimensional drawing

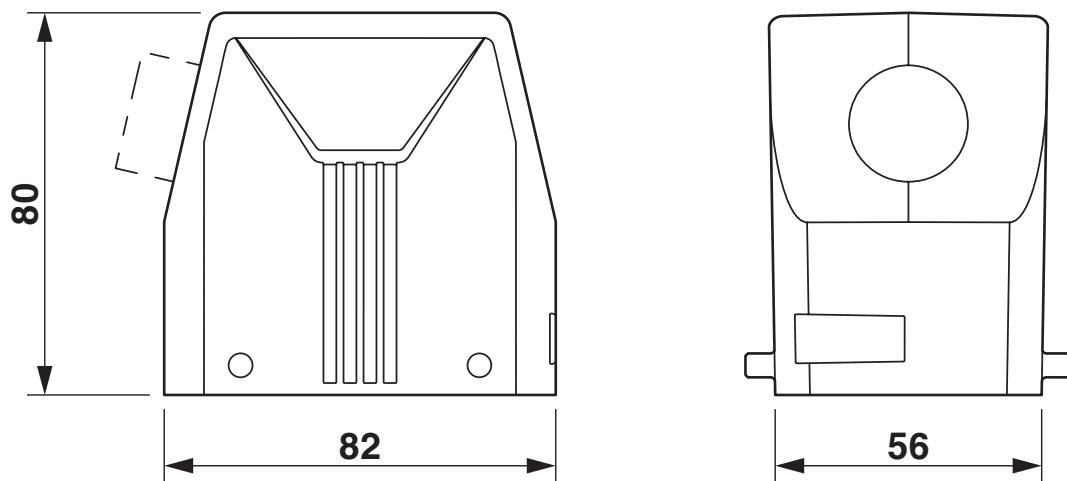

Dimensional drawing

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424403>

**DNV**

Approval ID: TAE000037S



**cUL Recognized**

Approval ID: E255026



**UL Recognized**

Approval ID: E255026



**EAC**

Approval ID: RU C-DE.BL08.B.00511

**cJLus Recognized**

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing

1424403

<https://www.phoenixcontact.com/us/products/1424403>



## Classifications

### ECLASS

ECLASS-11.0	27440202
ECLASS-12.0	27440202
ECLASS-13.0	27440202

### ETIM

ETIM 9.0	EC000437
----------	----------

### UNSPSC

UNSPSC 21.0	31261500
-------------	----------

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## Accessories

### G-INS-M25-S68N-NNES-S - Cable gland

1424527

<https://www.phoenixcontact.com/us/products/1424527>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 10 mm ... 14 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

### G-INS-M25-M68N-NNES-S - Cable gland

1411165

<https://www.phoenixcontact.com/us/products/1411165>



Cable gland, material for screw connection: Brass, nickel-plated, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## G-INSEC-M25-S68N-NCRS-S - Cable gland

1411190

<https://www.phoenixcontact.com/us/products/1411190>



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 11 mm ... 16 mm, shielding: yes, connecting thread: M25 x 1.5, color: silver, with O-ring

## G-INS-M25-M68N-SNES-S - Cable gland

1424544

<https://www.phoenixcontact.com/us/products/1424544>



Cable gland, material for screw connection: Stainless steel 1.4305, application: Standard, external cable diameter 11 mm ... 17 mm, shielding: no, connecting thread: M25 x 1.5, color: silver, with O-ring

# HC-STA-D50-HHFD-1STM25-EL-AL - Housing

1424403

<https://www.phoenixcontact.com/us/products/1424403>



## HC-D50-HCWD-PLR-BK - Protective cover

1346553

<https://www.phoenixcontact.com/us/products/1346553>

Protective cover D50, with double locking latch, protective cover material: PC, height: 29 mm, seal: yes



---

## US-EMLP (20X9) CUS - Plastic label

0830085

<https://www.phoenixcontact.com/us/products/0830085>

Plastic label, can be ordered: by card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 75



# HC-STA-D50-HHFD-1STM25-EL-AL - Housing

1424403

<https://www.phoenixcontact.com/us/products/1424403>



## US-EMLP-HA (20X9) - Plastic label

0830989

<https://www.phoenixcontact.com/us/products/0830989>

Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 20 x 9 mm, Number of individual labels: 70



---

## WP-G HF IP66 M25 BK - Screw connection

3240899

<https://www.phoenixcontact.com/us/products/3240899>

Cable gland, metric thread, IP66 protection, straight



# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

WP-G HF IP69K M25 BK - Screw connection

3240885

<https://www.phoenixcontact.com/us/products/3240885>

Cable gland, metric thread, IP68/69k protection, straight



---

WP-GA HF IP66 M25 BK - Screw connection

3240927

<https://www.phoenixcontact.com/us/products/3240927>

Cable gland, metric thread, IP66 protection, angled



# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

WP-GA HF IP69K M25 BK - Screw connection

3240913

<https://www.phoenixcontact.com/us/products/3240913>

Cable gland, metric thread, IP68/69k protection, angled



---

WP-GR HF IP66 M25 BK - Screw connection

3240955

<https://www.phoenixcontact.com/us/products/3240955>

Cable gland, metric thread, IP66 protection, with strain relief



# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

WP-GR HF IP69K M25 BK - Screw connection

3240941

<https://www.phoenixcontact.com/us/products/3240941>

Cable gland, metric thread, IP68/69k protection, with strain relief



---

WP-G PP HF M25 - Screw connection

3240999

<https://www.phoenixcontact.com/us/products/3240999>

Cable gland made from PP with metric thread, IP65 protection



# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## WP-GT PP HF M25 - Screw connection

3241013

<https://www.phoenixcontact.com/us/products/3241013>

Cable gland made from PP with metric thread, rotatable, IP54 protection



---

## WP-G BRASS IP40 M25 - Screw connection

3241048

<https://www.phoenixcontact.com/us/products/3241048>

Cable gland made from brass with metric thread, IP40 protection



# HC-STA-D50-HHFD-1STM25-EL-AL - Housing



1424403

<https://www.phoenixcontact.com/us/products/1424403>

## WP-GT BRASS M25 - Screw connection

3241034

<https://www.phoenixcontact.com/us/products/3241034>

Cable gland made from brass with metric thread, rotatable, IP40 protection



## WP-G BRASS IP65 M25 - Screw connection

3241062

<https://www.phoenixcontact.com/us/products/3241062>

Cable gland made from brass with metric thread, IP65 protection



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

[info@phoenixcon.com](mailto:info@phoenixcon.com)