

2792604

https://www.phoenixcontact.com/us/products/2792604

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Electronic housing, fully equipped with 6 screw connections per side for two PCBs

#### Commercial data

Item number	2792604
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AC11
Product key	ACHCCB
GTIN	4017918365318
Weight per piece (including packing)	79.21 g
Weight per piece (excluding packing)	71.086 g
Customs tariff number	85369010
Country of origin	DE



https://www.phoenixcontact.com/us/products/2792604



### Technical data

#### Product properties

Product type	Complete housing
Housing type	Complete housing
Housing series	UEG
Product family	UEGM
Туре	Connection system integrated, housing closed
Number of positions	12
Pitch	5 mm
Number of rows	1
Pin layout	Linear pinning

#### Electrical properties

Nominal voltage U <sub>N</sub>	500 V (Voltage and current values are affected by the configuration of the printed circuit board.)
Nominal current I <sub>N</sub>	10 A

#### Connection data

Connection method Sc	crew connection
----------------------	-----------------

#### **Dimensions**

Dimensional drawing	25.5 88.5 88.5 8.5 8.5 8.5 8.5 8.5 8.5 8.
Width	40 mm
Height NS 35/7,5	85.5 mm
Depth	79 mm
Length	79 mm
Pitch	5 mm

#### Material specifications

Color	blue
Flammability rating according to UL 94	V2
Housing material	Polyamide

#### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-40 °C 105 °C



2792604

https://www.phoenixcontact.com/us/products/2792604

### Mounting

Mounting type	Soldering
Pin layout	Linear pinning





https://www.phoenixcontact.com/us/products/2792604



### Drawings

#### Dimensional drawing

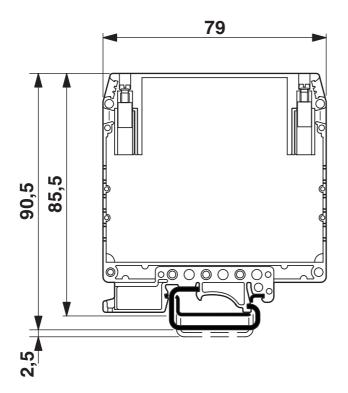

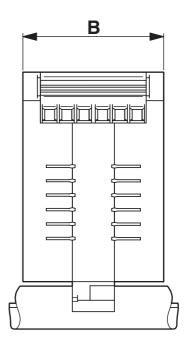


2792604


https://www.phoenixcontact.com/us/products/2792604



### Schematic diagram

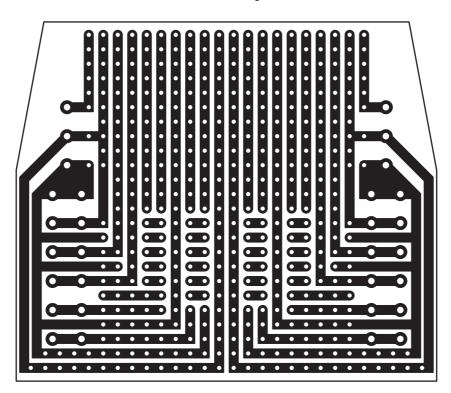

#### Exploded view

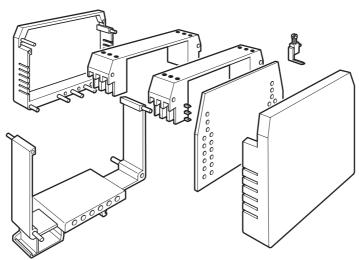




https://www.phoenixcontact.com/us/products/2792604



### Dimensional drawing

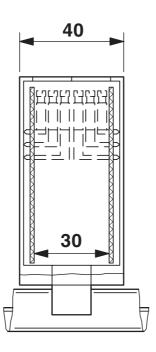




2792604

https://www.phoenixcontact.com/us/products/2792604

### Dimensional drawing

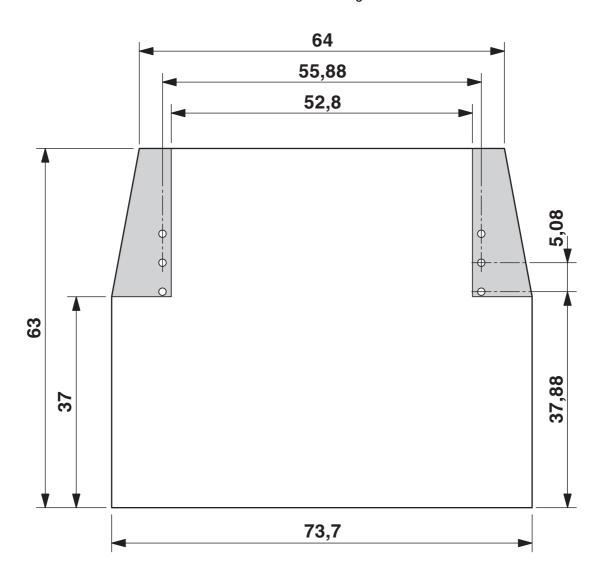



https://www.phoenixcontact.com/us/products/2792604



### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2792604

CULus Recognized Approval ID: E60425-19770427				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group B				
	300 V	10 A	30 - 12	-
Use group D				
	300 V	10 A	30 - 12	-



2792604

https://www.phoenixcontact.com/us/products/2792604

### Classifications

#### **ECLASS**

	ECLASS-11.0	27182702
	ECLASS-13.0	27190101
ΕΊ	ГІМ	
	ETIM 8.0	EC001031
U	NSPSC	
	UNSPSC 21.0	31261500



2792604

https://www.phoenixcontact.com/us/products/2792604

### Environmental product compliance

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



2792604

https://www.phoenixcontact.com/us/products/2792604

#### Accessories

DB 50-90 GY - Wire bridge

2820929

https://www.phoenixcontact.com/us/products/2820929

Flexible wire loop bridge, 50-pos., conductor cross-section: 0.5 mm<sup>2</sup>, loop length: 90 mm, ferrule length: 8 mm, color: gray



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com